



# Product Catalog

Illuminating the World with Superior Quality

About us



# Catalogue



Catalogue .....	01
Brand Story .....	03
Product Export .....	05
Core Advantage .....	07
Downlight .....	09
LED Downlight .....	15
LED Downlight Retrofit .....	19
Other Categories .....	25
Ceiling Light .....	30
Flush Mount Ceiling Light .....	35
LED Flat Panel .....	38
LED Flat Panel .....	43
LED Ceiling Fan .....	47
Ceiling Fan with Light .....	53
Fandelier Ceiling Fan with Light .....	59
Emergency Lights .....	61
Emergency Lights .....	67





## Brand Story

" Illuminating the World with  
Superior Quality " :

Amico is an emerging lighting-technology brand that is co-founded by a group of senior R&D experts who specialized in the LED lighting industry.

We stick to our brand value of " illuminating the world with superior quality ".

We pursue the frontier of tech-driven leadership and reliable quality in product, and provide high-quality products at reasonable prices, and deliver you with excellent support and shopping experience.

Global  
Service Network



# Product Export



# Core Advantage

**10** Years

Focus on lighting industry  
for 10 years.

**NO. 1**

No. 1 seller on Amazon.


**50** Countries

Already sold in more than 50 countries  
and regions worldwide.

**231** Patents

Possesses 231 patents for  
self-developed lamp inventions.

# Part 01 Downlight

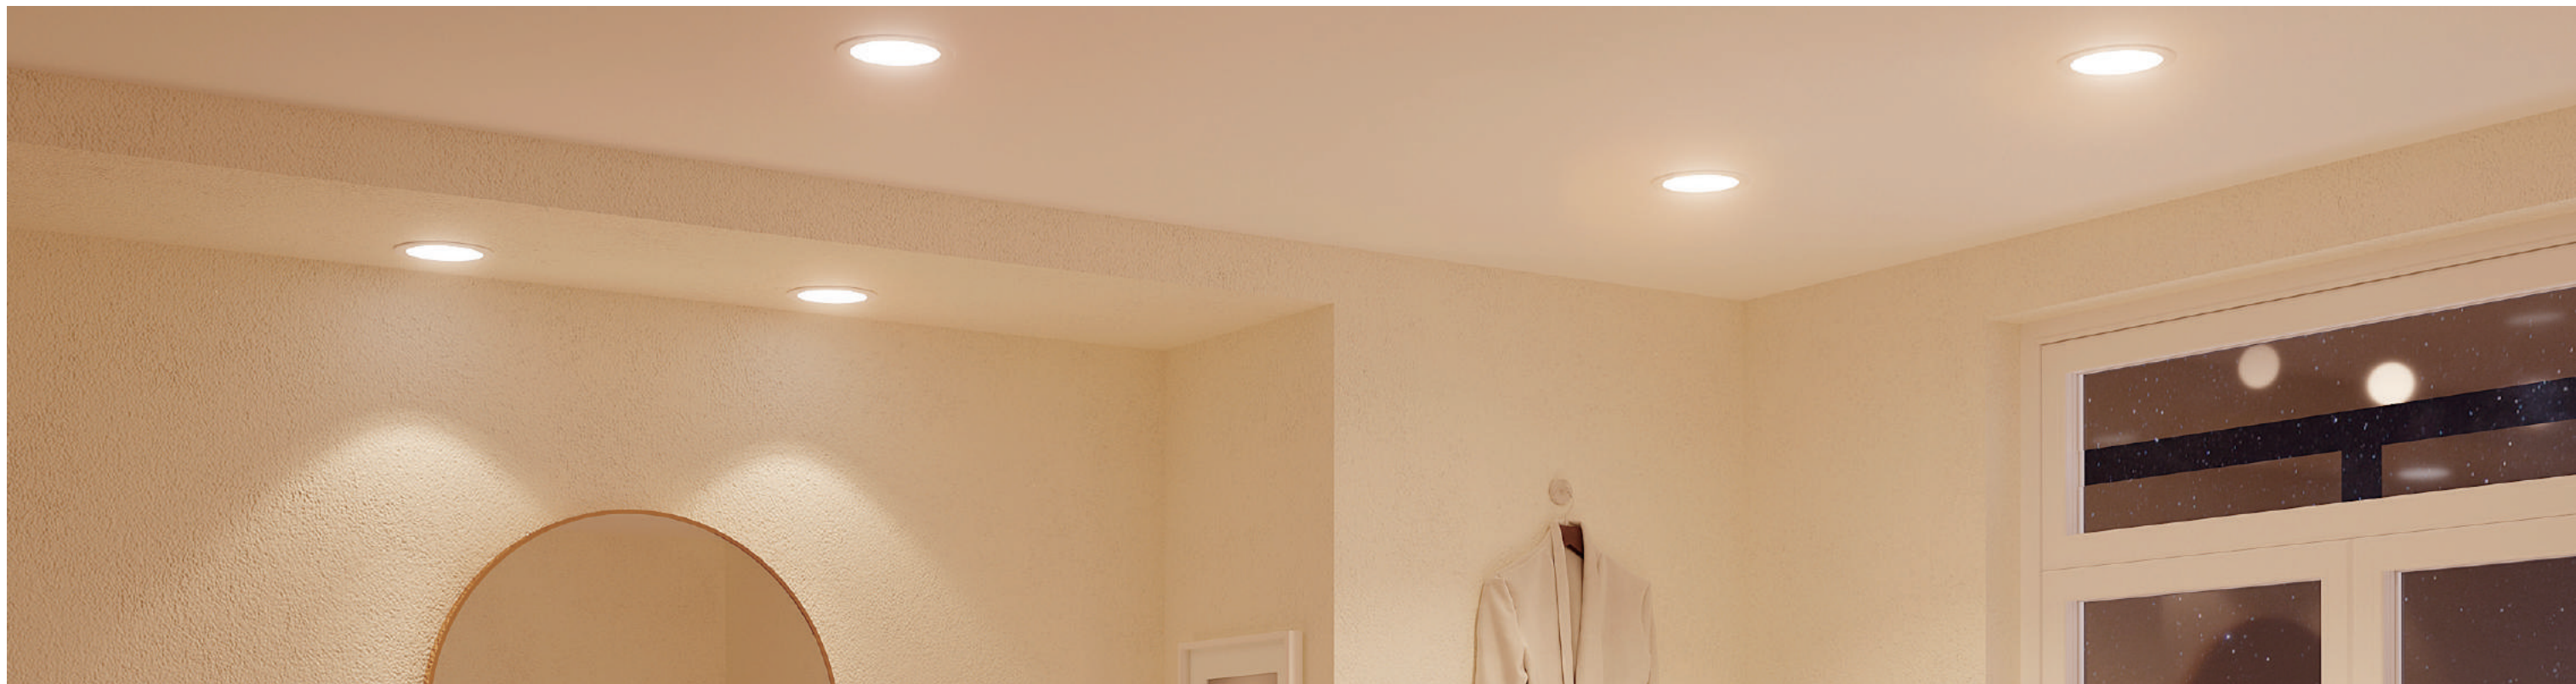



# Certification & Technology



- ▶ Short time voltage resistance, short circuit protection.
- ▶ Damp location / Wet location
- ▶ Lightning protection 1KV .
- ▶ CCT
- ▶ With Google Home / alexa / FCC / ETL / and other global certification
- ▶ 1-10V / Triac dimming
- ▶ Bluetooth / Zigbee / Wi-Fi
- ▶ 5 Years Warranty
- ▶ Patent Development



2700K  
Soft White




3000K  
Warm White




4000K  
Warm White



5000K  
Cool White

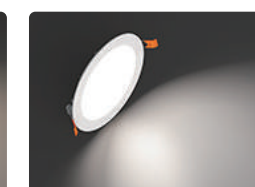

6000K  
Daylight

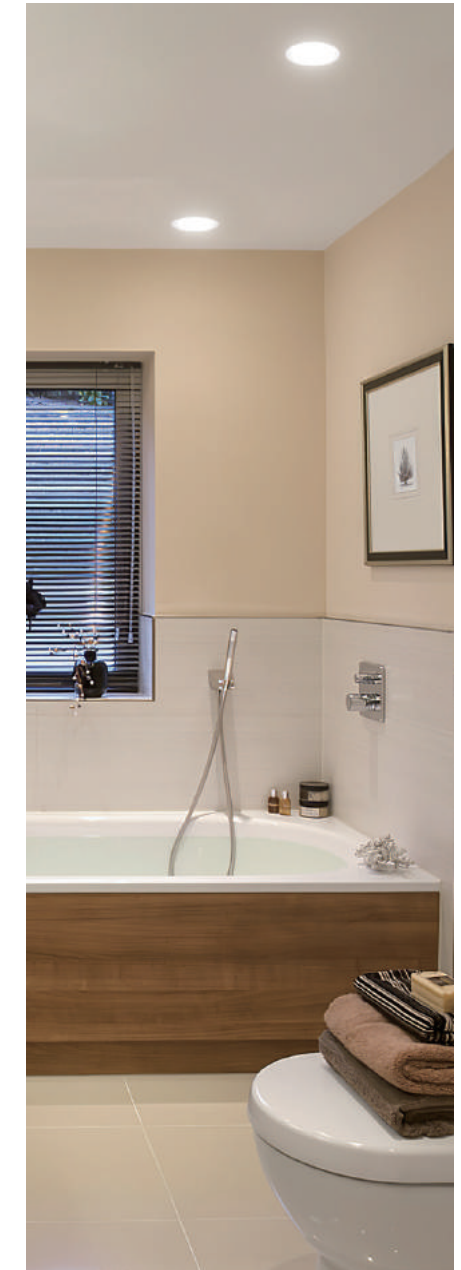


For every scenario in your home.  
Suitable for all kinds of decoration styles.



# LED Slim Panel Downlight



## LED Slim Panel Downlight

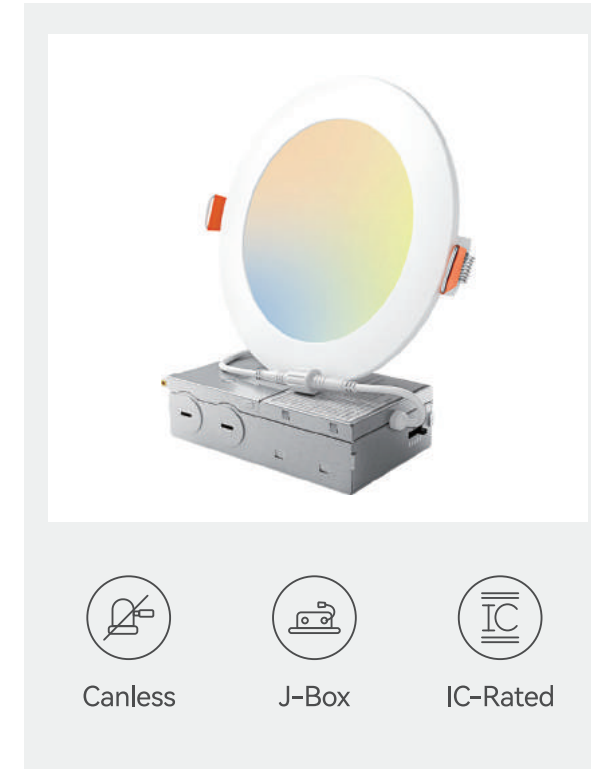

**Feature:**

- Thin J-Box ideal for narrow ceiling
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

**Applications:**

Residential Home / Office and Retail / Hotel



Canless



J-Box




IC-Rated

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120159	3 inch	120	7	500LM	>0.9	27/30/35/40/50K	80/90	120	White/Black
A1812143	4 inch	120	10	700LM	>0.9	27/30/35/40/50K	80/90	120	White/Black
A1812034	6 inch	120	12	950LM	>0.9	27/30/35/40/50K	80/90	120	White/Black
A18120161	8 inch	120	18	1500LM	>0.9	27/30/35/40/50K	80/90	120	White/Black

# LED Slim Panel with Night Light

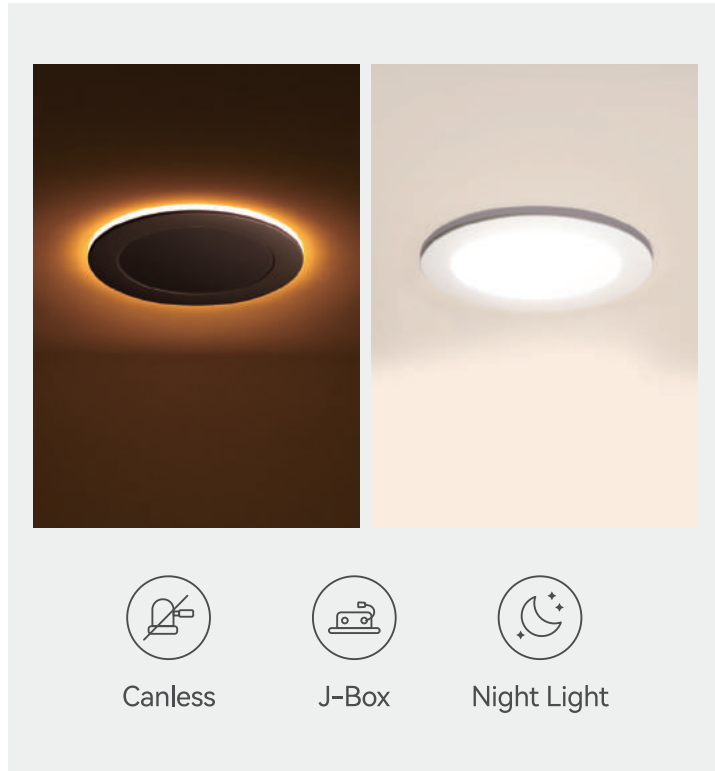

**Feature:**

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- Recessed can & junction box installation
- 50000 Hours Lifespan


**Applications:**

Residential Home / Office and Retail / Hotel

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18011112001	3 inch	120	7	500LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black
A18120160	4 inch	120	10	700LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black
A1812148	6 inch	120	12	950LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black
A18011112002	8 inch	120	18	1500LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White/Black

# Smart LED Slim Panel Downlight

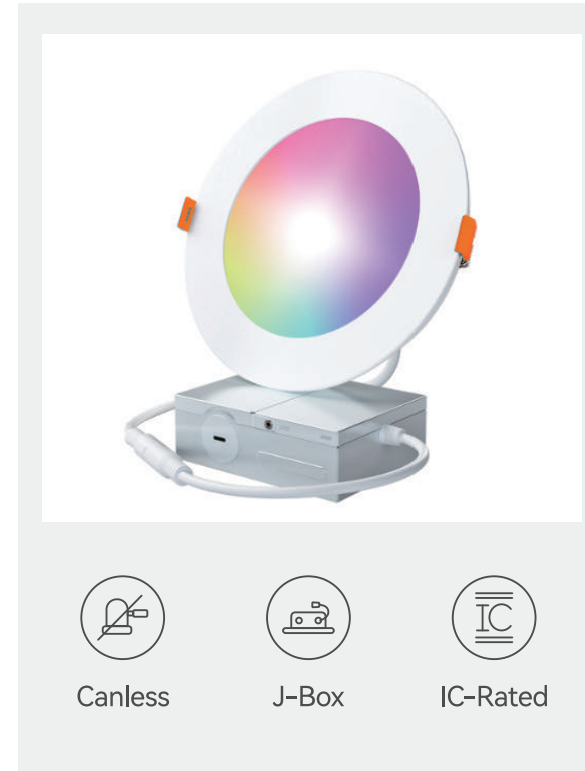

**Feature:**

- Work with Alexa & Google Home
- CCT: RGBCW
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

**Applications:**

Residential Home / Office and Retail / Hotel

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18030512002	6 inch	120	12	1000LM	>0.9	RGBCW	80/90	120	White
A18030512001	4 inch	120	10	700LM	>0.9	RGBCW	80/90	120	White






LED



# Downlight Retrofit

## LED Downlight Retrofit

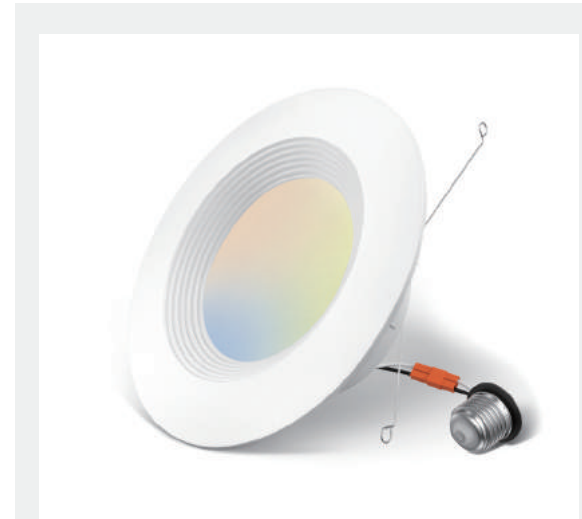

**Feature:**

- Baffle Trim for grooved interior creates a soft and glare-free spotlight
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

**Applications:**

Residential Home / Office and Retail / Hotel



Easy  
Installation



High  
Brightness




Smooth  
Dimming

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18020424011	4 inch	120	7	600LM	>0.7	27/30/35/40/50K	80/90	120	White
A1824122	5/6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	80/90	120	White

# LED Downlight Retrofit with Night Light

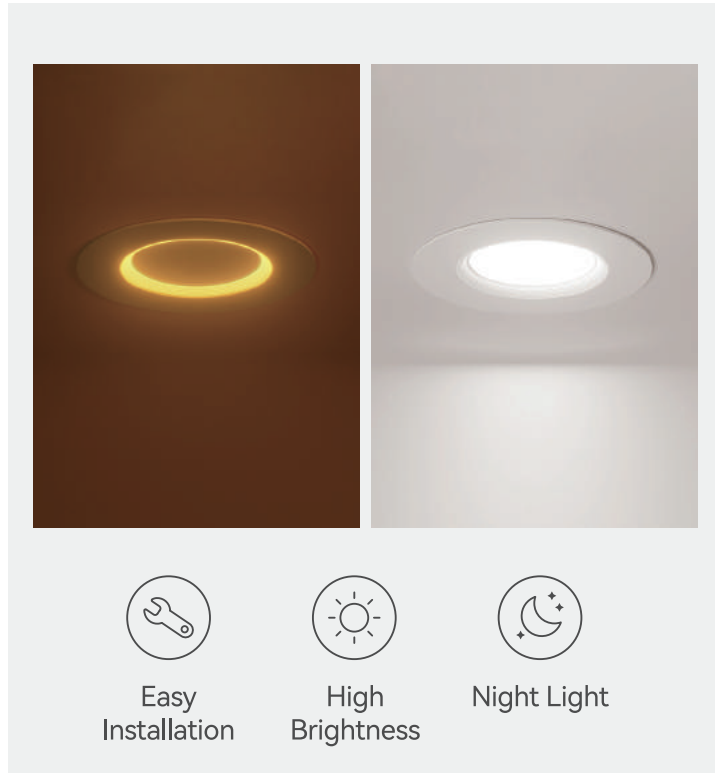

**Feature:**

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan


**Applications:**

Residential Home / Office and Retail / Hotel

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18021212001	4 inch	120	9	700LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White
A18021212003	6 inch	120	12	1050LM	>0.9	27/30/35/40/50K	2000K	80/90	120	White

# LED Ultra-Thin Recessed Downlight Retrofit

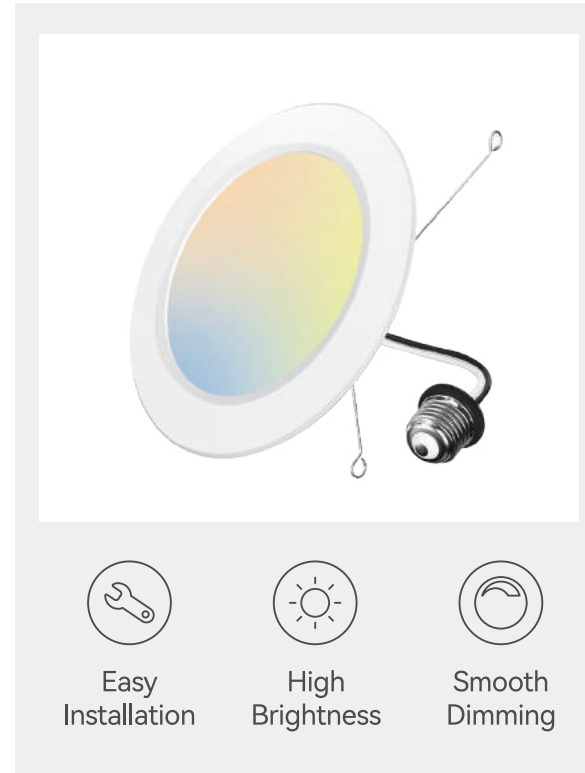

**Feature:**

- Ultra thin design for low profile ceiling
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

**Applications:**

Residential Home / Office and Retail / Hotel

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120158	6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	80/90	120	White
A18021324002	4 inch	120	7	700LM	>0.7	27/30/35/40/50K	80/90	120	White



## LED Smooth Trim Downlight Retrofit with Night Light



### Feature:

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

### Applications:

Residential Home / Office and Retail / Hotel



Easy Installation



High Brightness




Night Light

### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18021324003	6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White
A18021324001	4 inch	120	7	700LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White

## LED Downlight Retrofit with Night Light

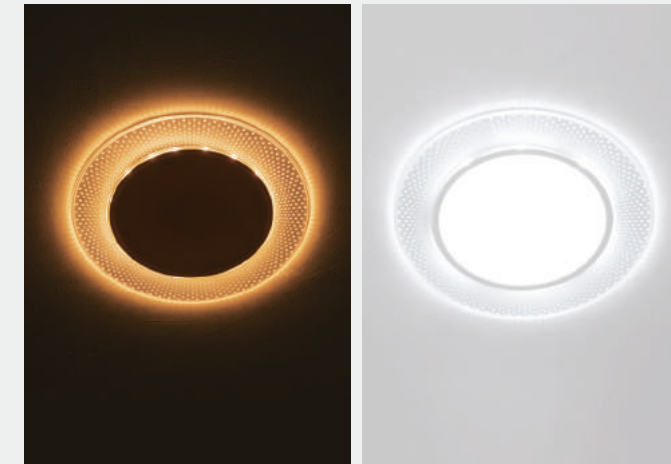

### Feature:

- Night light feature for gentle glow illuminating the acrylic trim
- Color Temperature Selectable
- 10-100% Dimmable ;
- Easy and Safe Installation ;
- Suitable for damp location;
- 50000 Hours Lifespan ;

### Applications:

Residential Home / Office and Retail / Hotel



Easy Installation



High Brightness



Night Light


### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	Night	CRI	Beam Angle	Finish
A18020501001	6 inch	120	10	900LM	>0.7	27/30/35/40/50K	2000K	80/90	120	White

# Other Categories



## LED Flush Mount Disk Light

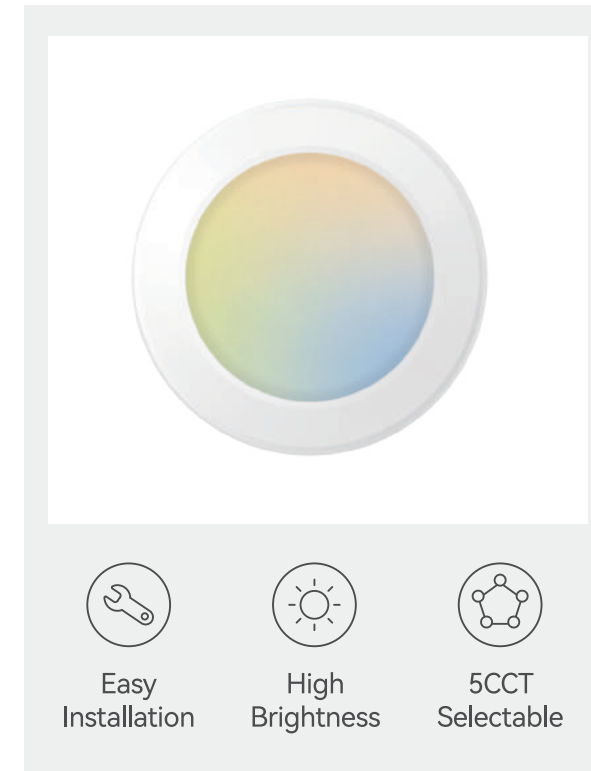

**Feature:**

- Ultra thin design for low profile ceiling
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- Recessed can & junction box installation
- 50000 Hours Lifespan

**Applications:**


Residential Home / Office and Retail / Hotel

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18240180	6 inch	120	10	1000LM	>0.7	27/30/35/40/50K	80/90	120	White



## LED Slim Panel Recessed Ceiling Light

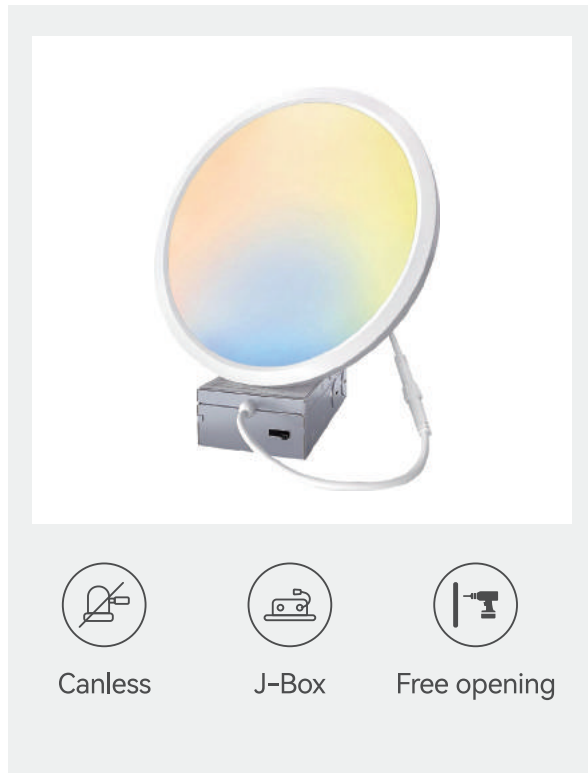

### Feature:

- Ultra thin design for low profile ceiling
- Color Temperature Selectable
- Easy and Safe Installation
- 50,000 hours Lifespan
- Suitable for damp location
- 50000 Hours Lifespan

### Applications:

Residential Home / Office and Retail / Hotel



Canless



J-Box




Free opening

### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120174	5 inch	120	12	900LM	>0.9	27/30/35/40/50K	80/90	120	White
A1812097	7 inch	120	15	1200LM	>0.9	27/30/35/40/50K	80/90	120	White

## LED Adjustable Gimbal Recessed Downlight

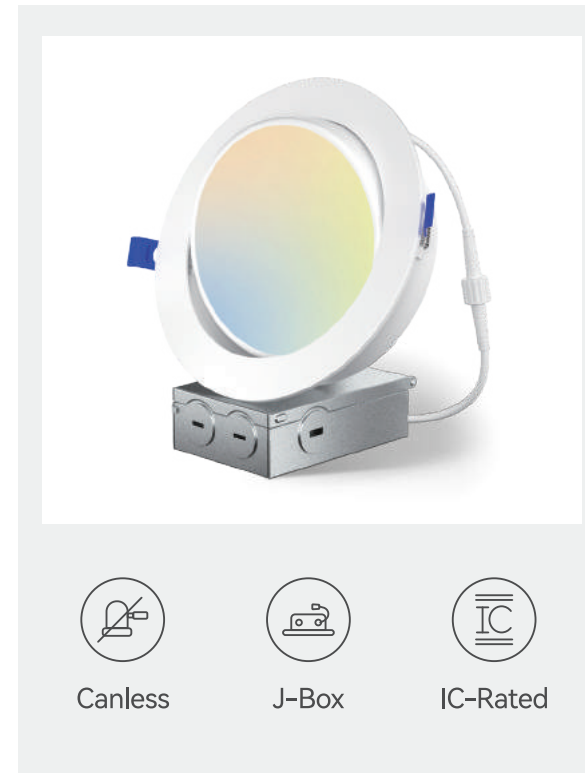

### Feature:

- Ideal for sloped ceilings, wall washing, highlight artwork, task and general lighting
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

### Applications:

Residential Home / Office and Retail / Hotel



Canless



J-Box




IC-Rated

### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18120175	6 inch	120	12	1000LM	>0.9	27/30/35/40/50K	80/90	120	White

# LED Eyeball Recessed Downlight

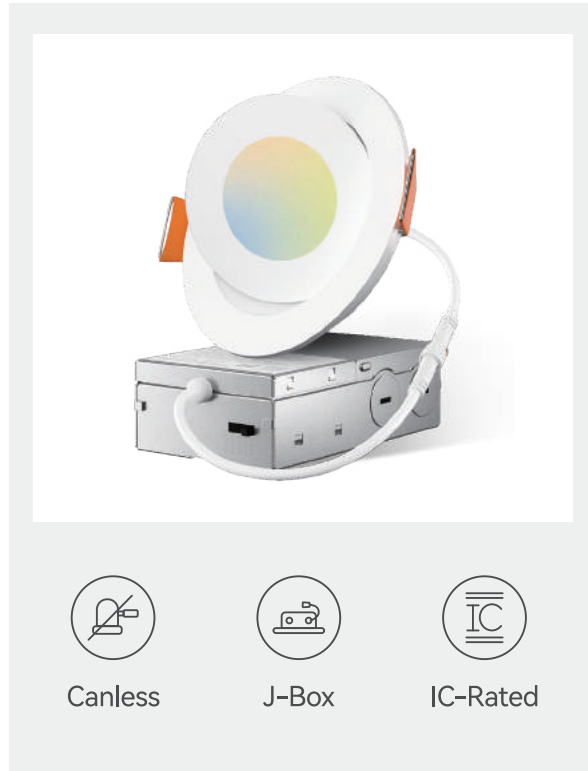

**Feature:**

- Ideal for sloped ceilings, wall washing, highlight artwork, task and general lighting
- Color Temperature Selectable
- 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan;

**Applications:**

Residential Home / Office and Retail / Hotel



Canless



J-Box



IC-Rated

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A18021324001	4 inch	120	9	700LM	>0.7	27/30/35/40/50K	80/90	38	White

## About Our Products

1 Flush Mount  
Ceiling Light

# Part 02 Ceiling Light





# Certification & Technology



- 
- ▶ Short time voltage resistance, short circuit protection.
  - ▶ Damp location / Wet location
  - ▶ Lightning protection 1KV .
  - ▶ CCT
  - ▶ With Google Home / alexa / FCC / ETL / and other global certification
  - ▶ Triac dimming
  - ▶ 2 Years Warranty
  - ▶ Patent Development



2700K  
Soft White

3000K  
Warm White

4000K  
Warm White

5000K  
Cool White

6500K  
Daylight




For every scenario in your home.  
Suitable for all kinds of decoration styles.





# Flush Mount Ceiling Light

## Double Ring LED Ceiling Light

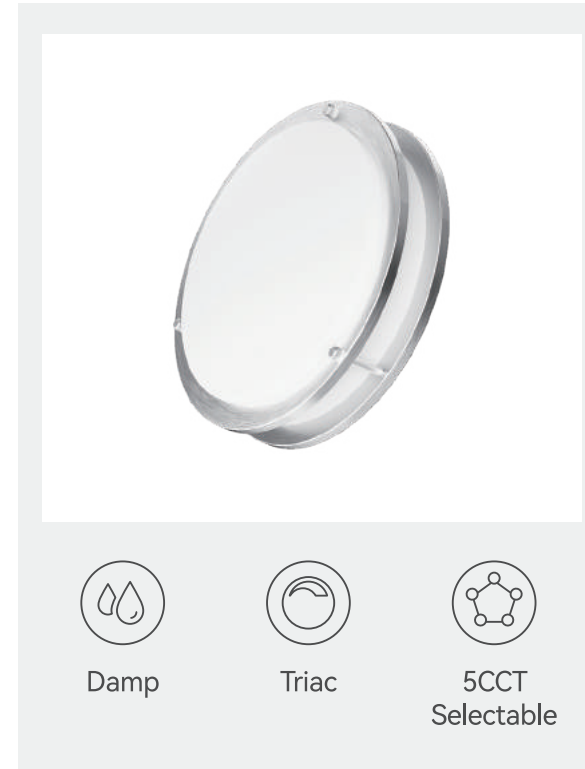

### Feature:

- Allows for easy adjustment of output and color
- Multiple lights in 1 fitting, less SKU, less inventory cost
- Sensor optional for more energy saving
- Frosted polycarbonate lens
- Triac dimmable
- Brush nickel(stainless steel) finish
- Damp location suitable
- Easy installation

### Applications:

Residential Home / Office and Retail / Hotel



Damp



Triac



5CCT  
Selectable

### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A2502020	10 inch	120	16	1200LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502021	12 inch	120	20	1600LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502022	14 inch	120	24	2000LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502023	16 inch	120	28	2400LM	>0.7	27/30/35/40/50K	80	110	Nickel
A2502024	18 inch	120	34	2800LM	>0.7	27/30/35/40/50K	80	110	Nickel

# Slim Panel Ceiling Light



### Feature:

- Allows for easy adjustment of output and color
- Frosted polycarbonate lens
- Triac dimmable
- Damp location suitable
- Easy installation
- Modern design



Damp



Triac



5CCT Selectable

### Applications:

Residential Home / Office and Retail / Hotel

### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle	Finish
A2502025	12 inch	120	24	1800LM	>0.7	27/30/35/40/50K	80/90	120	Nickel

## About Our Products

# Part 03 LED Flat Panel





# Certification & Technology



- ▶ High Efficiency Isolated Constant Current Driver
- ▶ Damp location
- ▶ FCC / ETL / DLC / and other global certification
- ▶ 120-277V / 120-347V input voltage range
- ▶ Lightning protection 2KV .
- ▶ 3 CCT & 3 LUMEN SELECTABLE
- ▶ 5 Years Warranty
- ▶ 0-10V dimming / Triac dimming



4000K  
Warm White




5000K  
Daylight



6500K  
Cool Daylight



# Scenarios

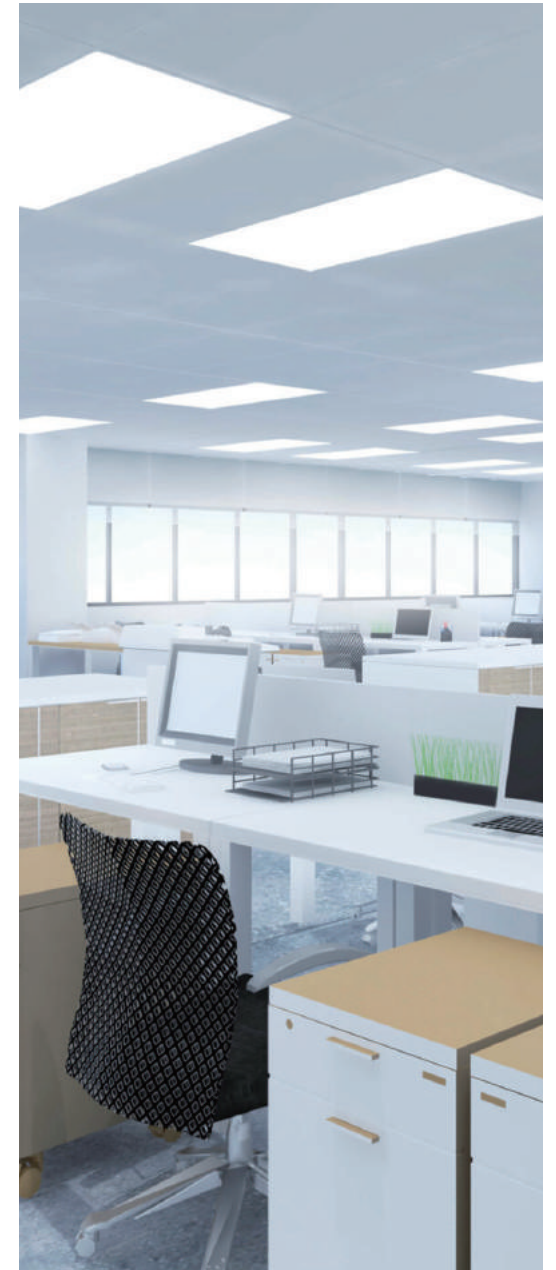

Suitable for a wide range of use scenarios.  
Suitable for all kinds of decoration styles.



# LED Flat Panel

## 2x4FT LED Flat Panel light



**Feature:**

- Back-lit emitting, Ultra slim design, light weight
- Meet DLC 5.1 standard and premium version
- 3CCT and 3 wattages selectable
- 0-10V Dimming
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

**Applications:**

Office and conference rooms / Supermarkets / Hospital and shops etc.



Easy  
Installation



Damp



3CCT  
Selectable

**Technical Data**

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle
A22061467	2x4FT	120-277V or 120-347V	30-35-45	3600/4200/5500LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120
A06100106001	2x4FT	120-277V or 120-347V	34-45-50	4250/5400/6250LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120
A06100106003	2x4FT	120-277V or 120-347V	40-50-60	4500/6000/7500LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120

## 2x2FT LED Flat Panel light



### Feature:

- Back-lit emitting, Ultra slim design, light weight
- Meet DLC 5.1 standard and premium version
- 3CCT and 3 wattages selectable
- 0-10V Dimming
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

### Applications:

Office and conference rooms / Supermarkets / Hospital and shops etc.



Easy Installation



Damp



3CCT Selectable

### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle
A22061466	2x2FT	120-277V or 120-347V	20-30-35	2400/3300/4200LM	>0.9	3500K/4000K/5000K or 4000K/5000K/6500K	80	120

## 1x4FT Surface Mount LED Flat Panel Light



### Feature:

- Ultra thin design for surface mount
- 3CCT and 3 wattages selectable
- TRIAC 10-100% Dimmable
- Easy and Safe Installation
- Suitable for damp location
- 50000 Hours Lifespan

### Applications:

Residential Home / Office and Retail / Hotel



Easy Installation



High Brightness



Smooth Dimming


### Technical Data

Model No	Size	Input Voltage	Watts	Lumen	PF	CCT(Selectable)	CRI	Beam Angle
A06100202001	1x4FT	120	30-40-50	3750/4800/5750LM	>0.9	3500K/4000K/5000K	80	120



## Part 04

# LED Ceiling Fan

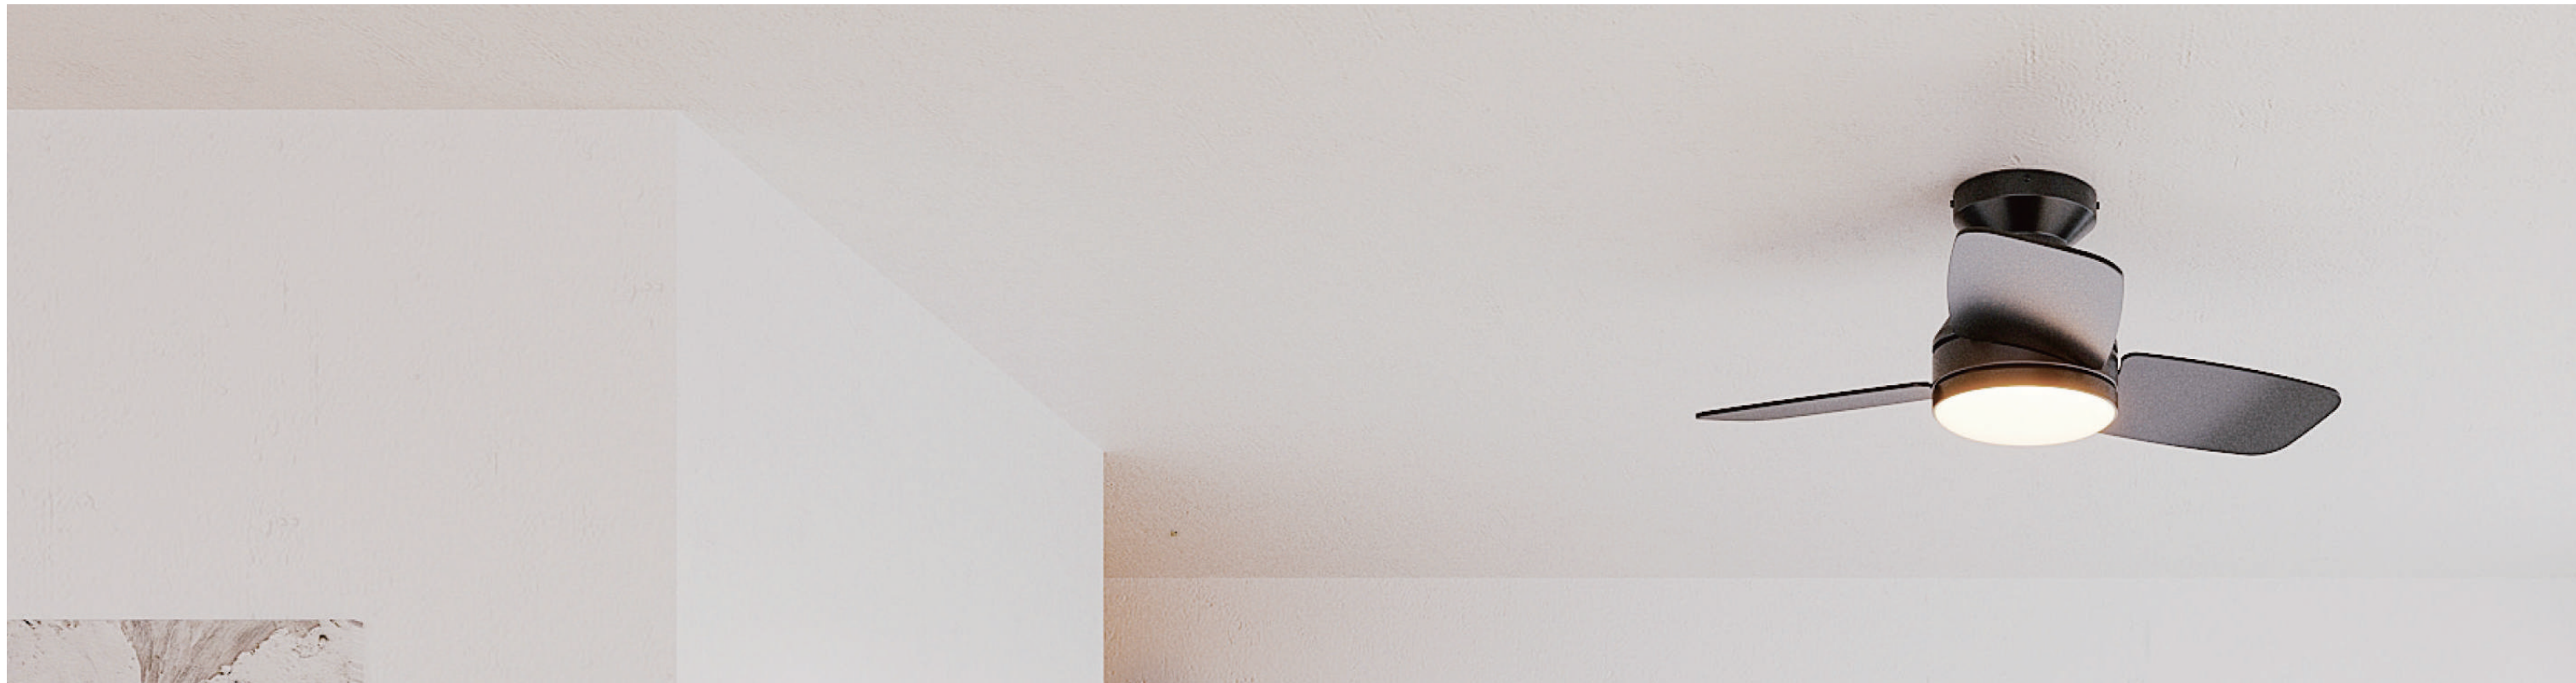

# Certification & Technology




- ▶ Ceiling Fans with Remote
- ▶ Low Profile Flush Mount
- ▶ 10-100% Dimmable
- ▶ Noise-free Experience
- ▶ With Google Home / alexa / FCC / ETL / and other global certification
- ▶ Reversible DC Motor
- ▶ Bluetooth / Zigbee / Wi-Fi
- ▶ Patent Development




30"



42"



52"



66"



72"






For every scenario in your home.  
Suitable for all kinds of decoration styles.





# Ceiling Fan with Light

## Ceiling Fan with light

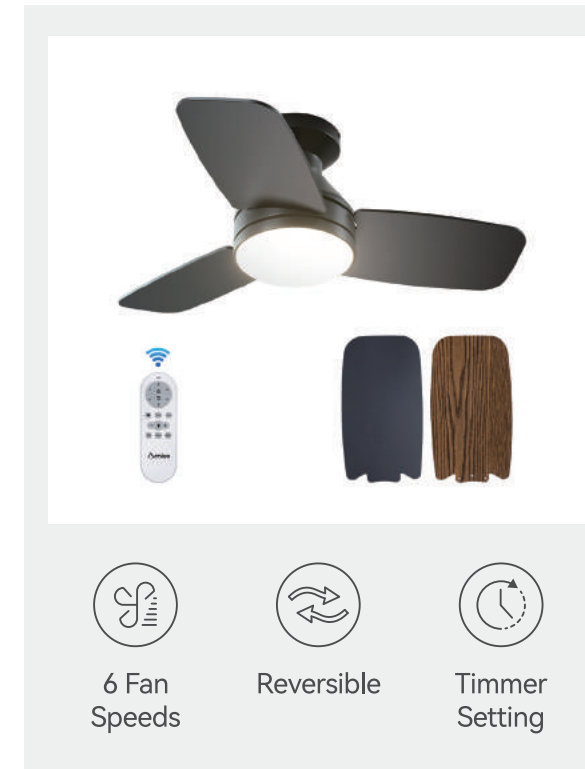

**Feature:**

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor  
2 years warranty for other parts

**Applications:**

Kitchen / Bedroom / LivingRoom  
/ Study Room / DiningRoom



6 Fan  
Speeds



Reversible




Timmer  
Setting

**Technical Data**

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
KFM30PLY01R1	30 inch	120	20+18	2087	1500LM	Plywood	3000K / 4000K / 6000K	3	Black
KFM30PLY02R1	30 inch	120	20+18	2087	1500LM	Plywood	3000K / 4000K / 6000K	3	White
KFM30PLY03R1	30 inch	120	20+18	2087	1500LM	Plywood	3000K / 4000K / 6000K	3	Nickel



# Ceiling Fan with light

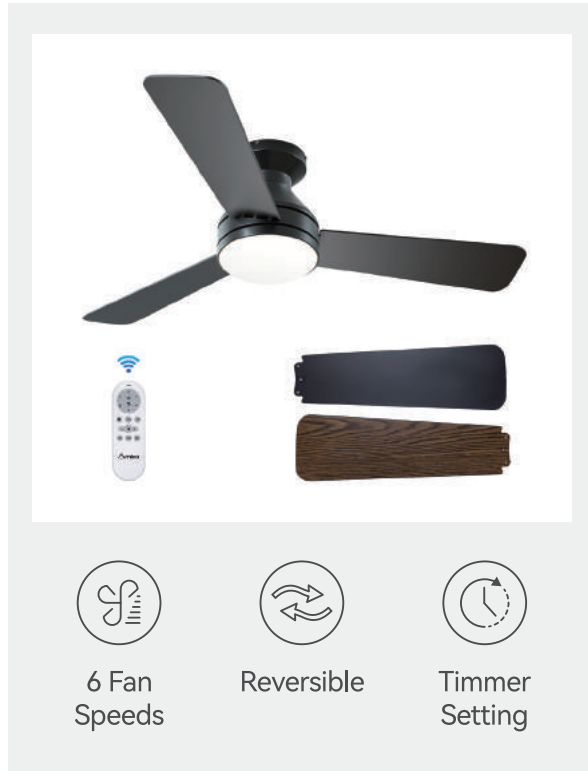

### Feature:


- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor  
2 years warranty for other parts

### Applications:

Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom



# Ceiling Fan with light

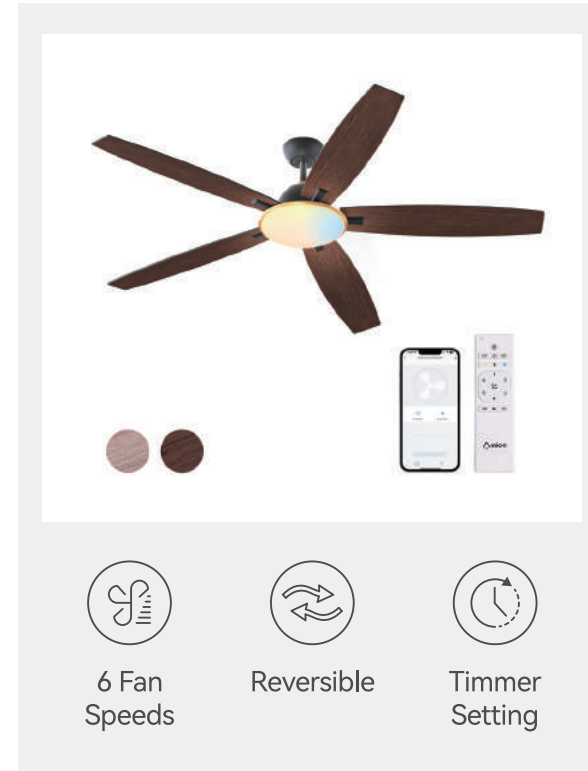


### Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor  
2 years warranty for other parts

### Applications:

Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom

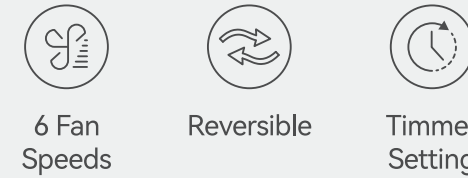

## Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
KFM42PLY01R1	42 inch	120	20+18	3326	1500LM	Plywood	3000K / 4000K / 6000K	3	Black
KFM42PLY02R1	42 inch	120	20+18	3326	1500LM	Plywood	3000K / 4000K / 6000K	3	White
KFM42PLY03R1	42 inch	120	20+18	3326	1500LM	Plywood	3000K / 4000K / 6000K	3	Nickel

## Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
A0505AX0101001	52 inch	120	20+24	2974	2000LM	Plywood	3000K / 4000K / 6000K	5	Black

## Ceiling Fan with light



### Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor  
2 years warranty for other parts

### Applications:

Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom



6 Fan Speeds



Reversible



Timmer Setting

### Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
8BCFWL66in	66 inch	120	39+20	6403	1500LM	Plywood	3000K / 4000K / 6000K	8	Black

## Ceiling Fan with light



### Feature:

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor  
2 years warranty for other parts

### Applications:

Kitchen / Bedroom / LivingRoom / Study Room / DiningRoom / Patio



6 Fan Speeds



Reversible




Timmer Setting

### Technical Data

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
72in8BCFWLABG	72 inch	120	41+24	8370	2000LM	Aluminum alloy	3000K / 4000K / 6000K	8	Black




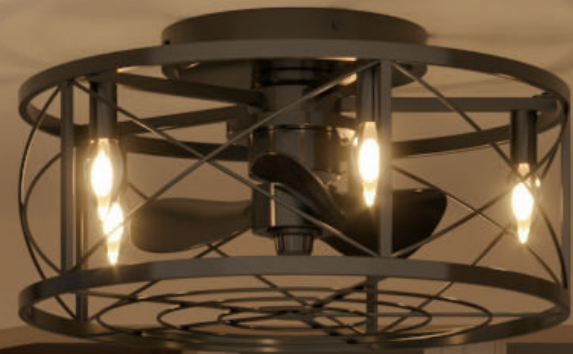

# Fandelier Ceiling Fan with Light



## Fandelier Ceiling Fan with Light

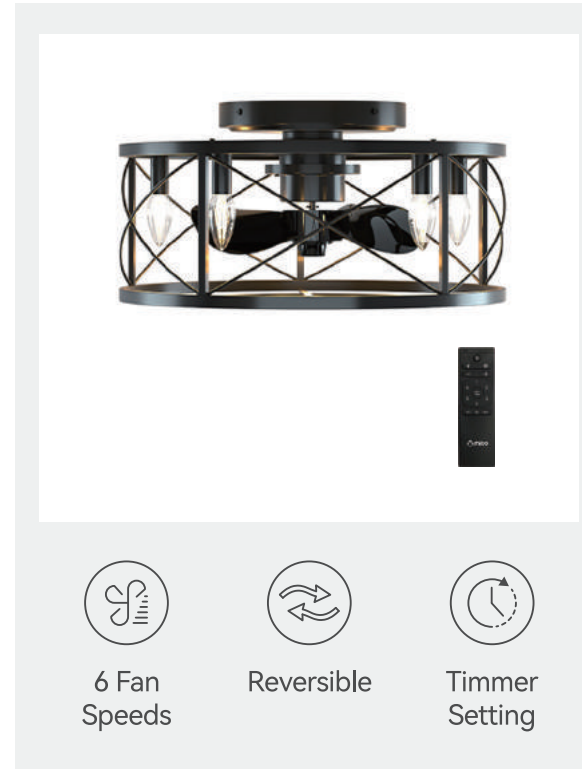

**Feature:**

- Ceiling Fans with Remote
- Low Profile Flush Mount
- 10-100% Dimmable
- Noise-free Experience
- Reversible DC Motor
- 10 years warranty for motor  
2 years warranty for other parts

**Applications:**

Kitchen / Bedroom / LivingRoom  
/ Study Room / DiningRoom



6 Fan  
Speeds



Reversible



Timmer  
Setting

**Technical Data**

Model No	Size	Input Voltage	Watts	CFM	Luminous Flux	Material of Blades	Color Temperature	Number of Blades	Finish
20inBLCFWLCAGE	20 inch	120	27*5*4	2300	1800LM	ABS	3000K	3	Black

# Part 05 Emergency Lights





# Certification & Technology



- 
- ▶ Innovative, easy installation in minutes
  - ▶ Universal J-box mounting pattern
  - ▶ 120-277VAC Dual Voltage operation
  - ▶ Maximum 24 Hours for full recharge time
  - ▶ Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
  - ▶ Test Switch and charge indicator
  - ▶ UL and cULus Listed
  - ▶ 0°C to 40°C indoor damp location listed




# Scenarios



Suitable for a wide range of use scenarios.  
Suitable for all kinds of decoration styles.



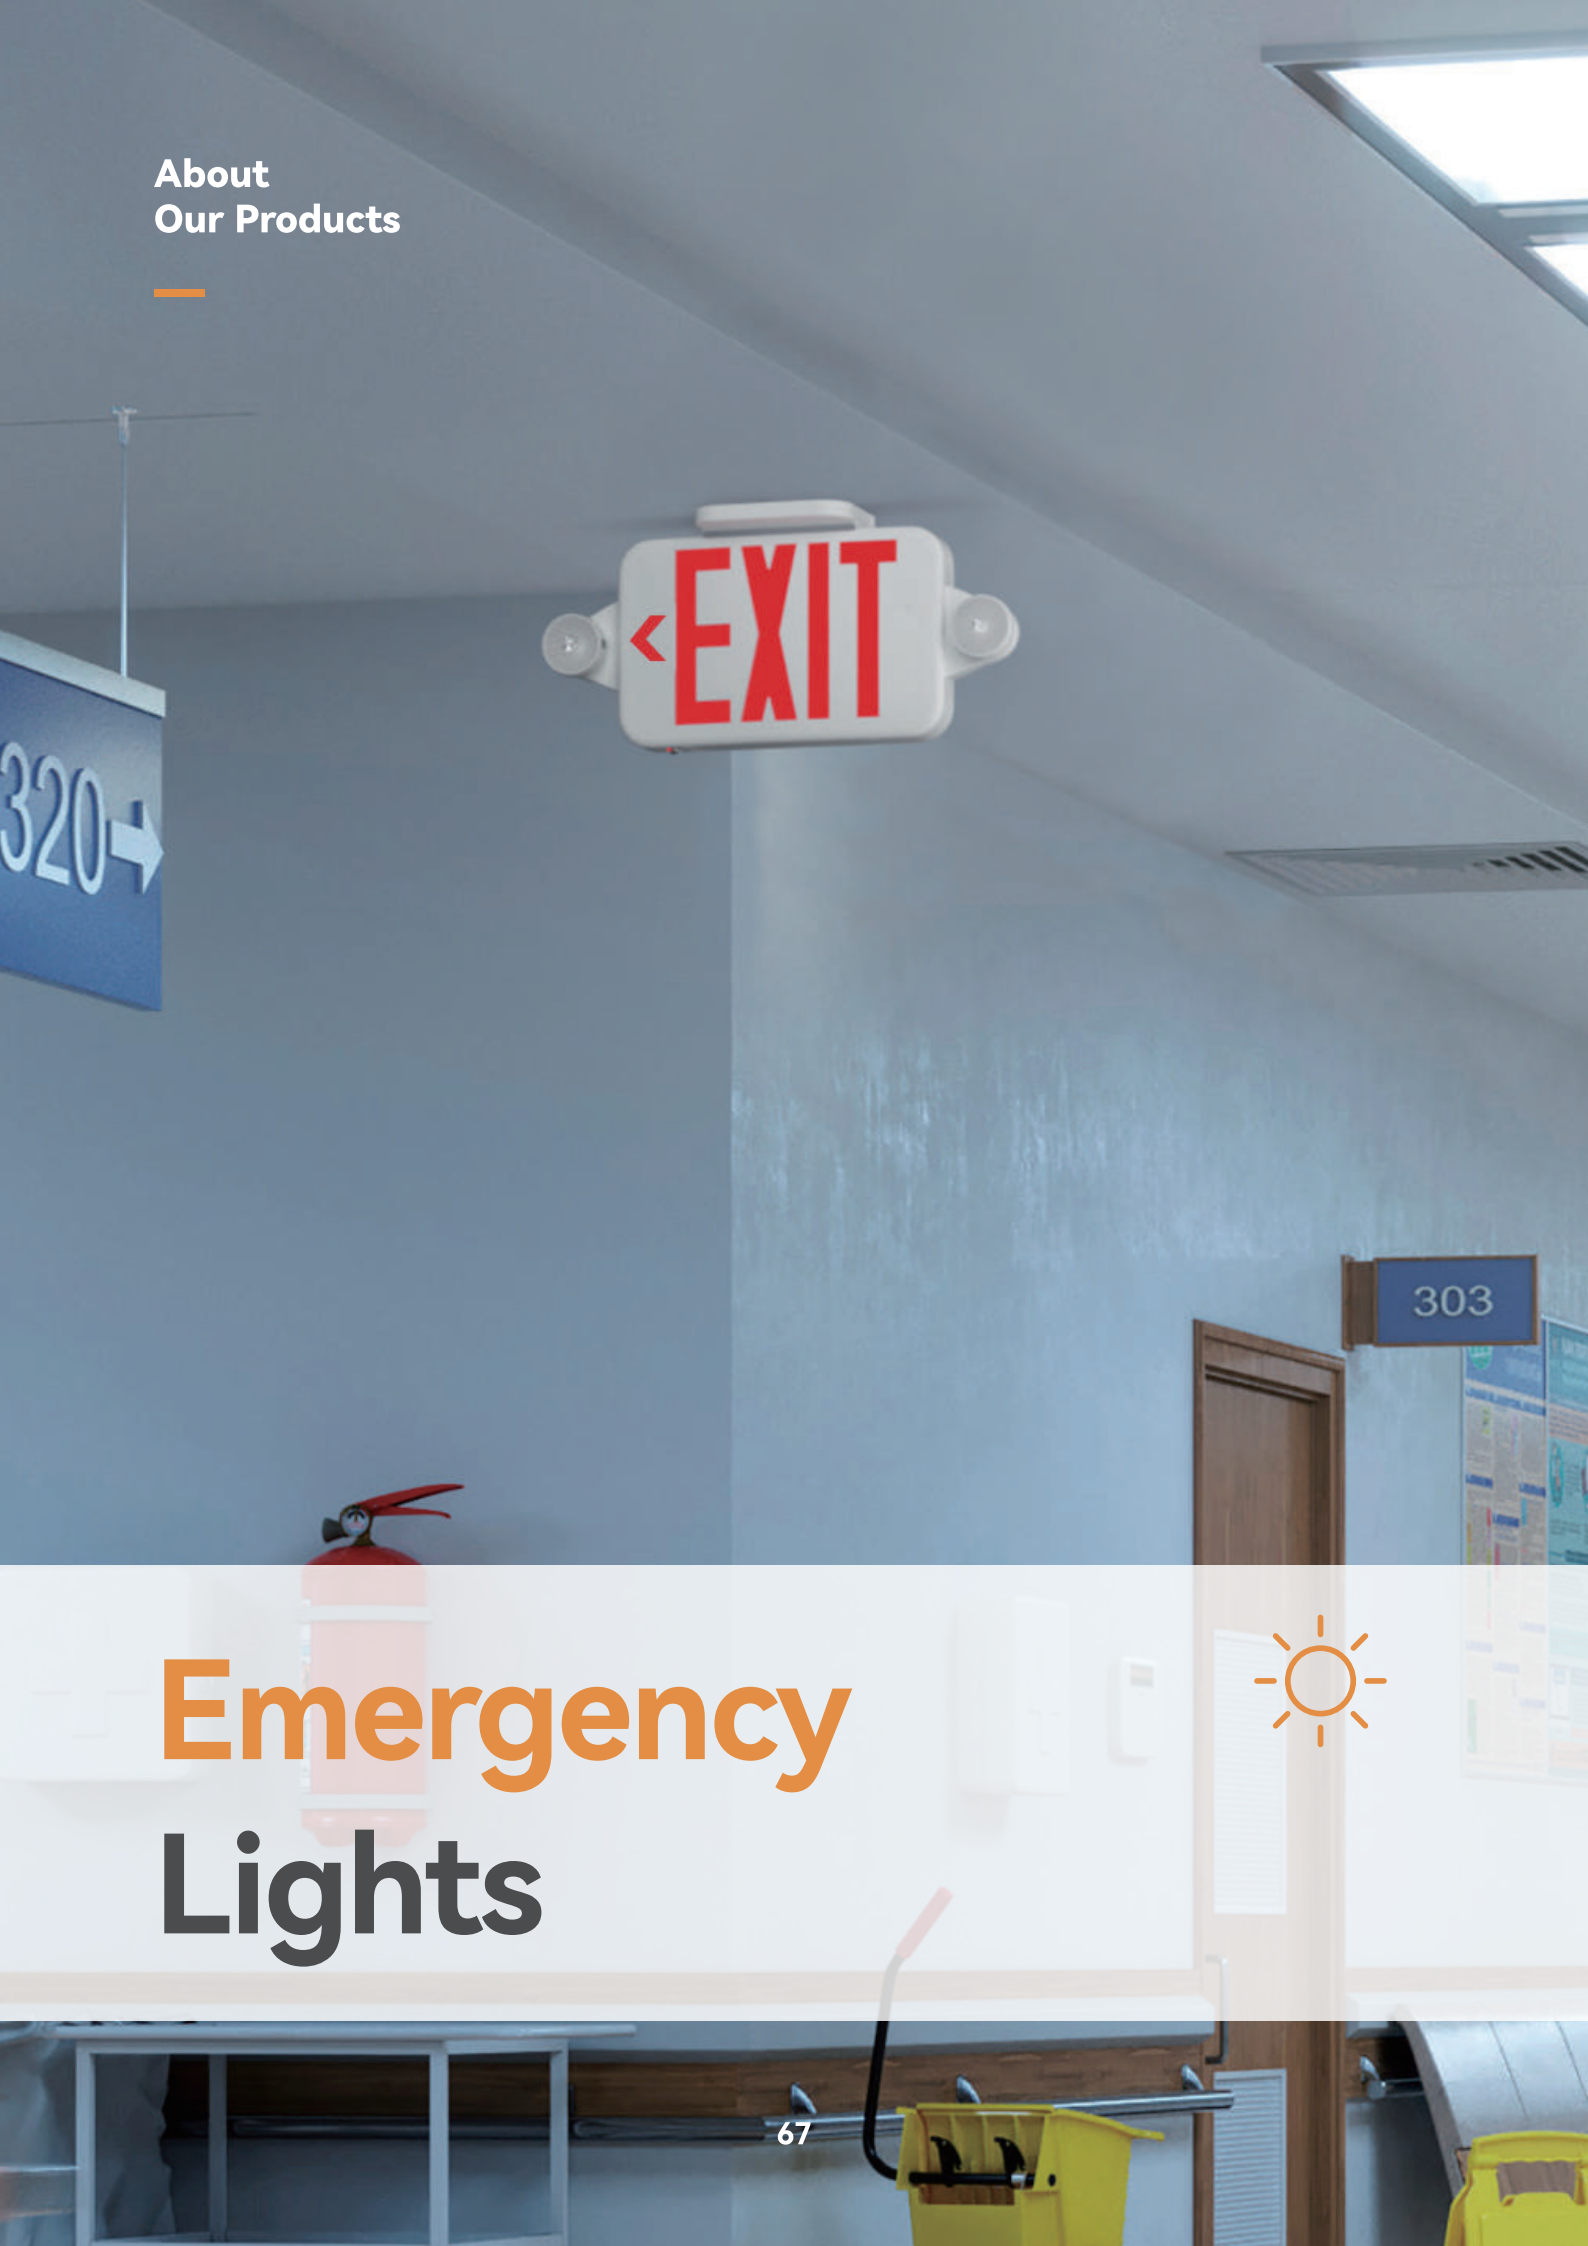

# Emergency Lights



## Commercial Lighted Exit Signs



### Feature:

- Innovative, easy installation in minutes
- Red lettering can be switched to Green
- SALIDA faceplate available
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2x1W 2835 SMT LED lamp heads for emergency mode
- Built-in 3.6V 1000mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

### Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A2102004	418*184*52mm	120-277V	2*1W	90 min	6500K	ABS	White

## Commercial Lighted Exit Signs



### Feature:

- Innovative, easy installation in minutes
- Red lettering can be switched to Green
- SALIDA faceplate available
- Single or double face(Universal)
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 1.2V 1000mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

### Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06060017	295*182*46mm	120-277V	1W	90 min	Red / Green	ABS	White

## Commercial Lighted Exit Signs



### Feature:

- Innovative, easy installation in minutes
- Ultra thin Exit sign and Combo
- Letters 6 height with 3/4 stroke
- Single or double face(Universal)
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 3.6V 1000mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed
- Ultra bright RED LED

### Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06060015L	430*193*46mm	120-277V	2*1W	90 min	6500K	ABS	White



# Commercial Lighted Exit Signs



### Feature:

- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke
- Optional RED letters
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 3.6V 500mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

### Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010201001	320*205*65mm	120-277V	2*1W	90 min	6500K	ABS	White

# Commercial Lighted Exit Signs



### Feature:

- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke
- Optional RED letters
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Built-in 3.6V 1200mAh NI-MH battery for minimum 90 minutes emergency operation
- Maximum 24 Hours for full recharge time
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

### Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010201003	320*339*65mm	120-277V	2*1W	90 min	6500K	ABS	White

## Commercial Emergency Light Fixtures



### Feature:

- Innovative, easy installation in minutes
- Suitable for wall applications
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Maximum 24 Hours for full recharge time
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

### Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A2104002	280*110*67mmC	120-277V	2*3WC	90 min	6500K	ABS	White

## Commercial Emergency Light Fixtures



### Feature:

- Innovative, easy installation in minutes
- Suitable for wall applications
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Maximum 24 Hours for full recharge time
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2X12pcs ultra bright 2835 SMT LED lamp heads for emergency mode
- Built-in 3.6V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

### Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010101003	349*95*89mm	120-277V	2*3W	90 min	6500K	ABS	White



# Commercial Emergency Light Fixtures



## Feature:

- Innovative, easy installation in minutes
- Suitable for wall applications
- Universal J-box mounting pattern
- 120-277VAC Dual Voltage operation
- Maximum 24 Hours for full recharge time
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- 2X12pcs Super bright 2835 0.5W LED lamp heads for emergency mode, provide more than 400Lm output
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Test Switch and charge indicator
- UL and cULus Listed
- 0°C to 40°C indoor damp location listed

## Technical Data

Model No	Size	Input Voltage	Watts	Emergency Time	Color Temperature	Housing Material	Finish
A06010101001	312*133*106mm	120-277V	2*6W	90 min	6500K	ABS	White