


5 IN 1 Slim Panel LED Recessed Downlight

Top Rated 6 Inch 5CCT Slim LED Downlight with Junction Box.

5 color temperature selectable, no need to worry about what color temperature to buy. Ultra-thin canless downlights only require as small as 2 inches ceiling spaces, fitting various ceilings, and joists. 1050LM consumes 12 Watts equivalent to 110W halogen lamp, saving you up to 90% in energy costs. 5-Year Warranty! We will be 100% responsible for our products!


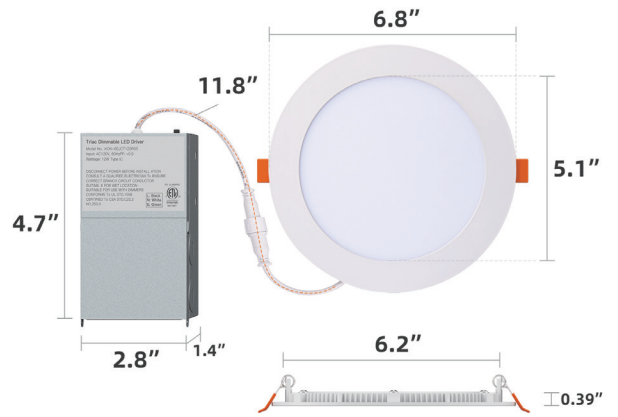


MODELS

A1820AX034 A1816AX034 A1812AX034
A1806AX034 A1801AX034



LIGHT DISTRIBUTION ANGLE

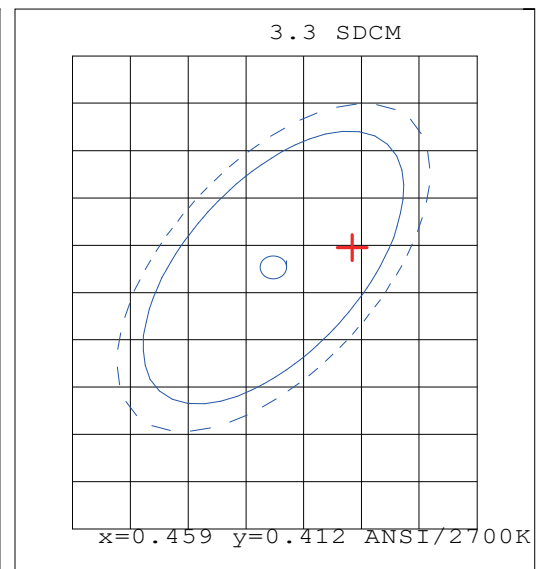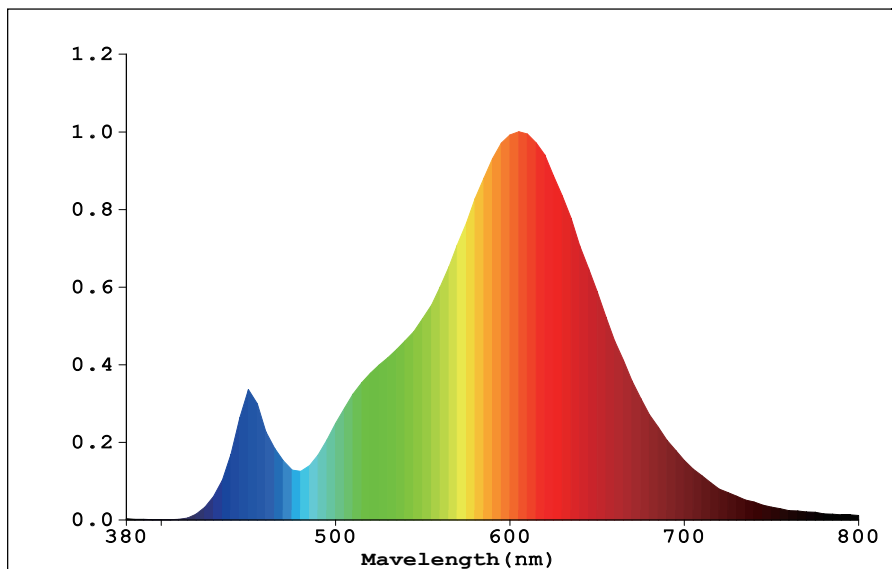

Chromaticity CIE1931 Diagram

SPECIFICATIONS

Input Voltage	120V	Efficiency(LM/W)	85Lm/W
Max output Voltage	36V	Frequency	60Hz
Wattage	12W	Operating Temperature	4°F-104°F
Input Current	0.12A	Suitable for Damp Locations Ingress	Yes
Max output Current	320mA	IC Rated	Yes
Power Factor	> 0.9	Housing	AL
Lumens	1050Lm	Weight	0.86lbs
Equivalency	110W	Wiring	Copper
Color Temperature	2700K/3000K/3500K/4000K/5000K	Average Life (Hours)	50000hours
CRI	80	Warranty	5years
Beam Angle	120°	Switching Time	> 30000
Dimmable	Yes		