



AR MACHINERY

Woodworking Technology

Offer: 12773

FEED THROUGH BORING MACHINE YZZ7P6M-AR



Emails: Rawad.rechdan@armachinery.net | Antoine.rechdan@armachinery.net

Tel: + 961 70 229 925 | + 961 3 427 812 | + 961 81 427 812

Address: Lebanon-Amchit LYANA Center



Technical Parameter


Model	Feed Through Boring Machine YZZ7P6M-AR		
Working width	96-1056mm	Working length	380-2750mm
Feed speed	35m/min	Working thickness	9-40mm
Upper vertical drill	14x3x2	Upper horizontal drill	2x3x2
Vertical drill	8 drills x2 bag	Horizontal drill	8 drills x2 bag
Max. long drill dimension	Φ15mm (optional per needs)	Feed motor power	0.37kwx6
Working air pressure	0.6-0.8mPa	Servo	DELTA
System	Beckhoff	Drill bag	Protean
AC contactor	Schneider	Air switch / Relay	Schneider
Guide rail/gearbox	FASTON	Pneumatic element	Airtac
PLC	DELTA	Triad	Airtac
Air conditioner	Shanghai Jingying	Machine size	L5980*W3050* H2600mm
Total power	54.67kw		











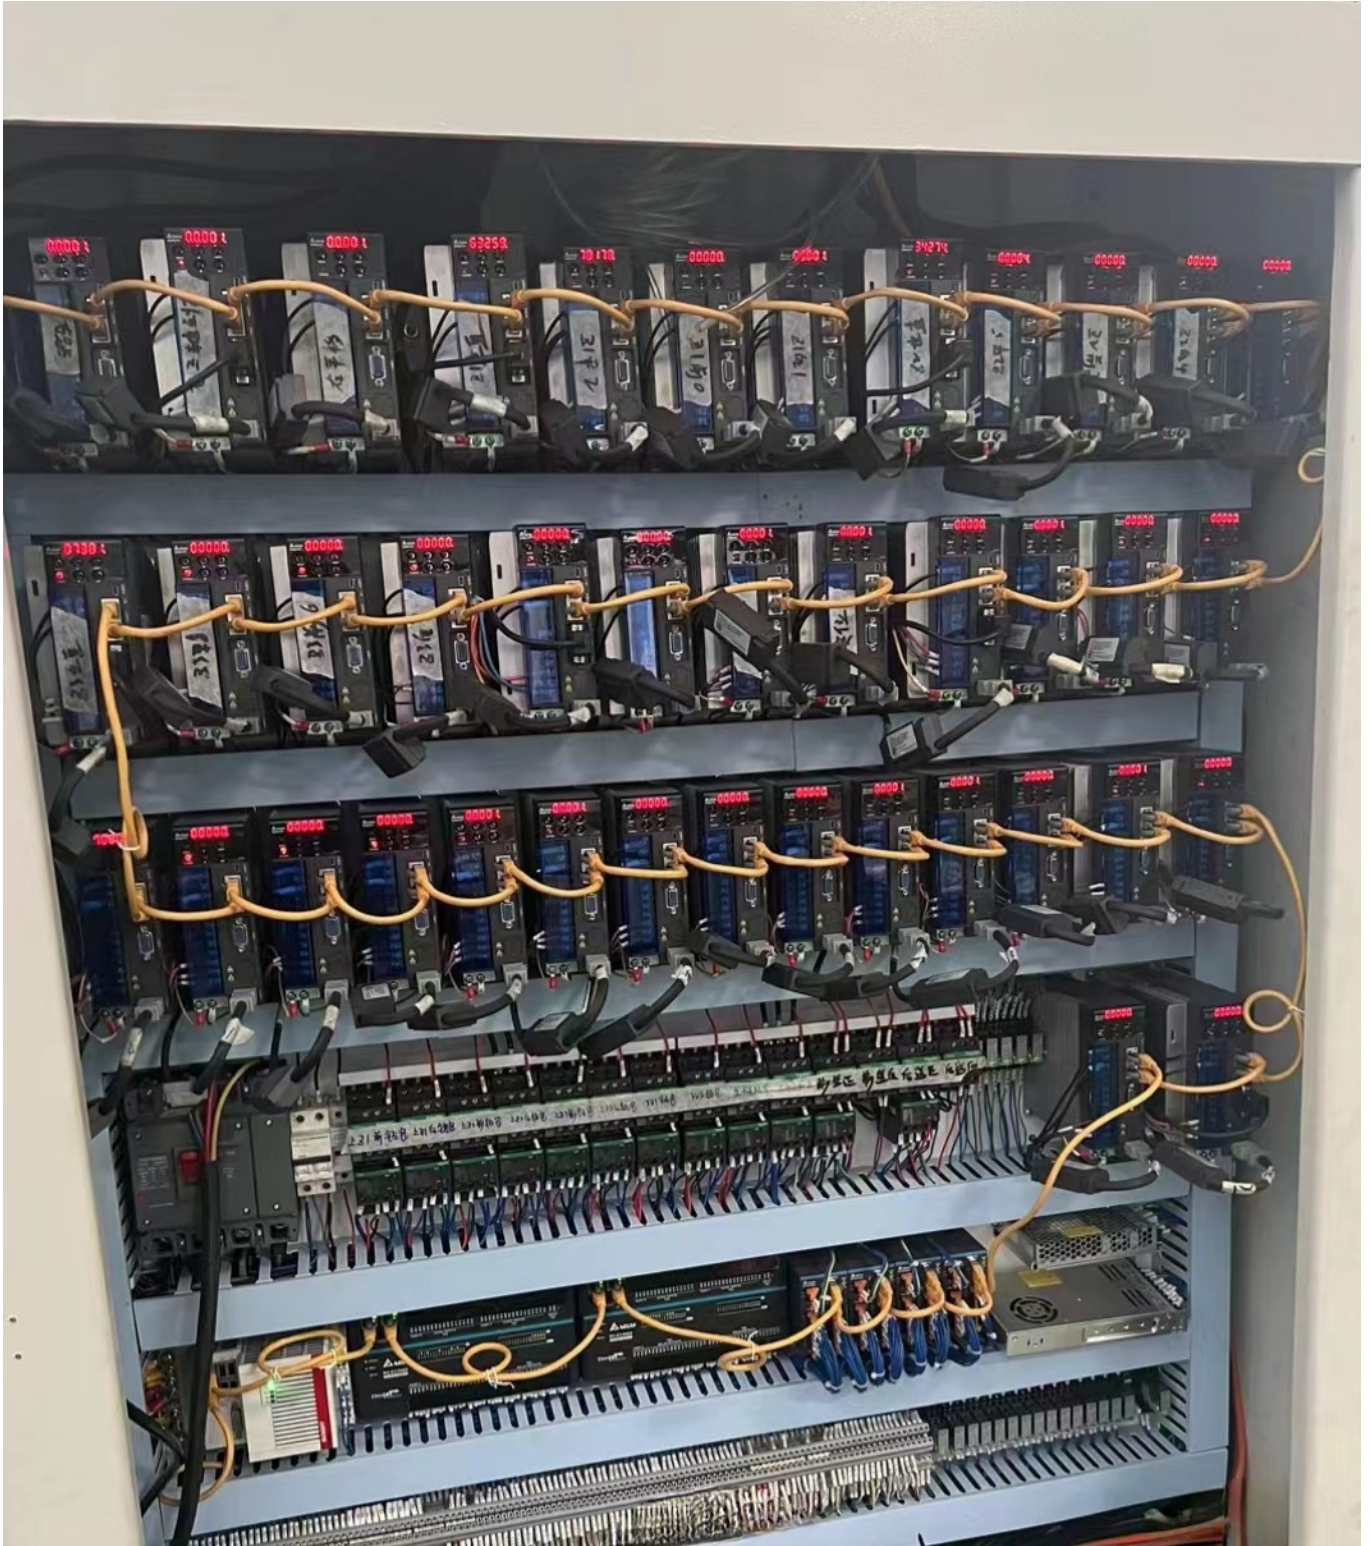

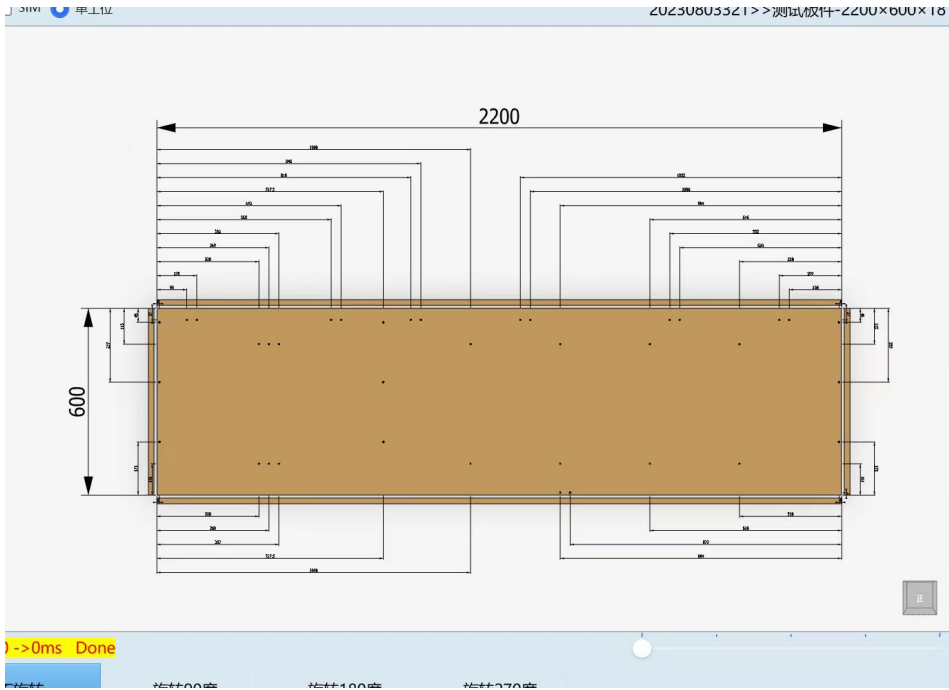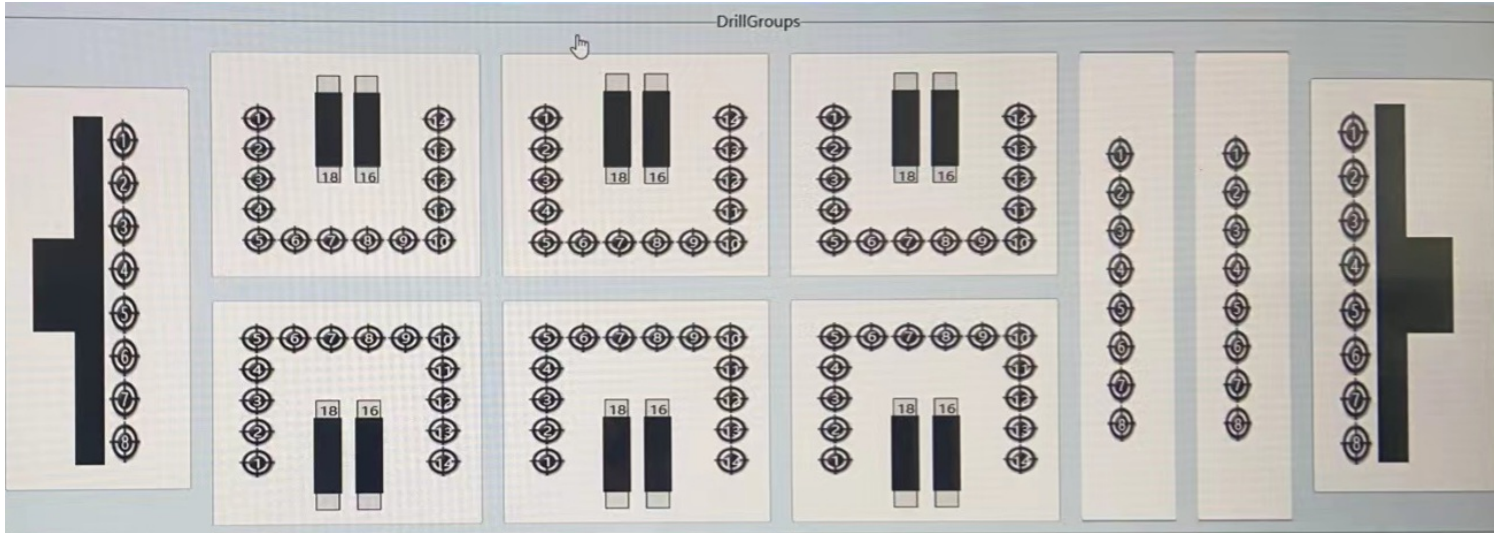

参数设置

正面孔 反面孔 水平孔 正面槽 反面槽 启用破皮

加工文件

文件目录

条码信息

加载进度 100 %

超大文件

加工文件 排孔方案 目录文件 三维推演 SysLog

- 第8次加工 (4个孔)
 - C2 -T4 ->Φ6 (727,5,45) Tg=> 0 Dp118mm
 - C1 -T4 ->Φ6 (727,5,429) Tg=> 0 Dp118mm
 - B2 -T6 ->Φ5 (328,115) Tg=> 0 Dp112.5mm
 - B1 -T6 ->Φ5 (328,499) Tg=> 0 Dp112.5mm
- 第9次加工 (2个孔)
 - C2 -T4 ->Φ6 (727,5,237) Tg=> 0 Dp118mm
 - B2 -T6 ->Φ5 (96,37) Tg=> 0 Dp112.5mm
- 第10次加工 (2个孔)
 - C2 -T6 ->Φ5 (560,37) Tg=> 0 Dp112.5mm
 - B2 -T4 ->Φ6 (8,237) Tg=> 0 Dp118mm



