



S1 LANTERN SURVEY SHEET

THE NEXT GENERATION OF ALUMINIUM LANTERN

secure | sustainable | stylish

Performance through innovation

Levo Systems | Head Office - 54 College Road, Birmingham B44 8BS |
T: 0121 405 0606



LEVO

For a better home.

DELIVERING NATIONWIDE!

TO ORDER OR REQUEST A QUOTE FOR AN S1 ALUMINIUM LANTERN ROOF PLEASE FILL IN THIS FORM














AND EMAIL BACK TO

SALES@LEVOSYSTEMS.CO.UK

DIMENSIONS (measure to the outside of the upstand)

LENGTH (MM) **WIDTH (MM)**

STYLES MARKED WITH AN * CAN INCORPORATE AN OPTIONAL SHEERVENT IF REQUIRED - MARK AN 'X' IN EACH POSITION FOR SHEERVENT PLACEMENT

<p>L W min 600 x 600 max 2400 x 2400</p>  <p>Style 1 <input type="checkbox"/></p>	<p>min 2000 x 1800 max 4000 x 3200</p>  <p>Style 11 <input type="checkbox"/></p>
<p>min 800 x 600 max 3000 x 2400</p>  <p>Style 2 <input type="checkbox"/></p>	<p>min 3000 x 1800 max 6000 x 3200</p>  <p>Style 12* <input type="checkbox"/></p>
<p>min 1200 x 600 max 4000 x 2400</p>  <p>Style 3 <input type="checkbox"/></p>	<p>min 3600 x 1800 max 6000 x 3200</p>  <p>Style 13* <input type="checkbox"/></p>
<p>min 2400 x 600 max 6000 x 2400</p>  <p>Style 4* <input type="checkbox"/></p>	<p>min 1600 x 1400 max 4000 x 3200</p>  <p>Style 6 <input type="checkbox"/></p>
<p>min 3000 x 600 max 6000 x 2400</p>  <p>Style 5* <input type="checkbox"/></p>	<p>min 2400 x 1400 max 6000 x 3200</p>  <p>Style 7* <input type="checkbox"/></p>
<p>min 1800 x 1800 max 3200 x 3200</p>  <p>Style 9 <input type="checkbox"/></p>	<p>min 3000 x 1400 max 6000 x 3200</p>  <p>Style 8* <input type="checkbox"/></p>
<p>min 2000 x 1800 max 3400 x 3200</p>  <p>Style 10 <input type="checkbox"/></p>	

QUOTE / ORDER

JOB DETAILS

NAME

REFERENCE

CONTACT NUMBER

EMAIL

ADDRESS

SITE POSTCODE

PREFERRED DELIVERY DATE

NOTES

YOUR DETAILS

NAME

COMPANY

CONTACT NUMBER

EMAIL

ADDRESS

POSTCODE

SIGNATURE

Select the glass specification of choice.

COLOUR MATT FINISH	EXT.	INT.	GLAZING Band 1	GLAZING Band 2	GLAZING Band 3	GLAZING Band 4
PURE WHITE 9010			Clear / Ecopane U.V.1.2	Ecoclean Blue / Ecopane (U.V.1.2)	Ecoclean Blue / Ecopane U.V.1.0	Ecoclean Bronze / Ecopane U.V.1.0
ANTHRACITE GREY 7016				Ecoclean Sunshield Neutral / Ecopane U.V.1.2	Ecoclean Bronze / Ecopane U.V.1.2	Ecoclean Sunshield Aqua / Ecoplus U.V.1.0
JET BLACK 9005					Ecoclean Sunshield Blue / Ecopane U.V.1.2	Ecoclean Sunshield Blue / Ecoplus U.V.1.0
BESPOKE Subject to minimum order qty. Price on application				Ecoclean Sunshield Neutral / Ecoplus U.V.1.0	Ecoclean Sunshield Aqua / Ecopane U.V.1.2	

The **SBD** upgrade requires **Laminate** glass

SHEERVENT® OPTIONS

SBD Secured by Design Upgrade

NO. OF VENTS

MANUAL ELECTRIC†

NO. OF REMOTES

Only applicable for electric vents.

*SheerVent® is not available unglazed or with SBD.

SENSOR (If required)	
RAIN	RAIN, WIND AND LIGHT

NO. OF POLES

Only applicable for manual vents.

†Please be aware electric SheerVent®s must be connected by a qualified electrician.



LEVO

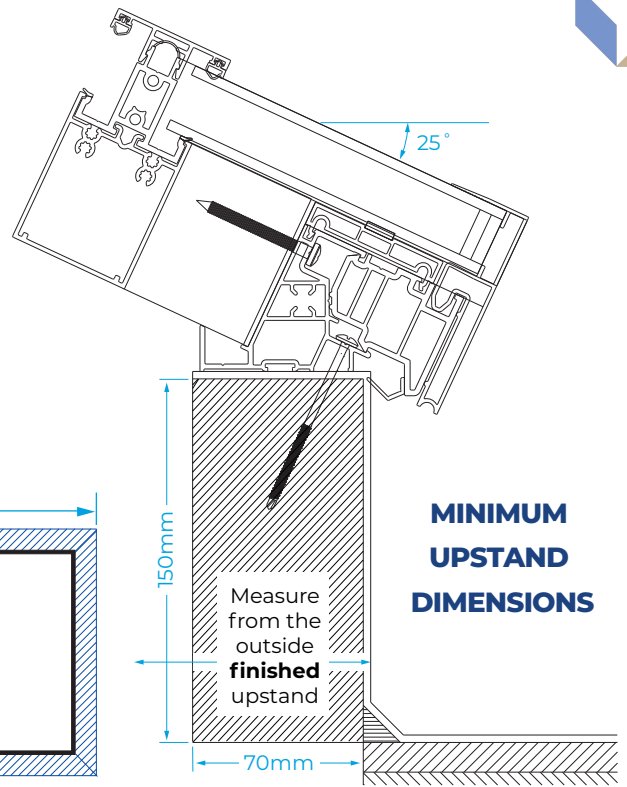
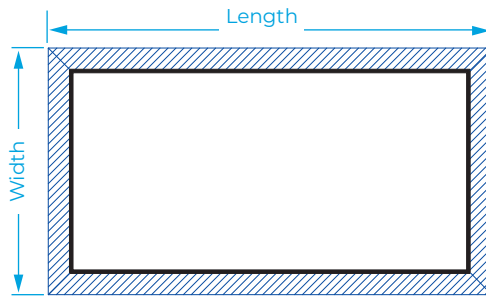
For a better home.



TECHNICAL INFORMATION

- 25° pitch
- 50mm sightlines
Rafter, hip, jack rafters and ridge
- 1.2KN/m² snowload
Covering the whole of the UK

The lantern design assumes that the eaves beam is fully supported along all edges by a structural upstand capable of resisting the full vertical (as well as any lateral spread loads) applied by the lantern roof self-weight plus imposed snow/wind loads.



SHEERVENT® FLUSH INTELLIGENT VENTILATION

With a sleek minimalist design that sits perfectly flush with S1's rafter bars, and with optional powered actuators that can be intelligently automated, Sheerline has reimaged roof vents, **bringing them into the 21st century at last.**



Eliminating the need for muntin bars, SheerVent® offers reliable ventilation without the risk of leaks.



SHEERVENT
MIN. WIDTH: 600MM | MAX. WIDTH: 1000MM
MIN. ROOF WIDTH TO ACCOMMODATE SHEERVENT IS 1000MM

Electrical requirements for powered SheerVent® installations: **Actuator** – this needs wiring to a 24V combined Control Box/Switch (supplied) by a qualified electrician. Additional cabling (not supplied) may be required depending on switch location. **Control Box/Switch** - this requires wiring to a standard 240V electrical supply by a qualified electrician. Cabling not supplied. **Optional Remote** – Requires 1 x CR2430 battery, not supplied. Can control up to 4 vents. **Optional Rain Sensor** – Requires 1 x 9V battery, not supplied. **Optional Wind, Light & Rain Sensor** – Requires power from a plug socket. Both sensors communicate with the Actuator wirelessly and can control up to 4 vents. Neither sensor requires wiring to the Control Box/Switch. All Electrical components are covered by a 12 month guarantee.

