

Bianca Shower Set

SPECIFICATION

WELS RATING OSTAR 7L/MIN

WATERMARK LICENSE WM-060093

TEMPERATURE RATING MIN 1°C-MAX 75°C

PRESSURE RATING MIN 150KPa-MAX 500KPa





CHROME

NR250805cCH

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water.

Do not use cream cleaners or citrus based cleaning products, as they are abrasive.

Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

- 1x shower arm
- 1x shower rail
- 1x shower head
- 1x hand shower (built-in check valve)
- 1x 1.5m PVC hose



Dimensions are nominal measurements only.









Versions: V1




1.Drill a φ 6mm hole at the outlet vertical downward position in the recommended range.




2. Screw the adapter on the outlet, and mount the bracket on theφ6mm hole by expansion plug and tapping screw.




3. Screw the straight tube (with lower body) on diverter body, and then pull on the 2 dressing rings for both the diverter body and lower body.

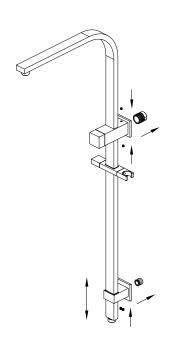

4.Adjust lower body position, and put diverter body and lower body on to the outlet adapter and the bracket, then tighten grub screws by Allen key.

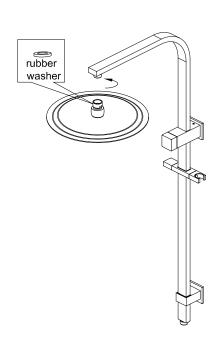

5.Screw on shower head.(note the rubber washer in the shower head.)

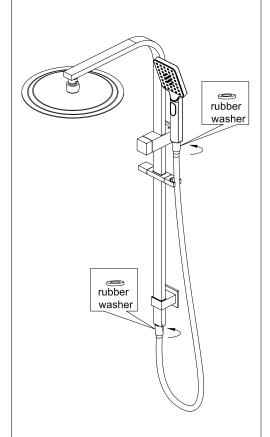

6.Screw shower hose to hand shower and shower rail.(note the rubber washers in the 2 joints of the shower hose).