CATALOGUE

Designer radiators and aluminium towel rails







TOPLOMASHINEX BG EOOD is an european manufacturer and an indisputable symbol of quality and style in the production of aluminum towel rails and designer radiators.

We possess all the certificates needed and meet the European production standards. The main activity of the company is the manufacture of designer radiators for home, the office and larger sites – restaurants, hotels, etc. The radiators are made of aluminum and special glass, which guarantees their premium quality.

All of our products have 10 year warranty.





Designer Aluminium Towel radiators





Oval Delux
































Designer Radiators



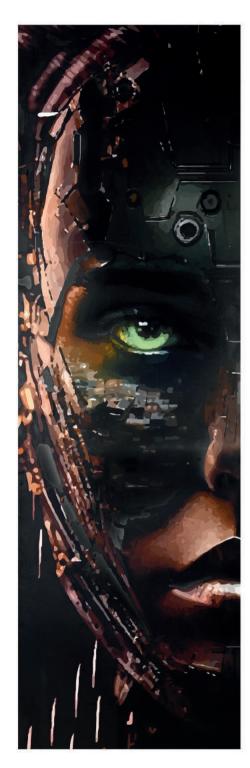








Designer Radiator with ceramic print

Excellent thermal efficiency

Unique design




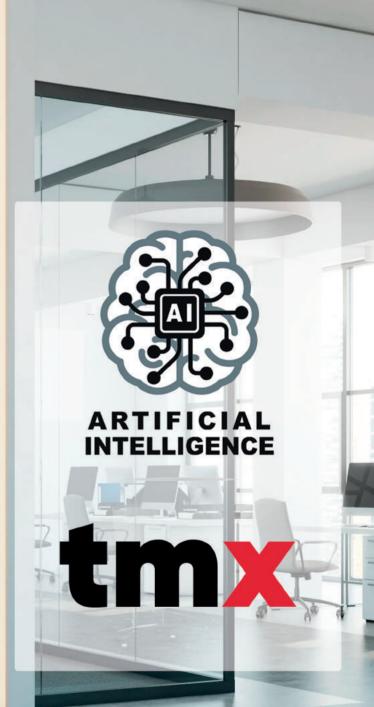







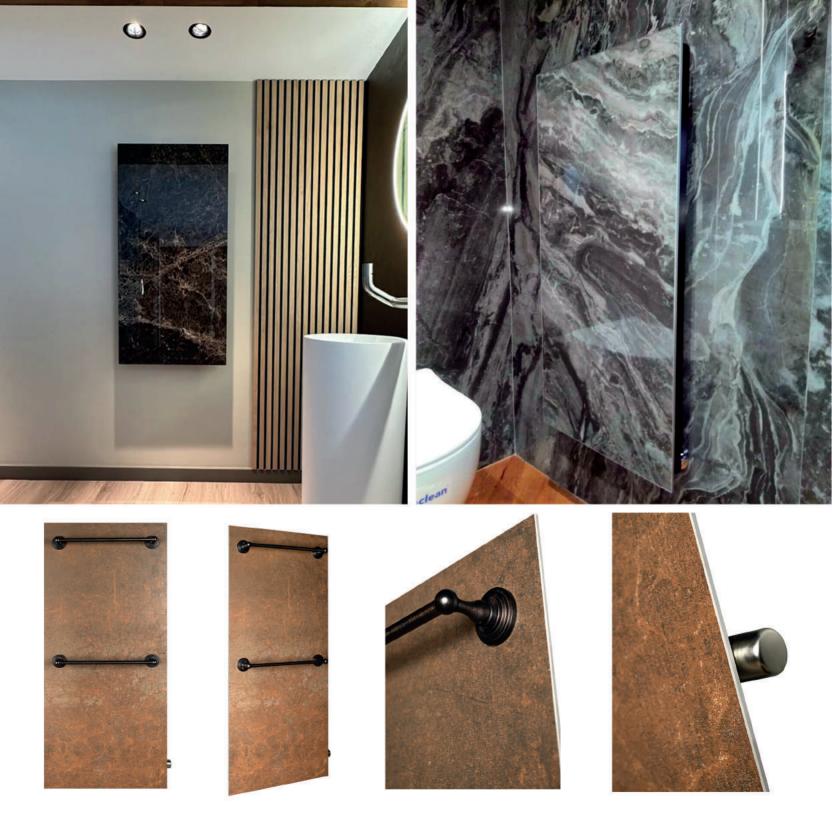



Technical Characteristics

Libra



Height	←→ Width	Central Distance	Powe	Power (W)		Electric heater	Water cap.	Weight
[mm]	[mm]	[mm]	ΔT 50°C	ΔT 30°C	n	Watt	Litres	Kg
1000	466	400	385	184	1.338	300	2,5	2,6
1320	466	400	482	255	1.249	300	2,8	3.2
1640	466	400	630	334	1.243	600	3,3	4.1



Connections

4x1/2" inner carving



Tested on 15 bar pressure



Working pressure 10 bar



Max. working temperature 90 °C

Electric heater

Each radiator manufactured by tmx can be equipped with an electric heater

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator

Optional Accessories

Dryer Split



Dryer Scala



Hanger





Oval Delux



Height	←→ Width	Central Distance	Power (W)		Temperature exponent	Electric heater	Water cap.	Weight
[mm]	[mm]	[mm]	ΔT 50°C	ΔT 30°C	n	Watt	Litres	Kg
1000	466	400	304	163	1.217	300	2,5	2,6
1320	466	400	445	234	1.258	300	2,8	3.2
1640	466	400	561	294	1.264	600	3,3	4.1



Connections

4x1/2" inner carving



Tested on 15 bar pressure



Working pressure 10 bar



Max. working temperature 90 °C

Electric heater

Each radiator manufactured by tmx can be equipped with an electric heater

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator



Dryer Split



Dryer Scala







Fusion



Height	←→ Width	Central Distance	Powe	Power (W)		Electric heater	Water cap.	Weight
[mm]	[mm]	[mm]	ΔT 50°C	ΔT 30°C	n	Watt	Litres	Kg
1000	466	400	438	230	1,334	300	2,8	2,8
1500	466	400	550	370	1,289	600	3,2	3,9



Connections

4x1/2" inner carving



Tested on 15 bar pressure



Working pressure 10 bar



Max. working temperature 90 °C

Electric heater

Each radiator manufactured by tmx can be equipped with an electric heater

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator

Optional Accessories

Dryer Split



Dryer Scala



Hanger





Stilo



↑ ↓ Height	←→ Width	Central	Power (W)		Temperature exponent	Electric heater	Water cap.	Weight
[mm]	[mm]	Distance [mm]	Powe ΔT 50°C	ΔT 30°C	n	Watt	Litres	Kg
1800	170	50	355	179	1.863	300	2,6	4.6



Connections

4x1/2" inner carving



Tested on 15 bar pressure



Working pressure 10 bar



Max. working temperature 90 °C

Electric heater

Each radiator manufactured by tmx can be equipped with an electric heater

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator



Dryer Scala





Oval V



↑ ↓ Height	←→ Width	Central Distance	Power (W)		Temperature exponent	Electric heater	Water cap.	Weight
[mm]	[mm]	[mm]	ΔT 50°C	ΔT 30°C	n	Watt	Litres	Kg
1750	200	290	384	198	1.242	N/A	2.1	3.2



Connections

4x1/2" inner carving



Tested on 15 bar pressure



Working pressure 10 bar



Max. working temperature 90 °C

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator

Optional Accessories

Dryer Scala



HANGER





Classic



Height	←→ Width	Central Distance	Power (W)		Temperature exponent	Electric heater	Water cap.	Weight
[mm]	[mm]	[mm]	ΔT 50°C	ΔT 30°C	n	Watt	Litres	Kg
700	382	350	360	193	1.223	300	2.1	2.2
900	432	400	512	254	1.261	300	2.6	2.9
1200	432	400	690	344	1.243	600	3.7	4
1400	432	400	934	463	1.262	600	4.6	4.6



Connections

4x1/2" inner carving



Tested on 15 bar pressure



Working pressure 10 bar



Max. working temperature 90 °C

Electric heater

Each radiator manufactured by tmx can be equipped with an electric heater

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator





Glass



Height	←→ Width	Central Distance	Powe	er (W)	Temperature exponent	Electric heater	Water cap.	Weight
[mm]	[mm]	[mm]	ΔT 50 C°	ΔT 30	n	Watt	Litres	Kg
1200	600	400	391	184	1.214	300	3.2	19.2
1500	600	400	668	383	1.182	600	6.7	22.9
1800	600	500	844	432	1.243	600	7.2	26.3
2000	800	600	1020	500	1.223	600	7.5	29
2000	1000	800	1222	590	1.262	600	8.9	35.6





15 bar Tested on 15 bar pressure



Working pressure 10 bar



Max. working temperature 90 °C tmx offers custom sizes on designer radiators to fit every client need

Electric heater

Each radiator manufactured by tmx can be equipped with an electric heater

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator



Granite



↑ Height	←→ Width	Central Distance	Power (W)		Temperature exponent	Electric heater	Water cap.	Weight
[mm]	[mm]	[mm]	ΔT 50 C°	ΔT 30 C°	n	Watt	Litres	Kg
1200	600	400	391	184	1.214	300	3.2	19.2
1500	600	400	668	383	1.182	600	6.7	22.9
1800	600	500	844	432	1.243	600	7.2	26.3
2000	800	600	1020	500	1.223	600	7.5	29
2000	1000	800	1222	590	1.262	600	8.9	35.6






5 bar Tested on 15 bar pressure



Working pressure 10 bar



tmx offers custom sizes on designer radiators to fit every client need

Electric heater

Each radiator manufactured by tmx can be equipped with an electric heater

The package contains

- -3pcs. of installation mounts
- -tap
- -manual deaereator



