


The Stream Engine.

Personal Hydropower

Owner's Manual

PLEASE READ CAREFULLY

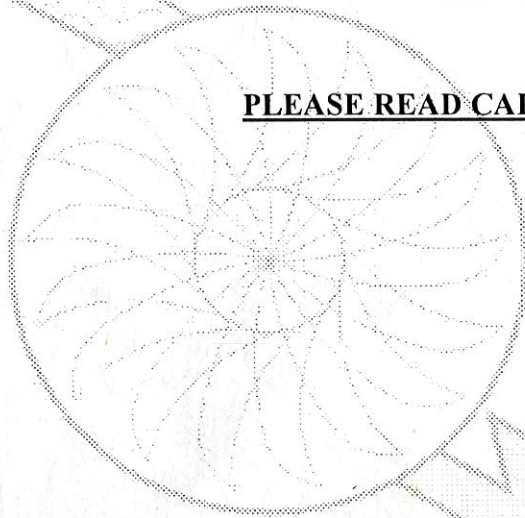

Made in Canada
by

Energy Systems and Design Ltd.

P.O. Box 4557

Sussex, NB

Canada E4E 5L7

Tel: (506) 433-3151

Fax: (506) 433-6151

Email: support@microhydropower.com

Website: www.microhydropower.com

The *Stream Engine* is a Trademark of Energy Systems & Design Ltd.

Congratulations on your purchase of a new *Stream Engine*! With a thorough installation and a little routine maintenance, your Stream Engine will provide you with years of trouble-free operation. This manual will help you to install your Stream Engine as well as assist you in trouble-shooting and problem solving. Of course, you may contact Energy Systems & Design Ltd. if you run into trouble.

May your RE adventures prove successful!

PLEASE READ CAREFULLY

It is very important to keep the alternator rotor from contacting the stator (the stationary part under the rotor). If this occurs, serious damage may result.

Whenever you are operating the machine with a small air gap (distance between alternator rotor and stator) you should check the gap whenever an adjustment is made!

Do this by inserting a business card (0.010" or 0.25mm thick) in the gap when the rotor is stationary. Check all the way around the rotor. This is also a way to check for bearing wear on a monthly basis. If you **cannot** insert the card into the gap, either all or in part, it is necessary to adjust the rotor upward (see *Output Adjustment* in this manual).

When making air gap adjustments, make sure the larger bolt is tightened (clockwise) against the shaft and the smaller bolt is also tightened (clockwise); so as to lock both parts in place.

Table of Contents

| | |
|---|------------|
| 1. Introduction..... | 3 |
| 2. Site Evaluation | 3 |
| 3. Head Measurement..... | 3 |
| 4. Flow Measurement..... | 4 |
| 5. Intake, Pipeline & Tailrace | 5 |
| 6. Batteries, Inverters & Controllers | 7 |
| 7. Wiring and Load Center | 8 |
| 8. Design Example | 8 |
| 9. Output Adjustment | 10 |
| 10. High Voltage Models | 11 |
| 11. <i>Nozzle flow chart</i> | 11 |
| 12. Bearings, Service and Assembly | 12 |
| 13. <i>Copper Wire Resistance Chart</i> | 12 |
| 14. <i>Pipe Friction Head Loss Charts</i> | 13,14 |
| 15. Wiring Diagrams..... | 16 |
| 16. Wiring Schemes | 17 |
| 17. The New Universal Nozzle..... | 17 |
| 18. Current Measurement Technique..... | 17 |
| 19. Installation Diagram | Rear Cover |

INTRODUCTION

This manual describes **The Stream Engine**, which is manufactured by Energy Systems and Design Ltd. The installer must have some knowledge of plumbing and electrical systems, and the user of the system should also. These machines are small, but can generate some very high voltages. Even 12-volt machines can produce high voltages under certain conditions. Practice all due safety. Electricity cannot be seen and can be lethal.

It is important to consult with local officials before conducting any watercourse alteration. ES&D advises following all local laws and ordinances regarding watercourses.

Electricity is produced from the potential energy in moving water from a high point to a lower one. This distance is called "head" and is measured in units of distance (feet, meters) or in units of pressure (pounds per square inch, kilo-Pascals). "Flow" is measured in units of volume (gallons per minute - gpm, or liters per second - l/s), and is the second portion of the power equation. The power available is related to the head and the flow.

The Stream Engine is designed to operate over a wide range of heads and flows. This is achieved with the use of a Turgo runner, or wheel. Nozzle diameters of 1/8 to 1 inch are available, and up to four nozzles can be used on one machine, to utilize heads as low as four feet and as high as hundreds.

The Stream Engine uses a permanent magnet type alternator. This design eliminates the need for brushes and the maintenance that accompany them while increasing efficiency. The Stream Engine's output can be optimized by simply adjusting the rotor clearance.

SITE EVALUATION

Certain information must be determined concerning your site, in order to use its potential for maximum output. Head and flow must first be determined. Other factors are: pipeline length, transmission distance, and the system voltage. These factors determine how much power can be expected.

Power is generated at a constant rate by the Stream Engine and stored in batteries as direct current (DC). Power is supplied, as needed, by the batteries, which store energy during periods of low consumption for use in periods where consumption exceeds the generation rate. Appliances can be used that operate directly from batteries, or 120 volt alternating current (AC) power can be supplied through an inverter, converting DC to AC power.

Sites may vary, so carefully consider flow and head when choosing yours. Remember, maximum head can be achieved by placing the Stream Engine at as low an elevation as possible, but going too low may cause the machine to become submerged (or washed away!).

HEAD MEASUREMENT



Head may be measured using various techniques. A garden hose or length of pipe can be submerged with one end upstream and the other end downstream. Anchor the upstream end with rocks or have

an assistant hold it; water should flow out the low end, especially if the pipeline is pre-filled. Once water is flowing, raise the downstream end until it stops. Do this slowly since the water tends to oscillate. When the flow has stabilized, measure the distance down to the level of water in the stream with a tape measure. This will give a very accurate measurement of that stream section. Mark the spot and then repeat the procedure until the entire distance is covered.

Another technique is to use a surveyor's transit. This method can also be approximated using a carpenter's level using a measuring stick or a "story pole." This technique is also done in a series of steps to arrive at the overall head. A variation on this method is the use of altimeters. Casio makes a wristwatch with a built-in altimeter.

FLOW MEASUREMENT

The easiest method to measure small flows is to channel the water into a pipe using a temporary dam and to fill a container of known volume. Measuring the time to fill the container enables you to calculate the flow rate.

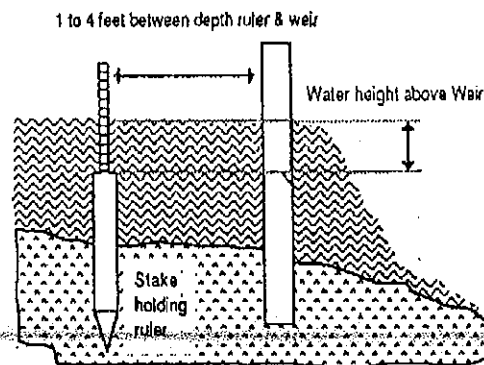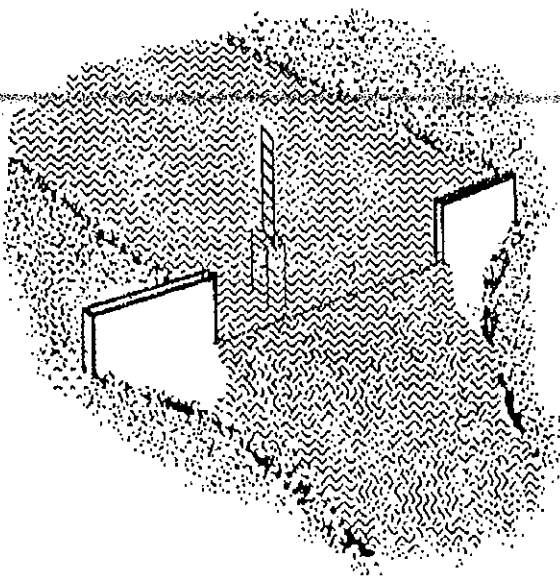

The weir method is more versatile and may prove useful for higher flows. This technique uses a rectangular opening cut in a board or piece of sheet metal set into the brook like a dam. The water is channeled into the weir and the depth is measured from the top of a stake that is level with the edge of the weir and several feet upstream.

Measuring the flow at different times of the year helps you estimate maximum and minimum usable flows. If the water source is seasonally limited, you may have to depend on some other source of power during dry times (solar, wind). Keep in mind that a reasonable amount of water must be left in the stream (Don't take it all, that water supports life forms).

When head and flow are determined, the expected power output can be determined from the

following chart. Keep in mind that chart values represent *generated* output and that actual power delivered to the batteries will be reduced by transmission lines, power converters, and other equipment required by the system. All systems should be carefully planned to maximize power output.

| WEIR MEASUREMENT TABLE | | | | | | | | |
|---|------|------|------|------|-------|-------|-------|-------|
| Table shows water flow in gallons/minute (gpm) that will flow over a weir one inch wide and from 1/8 to 10-7/8 inches deep. | | | | | | | | |
| Inches | | 1/8 | 1/4 | 3/8 | 1/2 | 5/8 | 3/4 | 7/8 |
| 0 | 0.0 | 0.1 | 0.4 | 0.7 | 1.0 | 1.4 | 1.9 | 2.4 |
| 1 | 3.0 | 3.5 | 4.1 | 4.8 | 5.5 | 6.1 | 6.9 | 7.6 |
| 2 | 8.5 | 9.2 | 10.1 | 10.9 | 11.8 | 12.7 | 13.6 | 14.6 |
| 3 | 15.5 | 16.5 | 17.5 | 18.6 | 19.5 | 20.6 | 21.7 | 22.8 |
| 4 | 23.9 | 25.1 | 26.2 | 27.4 | 28.5 | 29.7 | 31.0 | 32.2 |
| 5 | 33.4 | 34.7 | 36.0 | 37.3 | 38.5 | 39.9 | 41.2 | 42.6 |
| 6 | 43.9 | 45.3 | 46.8 | 48.2 | 49.5 | 51.0 | 52.4 | 53.9 |
| 7 | 55.4 | 56.8 | 58.3 | 59.9 | 61.4 | 63.0 | 64.6 | 66.0 |
| 8 | 67.7 | 69.3 | 70.8 | 72.5 | 74.1 | 75.8 | 77.4 | 79.1 |
| 9 | 80.8 | 82.4 | 84.2 | 85.9 | 87.6 | 89.3 | 91.0 | 92.8 |
| 10 | 94.5 | 96.3 | 98.1 | 99.9 | 101.7 | 103.6 | 105.4 | 107.3 |

Example of how to use weir table:
Suppose depth of water above stake is 9 3/8 inches. Find 9 in the left-hand column and 3/8 in the top column. The value where they intersect is 85.9 gpm. That's only for a 1-inch weir, however. You multiply this value by the width of your weir in inches to obtain water flow.

INTAKE, PIPELINE, AND TAILRACE

All hydro systems require a pipeline. Even systems operating directly from a dam require at least a short plumbing run. It is important to use the correct type and size of pipe to minimize restrictions in the flow to the nozzle(s). When possible, pipelines should be buried; this stabilizes the line and prevents animals from chewing it.

At the inlet of the pipe, a filter should be installed. A screened box can be used with the pipe entering one side, or add a section of pipe drilled full of holes wrapped with screen or small holes and used without screen. Make sure that the filter openings are smaller than the smallest nozzle used.

The intake must be above the streambed so as not to suck in silt and should be deep enough so as not to suck in air. The intake structure should be placed to one side of the main flow of the stream so that the force of the flowing water and its debris bypasses it. Routinely clean the intake of any leaves or other debris.

If the whole pipeline doesn't run continuously downhill, at least the first section should, so the water can begin flowing. A bypass valve may be necessary. This should be installed at a low point in the pipe.


For pipelines running over dams, the downstream side may be filled by hand. Once filled, the stop valve at the turbine can be opened to start the flow. If full pressure is not developed, a hand-powered vacuum pump can be used to remove air trapped at the high point.

At the turbine end of the pipeline a bypass valve may be necessary to allow water to run through the pipe without affecting the turbine, purging the line of air or increasing flow to prevent freezing.

A stop valve should be installed upstream of the nozzle. A pressure gauge should be installed upstream of the stop valve so both the static head (no water flowing) and the dynamic head (water flowing) can be read. 6

The stop valve on a pipeline should always be closed slowly to prevent water hammer (the column of water in the pipe coming to an abrupt stop). This can easily destroy your pipeline and for this reason, you may wish to install a pressure relief valve just upstream of the stop valve. This can also occur if debris clogs the nozzle.

Nozzles can be installed or changed by removing the nozzle by unscrewing its four nuts using a 11 mm (7/16") wrench. The use of flexible pipe makes it easier to remove the plumbing from the nozzles.

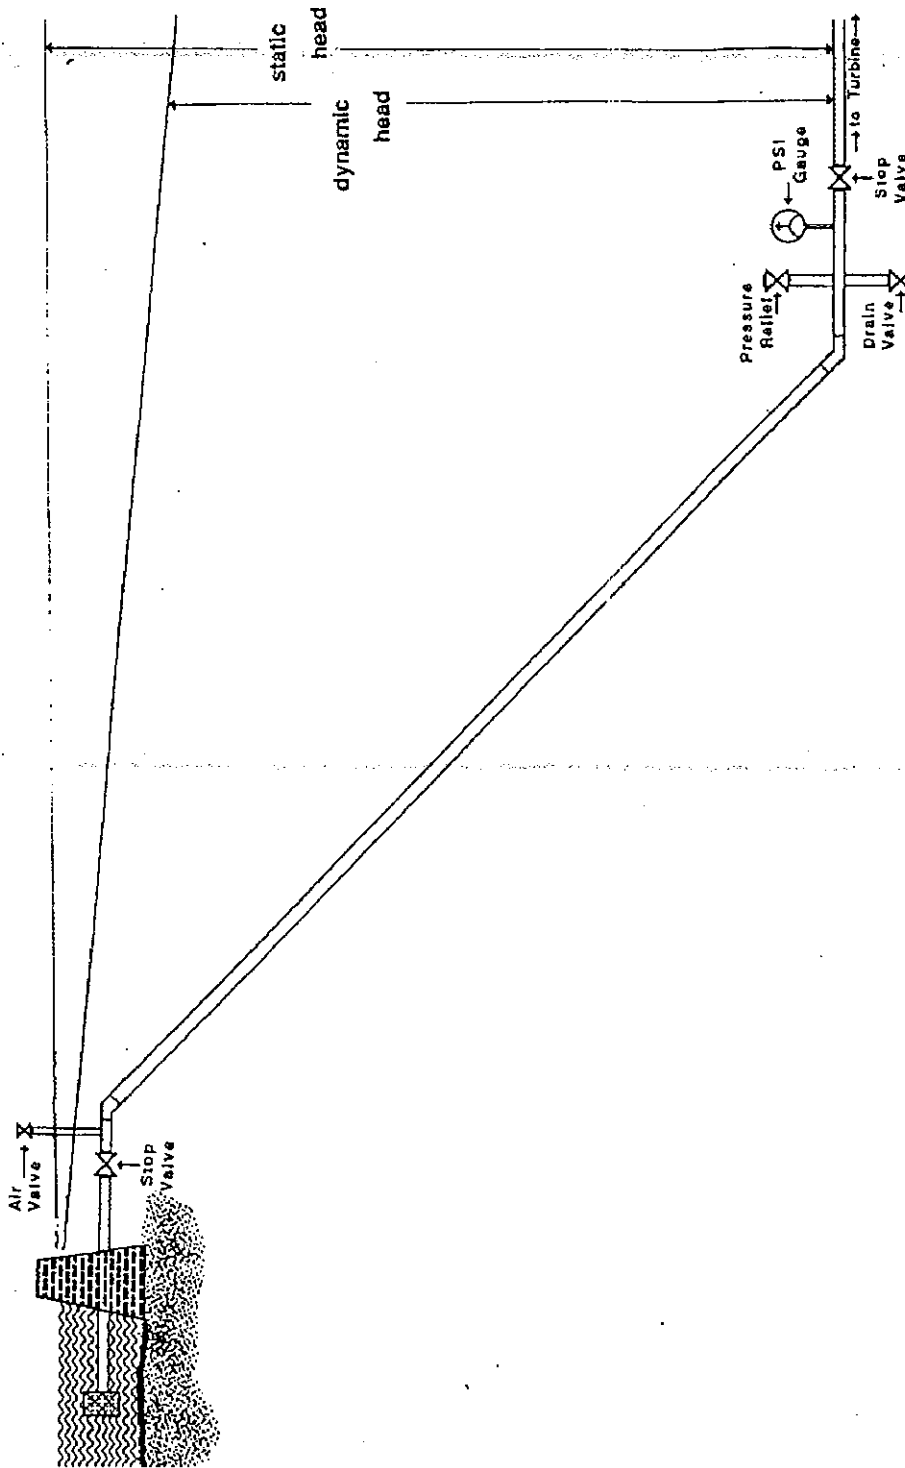

The turbine housing can be mounted on two boards to suspend it above the stream. It is recommended to have the Stream Engine in a small enclosure or under some cover to keep it dry and provide a place for auxiliary equipment.

Mounting the machine in concrete is also possible (you may wish to try a temporary wood mounting first). The opening under the housing to catch the water should be at least the size of the turbine housing opening, and preferably a little larger. Make certain the tailrace (exit channel) provides enough flow for the exiting water. The housing opening is 9-1/2 inches square, the bolt holes are on an 11-inch square, and the housing is 12 inches square.

In cold climates, it may be necessary to build a "trap" into the exit. This prevents outside air from entering the housing and causing freeze-ups.

BATTERIES, INVERTERS & CONTROLLERS

System Voltage

A small system with a short transmission distance is usually designed to operate at 12 volts. Larger systems can also be 12 volts, but if higher power is desired or the transmission distance is long, then a system of 24 volts or higher may be preferable. This is especially true if all loads are inverter-powered. In a 12-volt system operating at a low power level, it may be advantageous to operate all loads directly from batteries. Many 12-volt appliances and small inverters are available. In 24-volt systems, it may also be preferable to operate the loads directly (although not as many appliances are available).

In higher power systems, it is usually better to use an inverter to convert battery voltage to regular 120 VAC power. This has been made feasible with the advent of reliable high power inverters. Thousands of home power systems are in operation with only AC loads.

Sizing Battery Capacity

A typical hydro system should have about two days of battery storage capacity. This will generally keep lead-acid cells operating in the middle of their charge range where they are the most efficient and long-lived. Alkaline batteries like the nickel-iron and the nickel-cadmium types can have a lower capacity since they can be more fully discharged without harm.

Batteries should be located outside of living space, or adequate ventilation should be provided, as a rising charge level tends to produce both hydrogen gas and corrosive fumes. Also, the water consumption increases; distilled water should be used to maintain the water level.

Charge Control

A hydro system requires that a load be present so that the power has somewhere to go. Otherwise, system voltage can rise to very high levels. This situation provides an opportunity to do something with the excess power (a dump load can be used for water heating).

As the batteries become fully charged, their voltage rises. At some point, the charging process should stop and the power be diverted to the dump load (there is a fair bit of guesswork involved here). The voltage set-point should be about 13.5 to 14.5 for a 12-volt system depending on the charge rate. The higher the charge rate, the higher the voltage can go. If batteries are often in a state of charge, the voltage limit should be on the low end of the range.

Some examples of good charge controllers are the TRACE C-35, C-40 and the ENERMAXER. Both switch power to a dump load when their set point is reached. The ENERMAXER has one set point and uses solid state switches to dump the power gradually at the one voltage. Dump loads are usually resistive, such as heaters, but can be anything that is compatible with the system.

A voltmeter or a watt-hour meter can be used to monitor battery charge level. Battery voltage is roughly a function of the charge level, and varies according to the load level and charge rate. As you gain experience, the battery voltage can be used to assess the charge level more accurately.

WIRING AND LOAD CENTER

Every system requires some wiring to connect the various components. Load centers are available as a complete package that easily facilitates the connection of loads and power source(s). All circuits in the system should use wire of adequate size and have fuses or breakers of sufficient capacity to carry the expected load current. The Stream Engine must be fused since it can suffer from a short or similar fault just like anything else in the system.

Inside the junction box on the side of the machine are two terminal blocks for the battery wiring. The negative terminal is bolted to the box and the positive terminal is bolted to the plastic plate. Your transmission wire ends are inserted into these two connectors (after being stripped of insulation) and then tightened. Make sure that the battery wiring is correctly connected or the rectifier will be destroyed. Do not operate the machine without being connected to the batteries as very high voltages may be generated.

The multi-meter connected to the shunt terminals (see *new current measurement technique, pg. 17*) will measure current output and is comparable to the speedometer of a car. A voltmeter connected to the batteries will roughly indicate the charge level, as described in Charge Level above, and is comparable to the gas gauge.

DESIGN EXAMPLE

This example shows how to proceed with a complete installation. The parameters of the example site are:

- 120 feet of head over a distance of 1000 feet
- a flow of 30 gpm (most of the time)
- 100 feet distance from the house to the hydro machine
- 12 volt system

The first thing we do is determine the pipeline size. Although maximum power is produced from a given size pipe when the flow loss is 1/3 of the static head, more power can be obtained from the same flow with a larger pipe, which has lower losses. Therefore, pipe size must be optimized based on economics. As head decreases, efficiency of the system decreases, and it is important to keep the head losses low.

The pipe flow charts show us that two-inch diameter polyethylene pipe has a head loss of 1.77 feet⁹ of head per 100 feet of pipe at a flow rate of 30 gpm. This is 17.7 feet of loss for 1000 feet of pipe.

Using two-inch PVC gives us a loss of 1.17 feet of head per 100 feet of pipe or 11.7 feet for 1000 feet.

Polyethylene comes in continuous coils because it is flexible (and more freeze resistant). PVC comes in shorter lengths and has to be glued together or purchased with gaskets (for larger sizes). Let's say we select polyethylene.

The maximum output occurs with a flow of about 45 gpm since that gives us a head loss of 3.75 feet per 100 feet of pipe, or 37.5 feet of loss for our 1000 feet of pipe. This is 37.5' loss/120' head = 31% loss.

A flow of 30 gpm gives a net head of 102.3 feet (120' - 17.7'). The losses caused by the various pipe fittings and intake screen will further decrease the dynamic head, so 100 feet is a good working figure for the net head.

At this head and flow condition, the output of the machine is equal to about 300 watts.

Since we require 12 volts and the transmission distance is short, we can generate and transmit 12 volts using the Stream Engine. This Stream Engine could also be used for higher voltages like 24 and 48, and power could be transmitted longer distances.

Looking at the nozzle flow chart, we see that a 3/8" nozzle will produce a flow of 27.6 gpm at a 100' head. This is very close to the design point but will produce slightly less output than if we had exactly 30 gpm. A 7/16" nozzle would produce slightly greater flow and output. We need to go 100' with 300 watts at our site. This will be about 20 amps at 15 volts at the generator. Note that there will be some voltage drop in the line and 12-volt batteries require somewhat higher voltages than nominal to become charged. So the 20 amps must pass through 200' of wire for the round trip. Resistance losses should be kept as low as economics permit, just like the pipeline losses.

Let's say we wish to have around a 10% loss. This is 30 watts out of the original 300. The formula for resistive loss is $I^2R = \text{watts}$ when $I = \text{Intensity (current in amps)}$ and $R = \text{Resistance (in ohms)}$.

$$\begin{aligned}(20 \text{ amps}) \times (20 \text{ amps}) \times R \text{ (ohms)} &= 30 \text{ watts} \\ 400 \text{ amps} \times R \text{ (ohms)} &= 30 \text{ watts} \\ R &= 30 \text{ watts}/400 \text{ amps} \\ R &= 0.075 \text{ ohms}\end{aligned}$$

This is the wire resistance that will produce a 10% loss. The wire loss chart shows loss per 1000', so:

$$1000'/200' \times 0.075 \text{ ohms} = 0.375 \text{ ohms per } 1000'.$$

The chart shows 6 ga. Wire has a resistance of 0.40 ohms per 1000', so:

$$\begin{aligned}200'/1000' \times 0.40 \text{ ohms} &= 0.08 \text{ ohms. This is close to the desired level.} \\ 20 \text{ amps} \times 20 \text{ amps} \times 0.08 \text{ ohms} &= 32 \text{ watts of loss.}\end{aligned}$$

Increasing the wire size further reduces the losses. Voltage drop in the wire is equal to:

$$IR = 20 \text{ amps} \times 0.08 \text{ ohms} = 1.6 \text{ volts}$$

So if the battery voltage is 13.4 the generator will be operating at 15.0 volts. Keep in mind that it is always the batteries that determine the system voltage. That is, all voltages in the system rise and fall according to the battery's state of charge.

At the site, we would be generating 20 amps continuously. If we use lead acid batteries and wish to have two days of storage capacity, then:

$$20 \text{ amps} \times 24 \text{ hrs} \times 2 \text{ days} = 960 \text{ amp. Hrs. Capacity}$$

We would probably use an inverter and load controller with the system. The diagram for such a system would look like this:

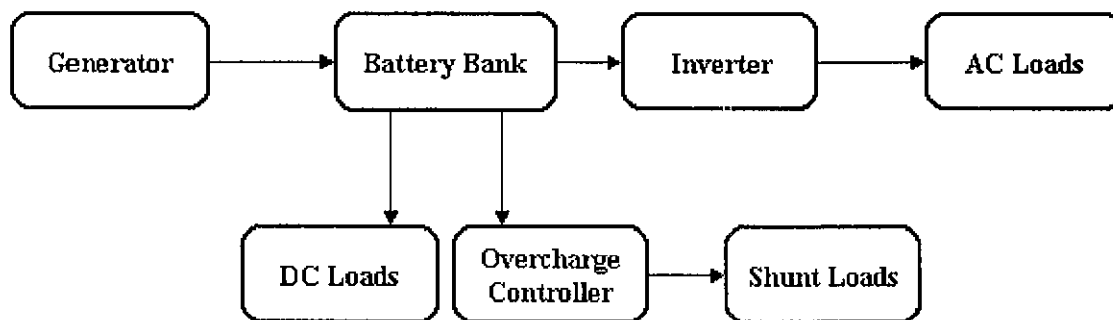


Diagram of a typical battery-based system:

OUTPUT ADJUSTMENT

For the machine to produce the highest output, the rotor height should be adjusted. This involves raising and lowering the rotor to increase the magnetic flux level. This is necessary to match the output of the turbine with that of the generator.

After the machine is installed, perform an initial run to establish a power output level. This can be determined using an ammeter to measure current or a digital meter to measure voltage. A good idea is to keep a logbook to note any output changes in relation to settings. After everything is hooked up, start the machine by opening the stop valve. Run it long enough for the output level to stabilize and note the current (or voltage). Then shut the stop valve.

The machine comes with the rotor set very close to the stator (the stationary part of the machine). To increase this distance and reduce the magnetic flux level, you must turn the larger bolt 19mm (3/4") head on the top of the rotor while holding it stationary. This is done by inserting the 1/4" pin supplied in one of the holes in the edge of the rotor. Then the smaller 11mm(7/16") head bolt is loosened. Now you can turn the larger bolt, which will force the rotor up. Each full turn of the bolt will move the rotor vertically 1.25 mm (0.050"). If raising the rotor causes the current (or the voltage) to increase, then continue to do so until there is no longer an increase. If a point is reached where a decrease occurs, then the rotor should be lowered. This is done by loosening the larger bolt and then tightening the smaller one. Turning the smaller bolt causes the rotor to move vertically the same distance per turn as the larger bolt does. When you have found the best position (no increase in current or voltage), make sure the larger bolt is turned until it is tight. Now the smaller bolt should be tightened securely to lock everything in place. No further adjustments should be required unless nozzle sizes are changed.

When adjusting the rotor downward, it may reach the point where it will contact the stator. If this occurs, always adjust it upwards by at least a 1/4 turn of the larger bolt. Operating the machine with the rotor closer than this may damage the machine.

**** Always turn the rotor by hand before starting the machine to check for rubbing**.**
Remove the pin in the rotor edge before starting the machine.

Optimum nozzle size can be found using a similar technique.

Energy Systems and Design has introduced a new type of nozzle for its hydro-electric generators. This makes it possible to create any size nozzle jet that might be required by simply cutting the nozzle to the appropriate length. Cutting can be done with a hacksaw, or any other fine toothed saw. The end of the nozzle should then be finished with a piece of sandpaper. This is best done by placing the sandpaper on a flat surface and moving the nozzle against it. Markings are on the nozzle to assist in cutting to the correct size. The numbers are in millimeters and correspond to inches as follows:

| | | | | | | | | | | |
|--------|-----|------|-----|------|-----|-----|-----|-----|-----|----|
| mm | 3 | 4.5 | 6 | 8 | 10 | 13 | 16 | 19 | 22 | 25 |
| inches | 1/8 | 3/16 | 1/4 | 5/16 | 3/8 | 1/2 | 5/8 | 3/4 | 7/8 | 1 |

Odd sizes can also be produced. The opening of the nozzle is about 6% larger than the actual jet of water that exits from it. Another possibility is to make the opening larger until the desired flow is obtained. An O-ring is provided in order to seal the face. This prevents water leaks to the outside of the machine.

For the smallest nozzle sizes, the nozzle may have to be installed with the numbered side facing upward, so that the end will not contact the turbine wheel.

| |
|---|
| <p><u>High Voltage models Only</u></p> <p>When operating a Stream Engine using transformers, it will require a different technique in order to optimize the output. This can be done at the turbine by adjusting for maximum voltage rather than maximum current. AC voltage can be measured across any two of the output terminals. These terminals are the same on the terminal board as for low-voltage DC systems. Make rotor air gap adjustments according to the instructions earlier in this manual. An on/off switch is supplied for the incoming AC power. In normal use the switch is usually left on.</p> |
|---|

| Head Feet | Pressure PSI | Nozzle Diameter, inches | | | | | | | | | | | Turbine RPM |
|-----------|--------------|-------------------------|------|------|------|------|------|------|------|------|------|------|-------------|
| | | 1/8 | 3/16 | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 | 5/8 | 3/4 | 7/8 | 1.0 | |
| 5 | 2.2 | | | | | 6.18 | 8.40 | 11.0 | 17.1 | 24.7 | 33.6 | 43.9 | 460 |
| 10 | 4.3 | | | 3.88 | 6.05 | 8.75 | 11.6 | 15.6 | 24.2 | 35.0 | 47.6 | 62.1 | 650 |
| 15 | 6.5 | | 2.68 | 4.76 | 7.40 | 10.7 | 14.6 | 19.0 | 29.7 | 42.8 | 58.2 | 76.0 | 800 |
| 20 | 8.7 | 1.37 | 3.09 | 5.49 | 8.56 | 12.4 | 16.8 | 22.0 | 34.3 | 49.4 | 67.3 | 87.8 | 925 |
| 30 | 13.0 | 1.68 | 3.78 | 6.72 | 10.5 | 15.1 | 20.6 | 26.9 | 42.0 | 60.5 | 82.4 | 107 | 1140 |
| 40 | 17.3 | 1.94 | 4.37 | 7.76 | 12.1 | 17.5 | 23.8 | 31.1 | 48.5 | 69.9 | 95.1 | 124 | 1310 |
| 50 | 21.7 | 2.17 | 4.88 | 8.68 | 13.6 | 19.5 | 26.6 | 34.7 | 54.3 | 78.1 | 106 | 139 | 1470 |
| 60 | 26.0 | 2.38 | 5.35 | 9.51 | 14.8 | 21.4 | 29.1 | 38.0 | 59.4 | 85.6 | 117 | 152 | 1600 |
| 80 | 34.6 | 2.75 | 6.18 | 11.0 | 17.1 | 24.7 | 33.6 | 43.9 | 68.6 | 98.8 | 135 | 176 | 1850 |
| 100 | 43.3 | 3.07 | 6.91 | 12.3 | 19.2 | 27.6 | 37.6 | 49.1 | 76.7 | 111 | 150 | 196 | 2070 |
| 120 | 52.0 | 3.36 | 7.56 | 13.4 | 21.0 | 30.3 | 41.2 | 53.8 | 84.1 | 121 | 165 | 215 | 2270 |
| 150 | 65.0 | 3.76 | 8.95 | 15.0 | 23.5 | 33.8 | 46.0 | 60.1 | 93.9 | 135 | 184 | 241 | 2540 |
| 200 | 86.6 | 4.34 | 9.77 | 17.4 | 27.1 | 39.1 | 53.2 | 69.4 | 109 | 156 | 213 | 278 | 2930 |
| 250 | 108 | 4.86 | 10.9 | 19.9 | 30.3 | 43.6 | 59.4 | 77.6 | 121 | 175 | 238 | 311 | 3270 |
| 300 | 130 | 5.32 | 12.0 | 21.3 | 33.2 | 47.8 | 65.1 | 85.1 | 133 | 191 | 261 | 340 | 3591 |
| 400 | 173 | 6.14 | 13.8 | 24.5 | 38.3 | 55.2 | 75.2 | 98.2 | 154 | 221 | 301 | 393 | 4140 |


BEARINGS, SERVICE & ASSEMBLY

In order to remove the generator you must first remove the turbine wheel. The machine's wheel is unscrewed from the shaft by holding the rotor using the 1/4" diameter rod inserted into one of the holes in the edge of the rotor. The turbine wheel is assembled with a washer and then a spacer on top. The shaft is made with standard right hand threads for the turbine wheel so it will unscrew in a counter-clockwise direction when looking at the shaft (with the machine upside down). Then you can remove the four bolts with 4mm (5/32") hex drive.

You should replace bearings as soon as you notice any looseness. If they are too loose, severe damage to both the rotor and the stator can result. This machine uses three 6203 ball bearings with contact seals. On earlier machines these are press fit into the alternator housing and must be installed and removed using a press of adequate capacity and a proper sized mandrel. Presently the bearings in the machine are a loose fit in the housing bore and can be replaced by hand IF there is not too much rust.

To replace bearings:

1. Using the rotor pin to hold the shaft, unthread the runner from the generator shaft.
2. Remove rotor. To remove rotor and shaft raise the rotor as described in *output adjustment* until the magnetic attraction is low enough to separate the rotor/shaft assembly from the housing and stator.
3. Unscrew 4 bolts and washers retaining bearings.
4. With the Stream Engine sitting inverted, using your thumbs, push out the bearings from the sleeve or tap the bearings out. This may require a press in some situations.
5. Clean bearing sleeve and insert new 6203LLU bearings.
6. Reassemble.

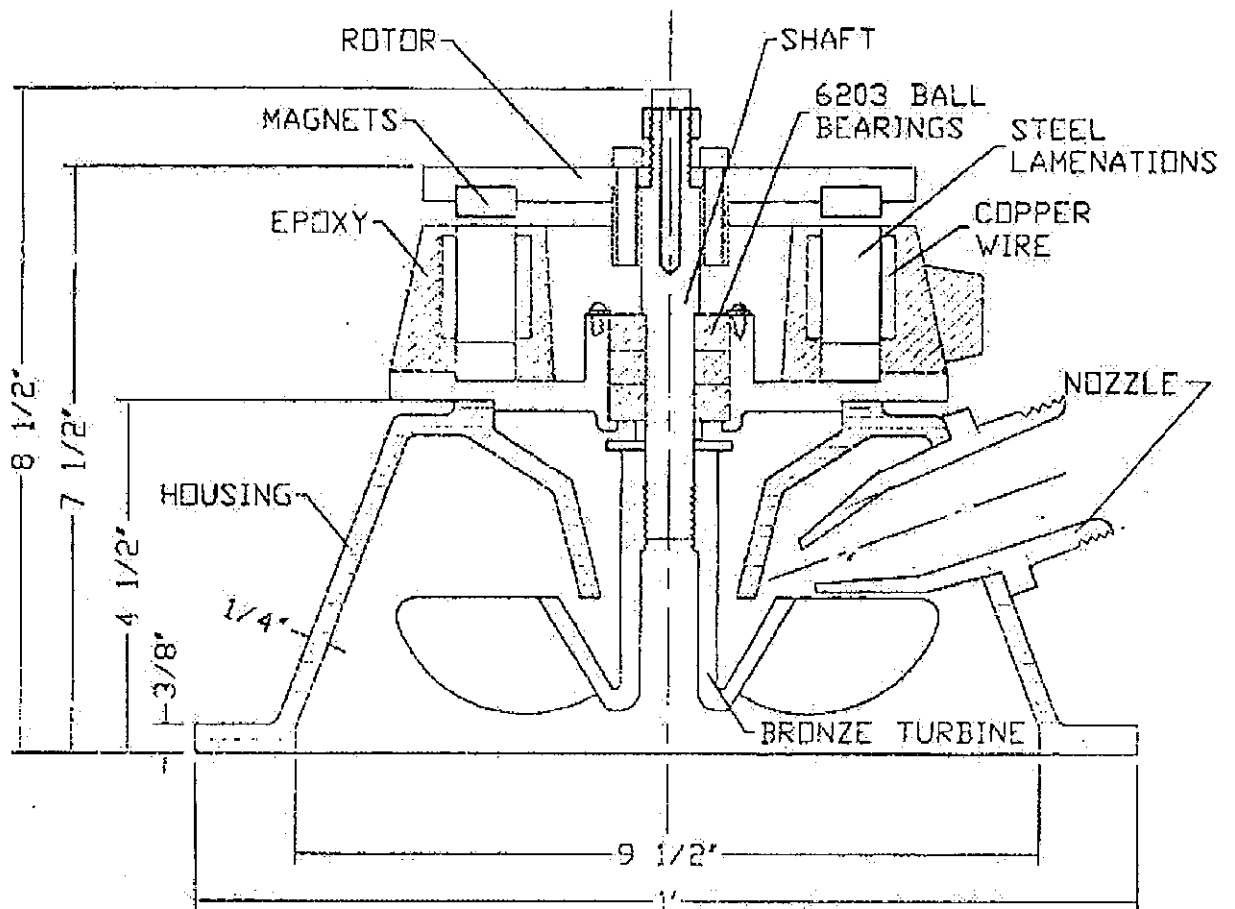

Copper Wire Resistance Chart

| Wire Gauge | Diameter Inches | Ohms per 1000' | Ohms per Mile |
|------------|-----------------|----------------|---------------|
| 0000 | 0.460 | 0.05 | 0.26 |
| 000 | 0.410 | 0.06 | 0.33 |
| 00 | 0.364 | 0.08 | 0.42 |
| 0 | 0.324 | 0.10 | 0.52 |
| 2 | 0.258 | 0.16 | 0.84 |
| 4 | 0.204 | 0.25 | 1.34 |
| 6 | 0.162 | 0.40 | 2.13 |
| 8 | 0.128 | 0.64 | 3.38 |
| 10 | 0.102 | 1.02 | 5.38 |
| 12 | 0.081 | 1.62 | 8.56 |
| 14 | 0.064 | 2.58 | 13.6 |
| 16 | 0.051 | 4.10 | 21.6 |
| 18 | 0.040 | 6.52 | 34.4 |

PIPE FRICTION LOSS - PVC Class 160 PSI Plastic Pipe
 Pressure Loss from Friction in Feet of Head per 100 Feet of Pipe

| Flow US GPM | Pipe Diameter, Inches | | | | | | | | | | |
|-------------|-----------------------|------|------|------|------|------|------|------|------|------|------|
| | 1 | 1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 5 | 6 | 8 | 10 |
| 1 | 0.05 | 0.02 | | | | | | | | | |
| 2 | 0.14 | 0.05 | 0.02 | | | | | | | | |
| 3 | 0.32 | 0.09 | 0.04 | | | | | | | | |
| 4 | 0.53 | 0.16 | 0.09 | 0.02 | | | | | | | |
| 5 | 0.80 | 0.25 | 0.12 | 0.04 | | | | | | | |
| 6 | 1.13 | 0.35 | 0.18 | 0.07 | 0.02 | | | | | | |
| 7 | 1.52 | 0.46 | 0.23 | 0.08 | 0.02 | | | | | | |
| 8 | 1.93 | 0.58 | 0.30 | 0.10 | 0.04 | | | | | | |
| 9 | 2.42 | 0.71 | 0.37 | 0.12 | 0.05 | | | | | | |
| 10 | 2.92 | 0.87 | 0.46 | 0.16 | 0.07 | 0.02 | | | | | |
| 11 | 3.50 | 1.04 | 0.53 | 0.18 | 0.07 | 0.02 | | | | | |
| 12 | 4.09 | 1.22 | 0.64 | 0.20 | 0.09 | 0.02 | | | | | |
| 14 | 5.45 | 1.63 | 0.85 | 0.28 | 0.12 | 0.04 | | | | | |
| 16 | 7.00 | 2.09 | 1.08 | 0.37 | 0.14 | 0.04 | | | | | |
| 18 | 8.69 | 2.60 | 1.33 | 0.46 | 0.18 | 0.07 | | | | | |
| 20 | 10.6 | 3.15 | 1.63 | 0.55 | 0.21 | 0.09 | 0.02 | | | | |
| 22 | 12.6 | 3.77 | 1.96 | 0.67 | 0.25 | 0.10 | 0.02 | | | | |
| 24 | 14.8 | 4.42 | 2.32 | 0.78 | 0.30 | 0.12 | 0.04 | | | | |
| 26 | 17.2 | 5.13 | 2.65 | 0.90 | 0.35 | 0.14 | 0.05 | | | | |
| 28 | 19.7 | 5.89 | 3.04 | 1.04 | 0.41 | 0.16 | 0.05 | | | | |
| 30 | 22.4 | 6.70 | 3.45 | 1.17 | 0.43 | 0.18 | 0.05 | | | | |
| 35 | | 8.90 | 4.64 | 1.56 | 0.62 | 0.23 | 0.07 | | | | |
| 40 | | 11.4 | 5.89 | 1.98 | 0.78 | 0.30 | 0.09 | 0.02 | | | |
| 45 | | 14.2 | 7.34 | 2.48 | 0.97 | 0.37 | 0.12 | 0.04 | | | |
| 50 | | 17.2 | 8.92 | 3.01 | 1.20 | 0.46 | 0.14 | 0.04 | | | |
| 55 | | 20.5 | 10.6 | 3.59 | 1.43 | 0.55 | 0.16 | 0.05 | | | |
| 60 | | 24.1 | 12.5 | 4.21 | 1.66 | 0.64 | 0.18 | 0.07 | 0.02 | | |
| 70 | | | 16.6 | 5.61 | 2.21 | 0.85 | 0.25 | 0.09 | 0.03 | | |
| 80 | | | 21.3 | 7.18 | 2.83 | 1.08 | 0.32 | 0.12 | 0.04 | | |
| 90 | | | | 8.92 | 3.52 | 1.36 | 0.39 | 0.14 | 0.07 | | |
| 100 | | | | 10.9 | 4.28 | 1.66 | 0.48 | 0.18 | 0.07 | 0.02 | |
| 150 | | | | 23.2 | 9.06 | 3.50 | 1.04 | 0.37 | 0.16 | 0.05 | |
| 200 | | | | | 15.5 | 5.96 | 1.75 | 0.62 | 0.28 | 0.07 | 0.02 |
| 250 | | | | | 23.4 | 9.05 | 2.65 | 0.94 | 0.42 | 0.12 | 0.05 |
| 300 | | | | | | 12.6 | 3.73 | 1.34 | 0.58 | 0.16 | 0.05 |
| 350 | | | | | | 16.8 | 4.95 | 1.78 | 0.76 | 0.21 | 0.07 |
| 400 | | | | | | 21.5 | 6.33 | 2.25 | 0.97 | 0.28 | 0.10 |
| 450 | | | | | | | 7.87 | 2.81 | 1.20 | 0.32 | 0.12 |
| 500 | | | | | | | 9.55 | 3.41 | 1.45 | 0.42 | 0.14 |
| 550 | | | | | | | 11.4 | 4.07 | 1.75 | 0.48 | 0.16 |
| 600 | | | | | | | 13.4 | 4.78 | 2.05 | 0.58 | 0.18 |
| 650 | | | | | | | 15.5 | 5.54 | 2.37 | 0.67 | 0.23 |
| 700 | | | | | | | 17.8 | 6.37 | 2.71 | 0.76 | 0.25 |
| 750 | | | | | | | 20.3 | 7.22 | 3.10 | 0.86 | 0.30 |
| 800 | | | | | | | | 8.14 | 3.50 | 0.97 | 0.32 |
| 850 | | | | | | | | 9.11 | 3.89 | 1.08 | 0.37 |
| 900 | | | | | | | | 10.1 | 4.32 | 1.20 | 0.42 |
| 950 | | | | | | | | 10.8 | 4.79 | 1.34 | 0.46 |
| 1000 | | | | | | | | 12.3 | 5.27 | 1.45 | 0.51 |





Stream Engine Output in Watts (Continuous)

| Net Head | | Flow Rate | | | | | | |
|----------|------|--------------------------|--------------|--------------|--------------|---------------|---------------|---------------|
| | | Liters/sec (Gallons/min) | | | | | | |
| | | 0.67 (10) | 1.33 (20) | 2.50 (40) | 5.00 (75) | 6.67 (100) | 7.50 (112) | 9.50 (150) |
| Meters | Feet | | | | | | | |
| 3 | 10 | - | 20 | 50 | 90 | 120 | 130 | 150 |
| 6 | 20 | 15 | 40 | 100 | 180 | 230 | 250 | 350 |
| 15 | 49 | 45 | 110 | 230 | 450 | 600 | 650 | 800 |
| 30 | 98 | 80 | 200 | 500 | 940 | 1100 | * | * |
| 60 | 197 | 150 | 400 | 900 | 1500 | * | * | * |
| 90 | 295 | 200 | 550 | 1200 | * | * | * | * |
| 120 | 394 | 300 | 700 | 1500 | * | * | * | * |
| 150 | 492 | 400 | 850 | 1900 | * | * | * | * |

* Due to lower efficiency at higher flows, it becomes worthwhile to utilize two Stream Engines.

WIRING DIAGRAMS

These diagrams represent the four possible combinations of output wiring. They are in order of potential. If you find your air gap adjustment to be at a minimum and wish to try for more power, then try using the next higher combination. If you find the air gap is very large, try the next lower one. Note that there is only a small change in potential between #2 to #3.

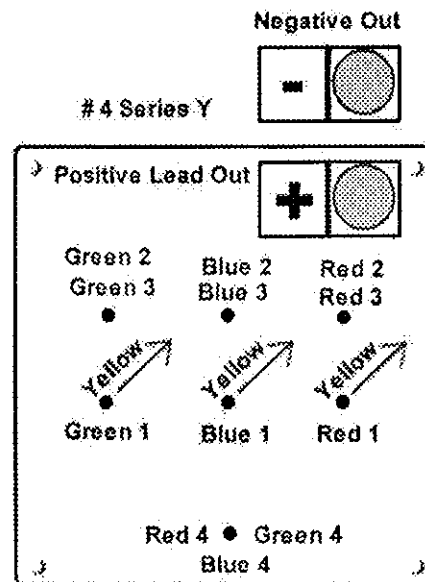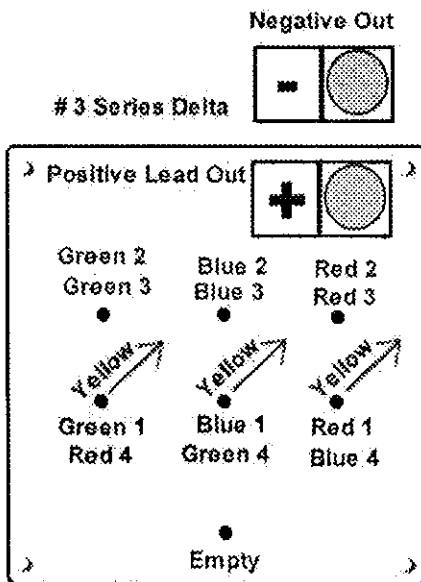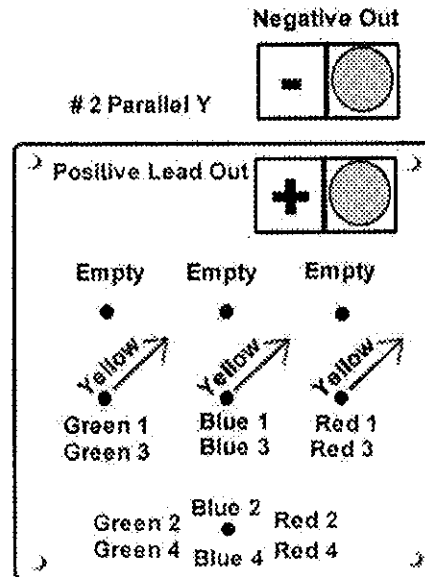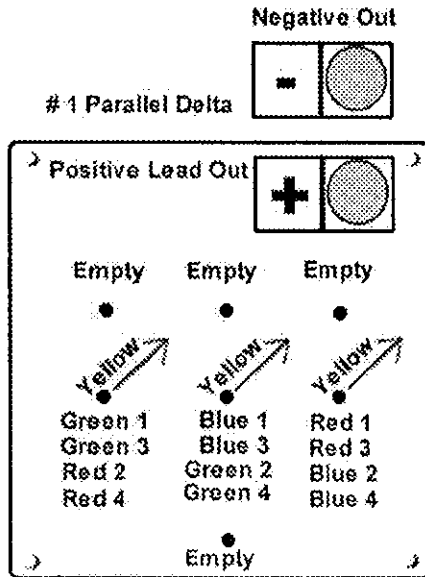

WIRING SCHEMES

| <i>12 VOLTS</i> | <i>24 VOLTS</i> | <i>48 VOLTS</i> |
|------------------------------------|--|--|
| Parallel Delta All Heads | Series Delta <i>up to 60'/18 m</i> | Series Y <i>up to 60'/ 18m</i> |
| | Parallel Delta <i>30'/ 9m and up</i> | Series Delta <i>30'/9m to 250'/75m</i> |
| | | Parallel Delta <i>140'/43m and up</i> |

Note: At a given site, more than one scheme may work. But one will work best.

Parallel wye configuration is not mentioned because it is very similar to series delta. It differs by about 15 %. If you have a site where series delta is used and you think the output could be greater, try it. Remember to adjust the rotor for highest output when changing the wiring.

NEW CURRENT MEASUREMENT TECHNIQUE

Previously, all Stream Engines were equipped with analogue ammeters. Now, a built-in shunt (precision resistance) is installed in the junction box which allows the current to be measured digitally. This is done with the supplied DMM (digital multi meter). To measure the current produced by the generator, set the DMM scale to "DC mili-volts" or "200 m" at the nine o'clock position. Do not use the amps scale. Plug the negative in bottom hole, and positive in middle hole. Plug the leads into their corresponding color-coded jacks on the shunt in the junction box. This will give current readings from 0.1 amps to 99.9 amps. Of course, the DMM can be used for other tasks with your renewable energy system.