

PhoneStick


Product Specifications

PS-PhoneStick-01/01-051015

The PhoneStick is multifunctional charger that can be directly connected to leadacid battery.

The Phonestick can charge any device that can be charged from a USB standard socket and it also can be used to energize small radio or cassette player with a rated voltage of 4.5 to 6 VDC (3 to 4 Alkaline)

The Charger can supply to maximum of 1000 mA current and is protected for short circuit and overload.

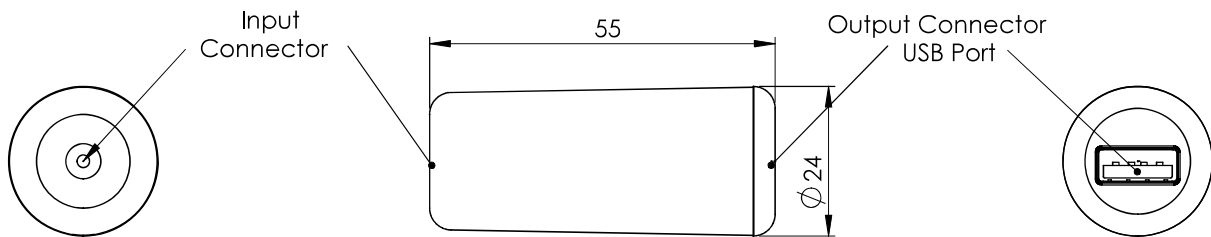

Electrical details

Rated Input Voltage	15 - 25 VDC
Nominal Output Voltage	5 V
Maximum Output Current	1000 mA
Electrical Efficiency	95%
Enclosure Protection Class	IP 22

Mechanical details

Operating Temperature Range	-10 C to + 55 C
Enclosure Material	ABS
Connector Material	Brass str
Product Dimensions (L x Dia.mm)	70 x 22mm
Nett Product Weight	400 gr