

THE NEW GLOBAL POWER FOR ELECTROMAGNETIC COMPATIBILITY.

THE WORLD'S SPEED IS OUR BEAT



RF/Microwave Amplifiers

MILMEGA 'AS' Series Solid State Amplifier Range

Model: AS0860B-200/100 Dual Band Amplifier




- Calibrated Dual Directional Coupler fitted as standard
- ➤ Ethernet, USB and RS232 or GPIB and RS232 included in price
- Unique 5 year parts and labour warranty on all MILMEGA amplifiers.

The AS0860A series of solid state power amplifiers follows the MILMEGA tradition for compact, upgradeable microwave power amplifier solutions with field proven reliability.

Developed to cover the frequency band 0.8- 6.0GHz in two bands (0.8 GHz to 2.0 GHz and 1.8 GHz to 6.0 GHz)

Where the transition from the low band to the high band amplifier is required to take place at a higher frequency, please see either the AS0860 range (0.8 GHz to 2.5 GHz and 1.8 GHz to 6.0 GHz) or AS0860A range (0.8 GHz to 2.7 GHz and 1.8 GHz to 6.0 GHz)

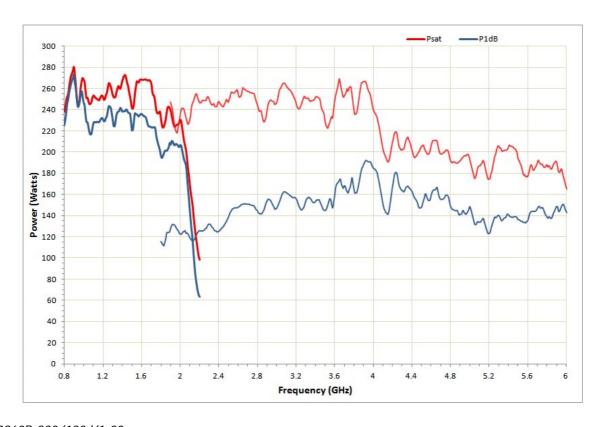

DS-AS0860B-200/100 V1.00

Amplifier Specification

Band Dependant Parameters	0.8 to 2.0 GHz	1.8 to 6.0GHz	
Psat (min)	210 W	120 W	
P1dB (min)	190 W	91W	
Gain (min)	53dB	47dB	
Gain Variation (max)	+/- 2.0dB	+/-3dB	
Harmonics at P1dB	-20 dBc	-20dBc	
Third order intercept point IP3	10dB > P1dB	8dB> P1dB	
Noise figure	6.0dB	8.0 dB	

System Parameters		
Input Power (no damage)	+15 dBm	
Output VSWR tolerance	Infinite any phase	
Stability	Unconditional	
Output impedance	50 Ohm	
Output VSWR	2:1	
Input VSWR	2:1	
Spurious	-70 dBc (min) -80 dBc (typical)	
Safety interlock	Via rear panel D-sub connector	
Supply Voltage - 3 Phase	Delta or Star (Y)	
Supply Voltage - 1 Phase	90 to 132 or 180 to 240 VAC	
Supply Frequency	47 to 63 Hz	
Supply Power	1.5 kVA (typical full power)	
RF Input	Type N female	
RF Output	Type N female	
Dimension	19 inch, 15U amplifier mounted in 16U rack, 776mm Deep	
Weight	140 kg	

Amplifiers that meet today's and tomorrow's needs through upgradability.



of ISO 9001.

Specifications subject to change without notice. MILMEGA is an $\,$ $\label{local_products} \mbox{ISO accredited Company. Products are designed and}$ manufactured under strict quality and environmental requirements

