

# NETWAVE SERIES (3-PHASE)

## THREE-PHASE MULTIFUNCTIONAL AC/DC POWER SOURCES



### FOR TESTS ACCORDING TO ...

- › AIRBUS, BOEING
- › DO 160 Section 16, Section 18
- › LV 123
- › BMW GS 95023
- › MBN LV 123
- › VW 80300
- › VW 80303
- › PSA B21 7110
- › IEC/EN 61000-3-2, -3-12
- › IEC/EN 61000-3-3, -3-11
- › JIS C 61000-3-2
- › IEC/EN 61000-4-11, -4-29, -4-34
- › IEC 61000-4-13
- › IEC 61000-4-14
- › IEC 61000-4-17
- › IEC 61000-4-27
- › IEC 61000-4-28
- › MIL STD 461
- › MIL-STD-704

### NETWAVE - SIMULATION OF THE MOST REQUIRED POWER SUPPLY PHENOMENON

The NetWave Series (3-phase) are three-phase AC/DC power source, specifically designed to fully meet the requirements as per the standards IEC/EN 61000-4-13, -4-14, -4-28 and in addition to pre compliance testing to -4-27. It is also used as a DC power source to cover the requirements as per the standards IEC/EN 61000-4-17 (Ripple on DC) and IEC/EN 61000-4-29 for voltage dips and interruptions on DC supplies. The NetWave series is well suited for testing inverters (e.g. solar power, wind power) and e-vehicles like LV 123 standard. Additionally, the NetWave series (3-phase) offers the necessary capabilities for avionics testing as per DO-160, Airbus ABD0100 and Boeing as well as per MIL-STD-704 and is perfectly suited as reference source for Harmonics and Flicker testing.

Optionally the NetWave 3-phase series can be equipped with a power-recovery module to absorb fed-back power (AC/DC) up to nominal power of the NetWave.

### HIGHLIGHTS

- › **Wide Power Bandwidth; DC - 5 kHz**
- › **Output Power up to 270 kVA AC / 324 kW DC**
- › **Output up to 3\*690 VAC (p-p), +/-1120 VDC**
- › **High Inrush Current Capability**
- › **Power-recovery up to nominal power (optional)**

### APPLICATION AREAS

- |  |  |
|--|--|
|  AUTOMOTIVE |  AVIONICS         |
|  INDUSTRY   |  MILITARY         |
|  MEDICAL    |  RENEWABLE ENERGY |

**TECHNICAL DETAILS**

**BENEFITS**

**NETWAVE - THE POWERFUL MULTITALENT FOR AC AND DC SUPPLY SIMULATION**

The programmable 3-phase AC/DC power sources with their wide frequency bandwidth offer powerful waveform generation capabilities for various test applications in the EMC area and for avionics testing. Based on a Dual-Processor technology, with an integrated high-performance PC, a digital signal processor (DSP) and equipped with a hard disk, the NetWave Series is capable to generate and record waveforms in realtime.


According to standard requirements a pure sinusoidal voltage is needed for harmonics and flicker measurements. The output voltage of the NetWave Series is therefore guaranteed to have a very low distortion (THD) of less than 0.1% regardless of the load. No matter whether waveforms are programmed of segments or of single points (normally resulting in MBs of data) the NetWave masters it all.

Interfaces like GPIB and Ethernet are common features with the NetWave Series.

**AUTOMOTIVE APPLICATIONS**

**THE COMPLETE SOLUTION FOR HV COMPONENTS TESTING**

With the NetWave it is possible for the first time to check HV components up to 1120 VDC according to LV 123. The additional LF amplifier AMP 200Nx uses the CN 200Nx to couple voltage ripples up to 450 kHz to the supply lines. With the closed loop method, the netwave.control software measures the voltage ripple and continuously controls the amplitude.

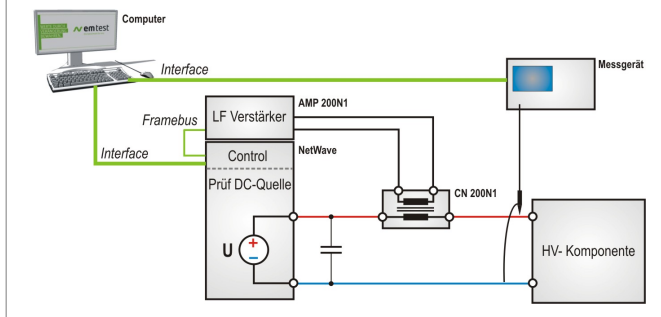

**SOFTWARE NET.CONTROL**

**EDITING, DOCUMENTING AND MANAGING YOUR WAVEFORMS AND STANDARD TESTS**

net.control is the new all-in-one software platform to easily and conveniently control the NetWave Series. By means of net.control the user can program any kind of waveforms either composed from segments or points and download them into the NetWave. Enhanced graphic tools are at hand to adjust the waveform according to individual requirements.

net.control provides a library of an extensive compilation of predefined segments as well as tens of thousands of standard test routines as per EMC and avionics standards.

net.control is also handling any waveform recorded by other method (e.g. captured by an oscilloscope) or imported as Excel or CSV files. All waveforms can be downloaded into the NetWave.

net.control offers an enhanced reporting tool to generate test and measuring reports and can be used under Windows 7, Windows 8 and Windows 10.



**TECHNICAL DETAILS**

**EXPAND YOUR SOURCE**

**COMBINE TWO OR THREE NETWAVE FOR HIGHER OUTPUT VOLTAGE OR OUTPUT POWER**

Save budget by buying one NetWave today and expand your testing capabilities tomorrow. The NetWave family offers the capability to expand the power or voltage range by combining several units. Double the voltage with the CascadeSource option (Opt-3 CS) or form a powerful three phase AC source with the MultiSource option (Opt-3 MS) - both is possible.



**MODEL OVERVIEW**

3-PHASE NETWAVE-MODELS	
NetWave	3-phase Multifunction AC/DC source
NetWave 20.x	22,5 kVA AC / 27 kW DC support with wheels
NetWave 30.x	30 kVA AC / 36 kW DC, support with wheels
NetWave 67.x	67 kVA AC / 72 kW DC, support with wheels optional
NetWave 90.x	90 kVA AC / 110 kW DC, stationary placement
NetWave 108.x	108 kVA AC / 150 kW DC, stationary placement

**TECHNICAL DETAILS**

NETWAVE 20	
Output voltage	0 V - 3*300 V AC (p-n) 0 V - +/- 425 V DC, (850 VDC*)
Output current	26 A (RMS) continuous 47 A (RMS) short-term (max. 3 s) 200 A repetitive peak

NETWAVE 20.2	
Output voltage	0 V - 3*360 V AC (p-n) 0 V - 3*620 V AC (p-p) 0 V - +/- 500 V DC, (1000 VDC*)
Output current (@ max. 300 V AC/360 V DC)	26 A (RMS) continuous 47 A (RMS) short-term (max. 3 s) 200 A repetitive peak

NETWAVE 20.3	
Output voltage	0 V - 3*400 V AC (p-n) 0 V - 3*690 V AC (p-p) 0 V - +/- 1120 V DC
Output current (@ max. 300 V AC/360 V DC)	26 A (RMS) continuous 47 A (RMS) short-term (max. 3 s) 200 A repetitive peak
PowerRecovery 20	Included

## TECHNICAL DETAILS

## TECHNICAL DETAILS

## NETWAVE 30

Output voltage	0 V - 3*300 V AC (p-n) 0 V - +/- 425 V DC, (850 VDC*)
Output current	33 A (RMS) continuous 66 A (RMS) short-term (max. 3 s) 250 A repetitive peak

## NETWAVE 30.2

Output voltage	0 V - 3*360 V AC (p-n) 0 V - 3*620 V AC (p-p) 0 V - +/- 500 V DC, (1000 VDC*)
Output current (@ max. 300 V AC/ 360 V DC)	33 A (RMS) continuous 66 A (RMS) short-term (max. 3 s) 250 A repetitive peak

## NETWAVE 30.3

Output voltage	0 V - 3*400 V AC (p-n) 0 V - 3*690 V AC (p-p) 0 V - +/- 1120 V DC
Output current (@ max. 300 V AC/ 360 V DC)	33 A (RMS) continuous 66 A (RMS) short-term (max. 3 s) 250 A repetitive peak
PowerRecovery 30	included

## NETWAVE 67

Output voltage	0 V - 3*300 V AC (p-n) 0 V - +/- 425 V DC, (850 VDC*)
Output current	75 A (RMS) continuous 100 A (RMS) short-term (max. 3 s) 400 A repetitive peak

## NETWAVE 67.2

Output voltage	0 V - 3*360 V AC (p-n) 0 V - 3*620 V AC (p-p) 0 V - +/- 500 V DC, (1000 VDC*)
Output current (@ max. 300 V AC/ 360 V DC)	75 A (RMS) continuous 100 A (RMS) short-term (max. 3 s) 400 A repetitive peak

## OPTION FOR DC EXTENDED VOLTAGE RANGE

* with option	OPT-3 DC-EVR, Double the DC voltage
---------------	--

## TECHNICAL DETAILS

## NETWAVE 67.3

Output voltage	0 V - 3*400 V AC (p-n) 0 V - 3*690 V AC (p-p) 0 V - +/- 1120 V DC
Output current (@ max. 300 V AC/ 360 V DC)	75 A (RMS) continuous 100 A (RMS) short-term (max. 3 s) 400 A repetitive peak
PowerRecovery 60	included

## NETWAVE 90.2

Output voltage	0 V - 3*360 V AC (p-n) 0 V - 3*620 V AC (p-p) 0 V - +/- 500 V DC, (1000 VDC*)
Output current (@ max. 300 V AC/360 V DC)	100 A (RMS) continuous 150 A (RMS) short-term (max. 3 s) 500 A repetitive peak

## NETWAVE 90.3

Output voltage	0 V - 3*400 V AC (p-n) 0 V - 3*690 V AC (p-p) 0 V - +/- 1120 V DC
Output current (@ max. 300 V AC/360 V DC)	100 A (RMS) continuous 150 A (RMS) short-term (max. 3 s) 500 A repetitive peak
PowerRecovery 90	included

## NETWAVE 108.3

Output voltage	0 V - 3*400 V AC (p-n) 0 V - 3*690 V AC (p-p) 0 V - +/- 1120 V DC
Output current (@ max. 300 V AC/360 V DC)	100 A (RMS) continuous 150 A (RMS) short-term (max. 3 s) 500 A repetitive peak
PowerRecovery 108	included

## TECHNICAL DETAILS

## TECHNICAL DETAILS

## EXTENDED CAPABILITIES FOR NETWAVE

Simple mode	Optimized control for integration of the Netwave into existing automation environments (for example Matlab)
SourceAC mode	PLL synchronization with other voltage sources
Trigger channel	Extended trigger functions
Segment "Step"	Ramping of voltage and/or frequency in constant time windows
Extern mode	Control of the NetWave by an external control signal

## NETWAVE XX.3

Lic-3 NetIndustry	included
Lic-3 NetAutomotive	included

## GENERAL DATA (ALL MODELS)

## SPECIFICATIONS

Output frequency	DC - 5,000 Hz
Frequency accuracy	100 ppm
Output connectors	Safety lab connectors CEE type 32 A (only for NetWave 20.x and NetWave 30.x)
Interfaces	GPIB Ethernet RS 232 (input from DPA analyser) Frame bus (internal system bus)
Phase accuracy	Resolution 1°
Output noise	< 50 V : 110 mV rms > 50 V : 320 mV rms
Slew Rate	8V/μs

## REGULATION

Voltage sense	Internal or external, 4 wires
Distortion (THD)	Less than 0.5 %, @50/60 Hz
Output voltage regulation	Better than 0.1 % of set value
Output voltage Accuracy	DC: +-0.2 % of set value +-0.15 % of full scale, AC: Add +-0.1 % of set frequency / 1000
Max. compensatable drop on wires	5 % of V nominal
Current limiter	5 A to I <sub>max</sub> (peak), Operation: Stop / Continued forward and reverse current
Protection	Over current Over voltage Over temperature Low voltage

## TRIGGER AND DUT MONITORING

Trigger	2 inputs, 2 outputs
DUT monitors	2 inputs, configurable

## TECHNICAL DETAILS

## GENERAL DATA (ALL MODELS)

WAVEFORM GENERATOR	
Segment types DC	DC, Ramp, Square, Triangle, Sawtooth, Step, Sine, Sine sweep, Sine ramp, Damped sinewave, Sine ripple, Profile, Square sweep, Noise, Sine Dwell, Sinc, Harmonic, Exponent ...
Segment types AC	Sine, Modulation, Sine sweep, Sweep on Sine, Sine up/down, Sine unbalance, Overswing, Sine offset, Sine Dip, Harmonic, Interharmonic, Interharmonic step, Harmonic distortion ...
Segment duration	Unlimited

DISPLAY AND CONTROLS	
Display	2-Line LCD, 40 characters
LED indicators	Power On Active output channel Trigger Functional status hard disk
Operation	6 function keys, Test On key: ON/OFF key for the power source

DIMENSIONS (ROLLS AND CRANE SUPPORT INCLUDED)	
NetWave 20.x	approx. 1785 x 930 x 755 mm approx. 1785 x 1210 x 755 mm (recovery)
NetWave 30.x	approx. 1785 x 930 x 755 mm approx. 1785 x 1210 x 755 mm (recovery)
NetWave 67.x	approx. 2080 x 1205 x 970 mm approx. 2080 x 1615 x 970 mm (recovery)
NetWave 90.2	approx. 2080 x 1810 x 970 mm
NetWave 90.3	approx. 2080 x 2410 x 970 mm
NetWave 108.3	approx. 2080 x 2410 x 970 mm

## GENERAL DATA (ALL MODELS)

WEIGHT (ROLLS AND CRANE SUPPORT INCLUDED)	
NetWave 20.x	approx. 740 kg approx. 810 kg (recovery)
NetWave 30.x	approx. 740 kg approx. 810 kg (recovery)
NetWave 67.x	approx. 1,180 kg approx. 1,380 kg (recovery)
NetWave 90.2	approx. 1,700 kg
NetWave 90.3	approx. 2,000 kg (recovery)
NetWave 108.3	approx. 2,000 kg (recovery)

MAINS	
Supply voltage	3 x 400 V (3P,PE); optional 3 x 480 V (3P,PE)
Input current	50 A/90 A (NetWave 20.x)* 70 A/140 A (NetWave 30.x)* 160 A/212 A (NetWave 67.x)* 210 A/318 A (NetWave 90.x)* 252 A/381 A (NetWave 108.x)* * the higher figure represents the 3s short-term current
Line frequency	45 Hz - 65 Hz
Connectors	Screwed terminals

AMBIENT CONDITIONS	
Temperature	5°C - 35°C
Rel. humidity	10 % - 90 %, non condensing
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1,060 mbar)

**TECHNICAL DETAILS**

**OPTIONS**

OPTIONAL SOFTWARE	
Lic-3 NetIndustry	Software license for industrial standards IEC 61000-4-13, -4-14, -4-17, -4-27, -4-28
Lic-3 NetHarmonics	Software license for harmonics analysis as per IEC 61000-3-2, -3-12 and ECE-R10
Lic-3 NetFlicker	Software license for flicker analysis as per IEC 61000-3-3 and -3-11
Lic-3 NetAircraft DO	Software license for DO-160 standard for NetWave-series (3-phase)
Lic-3 NetMilitary	Software license for MIL-STD-704 standard for NetWave-series (3-phase), requires filter box F-Box 3 for LDC / HDC 103
Lic-3 NetAircraft Airbus	Software license for AIRBUS standards for NetWave-series (3-phase)
Lic-3 NetAircraft Boeing	Software license for BOEING standards for NetWave-series (3-phase) Requires NetWave model for 360 VAC or higher
Lic-3 NetAutomotive	Software license for Automotive application

**MULTI SOURCE OPTIONS**

MULTI SOURCE	
Opt-3 MS xx	Option to connect in parallel three NetWave sources, switched in parallel mode (triple power), e.g. 3x NW90.2 -> NW90.2MS
Available Options	Opt-3 MS 20/30 Opt-3 MS 67 Opt-3 MS 90
Requirements	Each equipped with Opt-3 Parallel Three identical models only

NETWAVE 20 MS	
AC Voltage (L-N)	300 V
DC Voltage	425 V
Output Power AC	67.5 KVA
Output Power DC	27 kW
Output Current	78 A (RMS) continuous
Output Current	41 A (RMS) short-term (max. 3s)
Output Current	400 A repetitive peak

NETWAVE 20.2 MS	
AC Voltage (L-N)	360 V
DC Voltage	500 V
Output Power AC	67.5 kVA
Output Power DC	27 kW
Output Current	78 A (RMS) continuous
Output Current	141 A (RMS) short-term (max. 3s)
Output Current	400 A repetitive peak

NETWAVE 20.3 MS	
AC Voltage (L-N)	400 V
DC Voltage	560 V
Output Power AC	67.5 kVA
Output Power DC	27 kW
Output Current	78 A (RMS) continuous
Output Current	141 A (RMS) short-term (max. 3s)
Output Current	400 A repetitive peak

**TECHNICAL DETAILS**

**MULTI SOURCE OPTIONS**

NETWAVE 30 MS	
AC Voltage (L-N)	300 V
DC Voltage	425 V
Output Power AC	90 kVA
Output Power DC	32 kW
Output Current	99 A (RMS) continuous
Output Current	198 A (RMS) short-term (max. 3s)
Output Current	500 A repetitive peak

NETWAVE 30.2 MS	
AC Voltage (L-N)	360 V
DC Voltage	500 V
Output Power AC	90 kVA
Output Power DC	32 kW
Output Current	99 A (RMS) continuous
Output Current	198 A (RMS) short-term (max. 3s)
Output Current	500 A repetitive peak

NETWAVE 30.3 MS	
AC Voltage (L-N)	400 V
DC Voltage	560 V
Output Power AC	90 kVA
Output Power DC	32 kW
Output Current	99 A (RMS) continuous
Output Current	198 A (RMS) short-term (max. 3s)
Output Current	500 A repetitive peak

**MULTISOURCE OPTIONS**

NETWAVE 67 MS	
AC Voltage (L-N)	300 V
DC Voltage	425 V
Output Power AC	201 kVA
Output Power DC	72 kW
Output Current	225 A (RMS) continuous
Output Current	300 A (RMS) short-term (max. 3s)
Output Current	600 A repetitive peak

NETWAVE 67.2 MS	
AC Voltage (L-N)	360 V
DC Voltage	500 V
Output Power AC	201 kVA
Output Power DC	72 kW
Output Current	225 A (RMS) continuous
Output Current	300 A (RMS) short-term (max. 3s)
Output Current	600 A repetitive peak

NETWAVE 67.3 MS	
AC Voltage (L-N)	400 V
DC Voltage	560 V
Output Power AC	201 kVA
Output Power DC	72 kW
Output Current	225 A (RMS) continuous
Output Current	300 A (RMS) short-term (max. 3s)
Output Current	600 A repetitive peak



**TECHNICAL DETAILS**

**MULTISOURCE OPTIONS**

NETWAVE 90.2 MS	
AC Voltage (L-N)	360 V
DC Voltage	425 V
Output Power AC	270 kVA
Output Power DC	110 kW
Output Current	300 A (RMS) continuous
Output Current	450 A (RMS) short-term (max. 3s)
Output Current	1,000 A repetitive peak

NETWAVE 90.3 MS	
AC Voltage (L-N)	400 V
DC Voltage	560 V
Output Power AC	270 kVA
Output Power DC	110 kW
Output Current	300 A, (RMS) continuous
Output Current	450 A (RMS) short-term (max. 3s)
Output Current	1,000 A repetitive peak

**CASCADE SOURCE OPTIONS**

CASCADE SOURCE	
Opt-3 CS	Option to connect in series two NetWave sources, switched in series mode (double voltage), e.g. 2x NW90.2 -> NW90.2CS
Available Options	Opt-3 CS 20/30 Opt-3 CS 67 Opt-3 CS 90
Requirements	Each equipped with Opt-3 Parallel Two identical models only

NETWAVE 20 CS	
AC Voltage (L-N)	600 V
DC Voltage	850 V
Output Power AC	45 kVA
Output Power DC	54 kW
Output Current	78 A (RMS) continuous
Output Current	141 A (RMS) short max. 3s
Output Current	400 A repetitive peak

NETWAVE 20.2 CS	
AC Voltage (L-N)	720 V
DC Voltage	1,000 V
Output Power AC	45 kVA
Output Power DC	54 kW
Output Current	78 A (RMS) continuous
Output Current	141 A (RMS) short max. 3s
Output Current	400 A repetitive peak

NETWAVE 20.3 CS	
AC Voltage (L-N)	800 V
DC Voltage	1,120 V
Output Power AC	45 kVA
Output Power DC	54 kW
Output Current	78 A (RMS) continuous
Output Current	141 A (RMS) short max. 3s
Output Current	400 A repetitive peak

**TECHNICAL DETAILS**

**CASCADE SOURCE OPTIONS**

NETWAVE 30 CS	
AC Voltage (L-N)	600 V
DC Voltage	850 V
Output Power AC	60 kVA
Output Power DC	64 kW
Output Current	99 A (RMS) continuous
Output Current	198 A (RMS) short max. 3s
Output Current	500 A repetitive peak

NETWAVE 30.2 CS	
AC Voltage (L-N)	720 V
DC Voltage	1,000 V
Output Power AC	60 kVA
Output Power DC	64 kW
Output Current	99 A (RMS) continuous
Output Current	198 A (RMS) short max. 3s
Output Current	500 A repetitive peak

NETWAVE 30.3 CS	
AC Voltage (L-N)	800 V
DC Voltage	1,120 V
Output Power AC	60 kVA
Output Power DC	64 kW
Output Current	99 A (RMS) continuous
Output Current	198 A (RMS) short max. 3s
Output Current	500 A repetitive peak

**CASCADE SOURCE OPTIONS**

NETWAVE 67 CS	
AC Voltage (L-N)	600 V
DC Voltage	850 V
Output Power AC	134 kVA
Output Power DC	144 kW
Output Current	225 A (RMS) continuous
Output Current	300 A (RMS) short max. 3s
Output Current	600 A repetitive peak

NETWAVE 67.2 CS	
AC Voltage (L-N)	720 V
DC Voltage	1,000 V
Output Power AC	134 kVA
Output Power DC	144 kW
Output Current	225 A (RMS) continuous
Output Current	300 A (RMS) short max. 3s
Output Current	600 A repetitive peak

NETWAVE 67.3 CS	
AC Voltage (L-N)	800 V
DC Voltage	1,120 V
Output Power AC	134 kVA
Output Power DC	144 kW
Output Current	225 A (RMS) continuous
Output Current	300 A (RMS) short max. 3s
Output Current	600 A repetitive peak

**TECHNICAL DETAILS**

**CASCADE SOURCE OPTIONS**

NETWAVE 90.2 CS	
AC Voltage (L-N)	720 V
DC Voltage	1,000 V
Output Power AC	180 kVA
Output Power DC	220 kW
Output Current	300 A (RMS) continuous
Output Current	450 A (RMS) short max. 3s
Output Current	1,000 A repetitive peak

NETWAVE 90.3 CS	
AC Voltage (L-N)	800 V
DC Voltage	1,120 V
Output Power AC	180 kVA
Output Power DC	220 kW
Output Current	300 A (RMS) continuous
Output Current	450 A (RMS) short max. 3s
Output Current	1,000 A repetitive peak

**OPTIONS**

NW-BOARD MEASURING MODULE	
Channels	Built in 6 channel (3-phase) measurement board for 3* voltage 3* current
Voltage ranges	25 V, 50 V, 100 V, 250 V, 550 V, unipolar or bipolar
Current ranges	10 A, 25 A, 50 A, 100 A, 220 A, unipolar or bipolar
Resolution	16 Bit
Accuracy	Voltage: +-0.05 % of reading +-0.2 % of range Current: +-0.2 % of reading +-0.3 % of range
Frequency range	DC - 100 kHz
Sampling rate	5Hz - 200 kHz, selectable
Memory	Min. 40 GB on hard disk, File size max. 1 GB
PC requirements	Minimum Intel i5 with 8 GB RAM or similar
Measuring Parallel Mode	NetWave 20.x NetWave 30.x

**TECHNICAL DETAILS**

**OPTIONS**

PARALLEL MODE HARDWARE (OPTION PARALLELMODE 20/30, 67, 90, 108)	
Parallel Mode 20/30, 67, 90, 108	Parallels all three phases to one. The common 1-phase output is on a separate terminal block for EUT connection. During parallel mode disconnect the 3-phase terminals from the source.
NetWave 20.x	78 A (RMS) continuous 141 A (RMS) short max. 3s 400 A repetitive peak
NetWave 30.x	99 A (RMS) continuous 198 A (RMS) short max. 3s 500 A repetitive peak
NetWave 67.x	225 A (RMS) continuous 300 A (RMS) short max. 3s 600 A repetitive peak
NetWave 90.x	300 A (RMS) continuous 450 A (RMS) short max. 3s 1,000 A repetitive peak
NetWave 108.x	300 A (RMS) continuous 450 A (RMS) short max. 3s 1,000 A repetitive peak

**OPTIONS**

POWER RECOVERY (OPTION RECOVERY 20/30, 67, 90, 108)	
Available for	all 3-phase NetWave models
Mains voltage	400 V +/- 10% (45 Hz - 65 Hz)
Recoverable power	up to nominal AC/DC power of the individual NetWave model
Recovery 20	for NetWave 20.x Max. 22.5 kVA AC / 27 kW DC 26 A (RMS) continuous 47 A (RMS) short max. 3 s 200 A repetitive peak
Recovery 30	for NetWave 30.x Max. 30 kVA AC / 36 kW DC 33 A (RMS) continuous 66 A (RMS) short max. 3 s 250 A repetitive peak
Recovery 67	for NetWave 67.x Max. 67 kVA AC / 72 kW DC 75 A (RMS) continuous 100 A (RMS) short max. 3 s 400 A repetitive peak
Recovery 90	included in Netwave 90.3, Max. 90 kVA AC / 110 kW DC 100 A (RMS) continuous 150 A (RMS) short max. 3 s 500 A repetitive peak
Recovery 108	included in Netwave 108.3, Max. 108 kVA AC / 132 kW DC 100 A (RMS) continuous 150 A (RMS) short max. 3 s 500 A repetitive peak
Power factor	> 0.92 (cos phi) at full load

DC EXTENDED VOLTAGE RANGE	
OPT-3 DC-EVR	Double DC voltage range, using two phases simultaneously, available only for 3-phase NetWaves
NetWave 20, 30, 67, 90, 108	Extended from 425 VDC to 850 VDC
NetWave X0.2 models	Extended from 500 VDC to 1000 VDC
NetWave X0.3 models	Extended from 560 VDC to 1120 VDC included

ROLLS FOR NETWAVE 67.X	
Support with wheels	Support with wheels for NetWave 67.x

**TECHNICAL DETAILS**

**ACCESSORIES**

FILTER BOX F-BOX 3-60	
Application	Lowpass filter for smoothing the dc voltage for very low ripple application < 500 mV
Standard	MIL-HDBK-704-7 HDC 103 MIL-HDBK-704-8 LDC 103 other applications with low ripple signals
Application MIL-HDBK	Test condition A (10 Hz) Test condition B (25 Hz)
Voltage	AC: 230 V DC: 500 V
Current	60 A
Frequency	max. 60 Hz
Dimension (LxWxH)	200 mm x 150 mm x 60 mm
Weight	1.65 kg

FILTER BOX F-BOX 3-100	
F-BOX 3 Application	Lowpass filter for smoothing the dc voltage for very low ripple application < 500 mV
Standard	MIL-HDBK-704-7 HDC 103 MIL-HDBK-704-8 LDC 103 other applications with low ripple signals
Application MIL-HDBK	Test condition A (10 Hz) Test condition B (25 Hz)
Voltage	AC: 230 V DC: 500 V
Current	100 A
Frequency	max. 60 Hz
Dimension (LxWxH)	255 mm x 180 mm x 80 mm
Weight	3.25 kG

**ACCESSORIES**

FILTER BOX L-BOX 1-32A	
Application	50 µH decoupling coils with integrated 10 µF capacitor for MIL-STD-704 LDC
Max EUT Voltage	500 VDC / 360 VAC
Max EUT current	32 A

FILTER BOX L-BOX 1-100A	
Application	50 µH decoupling coils with integrated 10 µF capacitor for MIL-STD-704 LDC
Max EUT Voltage	500 VDC / 360 VAC
Max EUT current	100 A

**OTHER SOLUTIONS & OPTIONS**

OTHER MODELS	
NetWave Series (1-phase)	Single phase Multifunction AC/DC Power sources, up to 7,500 VA AC and 9,000 W DC

## TECHNICAL DETAILS

## HARMONIC &amp; FLICKER OPTIONS

## EQUIPMENT FOR HARMONICS AND FLICKER

DPA 503N	3-phase Harmonics and Flicker analyzer
AIF 503N16	3-phase flicker impedance, 3x400 V, 16 A 0.24ohm + j0.15ohm (Lines) 0.16ohm + j0.10ohm (Neutral)
AIF 503N16.1	3-phase flicker impedance, 3x400 V, 16 A 0.24ohm + j0.15ohm (Lines) 0.16ohm + j0.10ohm (Neutral) Rackmounted inside a MRAC 25

## FLICKER IMPEDANCES WITH ZREF AND ZTEST

General	3-phase dual-impedance, Zref: 0.24 ohm + j0.15 ohm (Lines) 0.16 ohm + j0.10 ohm (Neutral) Ztest: 0.15 ohm + j0.15 ohm (Lines) 0.10 ohm + j0.10 ohm (Neutral)
AIF 503N32.1	3x400 V, 32 A
AIF 503N63.1	3x400 V, 63 A
AIF 503N75.1	3x400 V, 75 A

## AUTOMOTIVE OPTIONS


## AUDIO AMPLIFIERS

AMP 200N1.1	LF Signalgenerator & Amplifier, DC to 250 kHz, (500 kHz), 800 W, Output voltage max. 140 Vp-p, 50 Vrms
-------------	--

## COUPLING TRANSFORMERS

	Coupling transformer to couple sinusoidal disturbances to AC and DC lines
CN 200N1	frequency 10 Hz to 250 kHz, sec. current up to 50 A, sec. voltage 400 VAC/600 VDC
CN 200N100	frequency 50 Hz to 500 kHz, sec. current up to 100 A, sec. voltage 1400 VAC/2000 VDC
CN 200N200	frequency 100 Hz to 450 kHz, sec. current up to 200 A, sec. voltage 800 VAC/1200 VDC
CN 200N300	frequency 100 Hz to 450 kHz, sec. current up to 300 A, sec. voltage 800 VAC/1200 VDC

# COMPETENCE WHEREVER YOU ARE

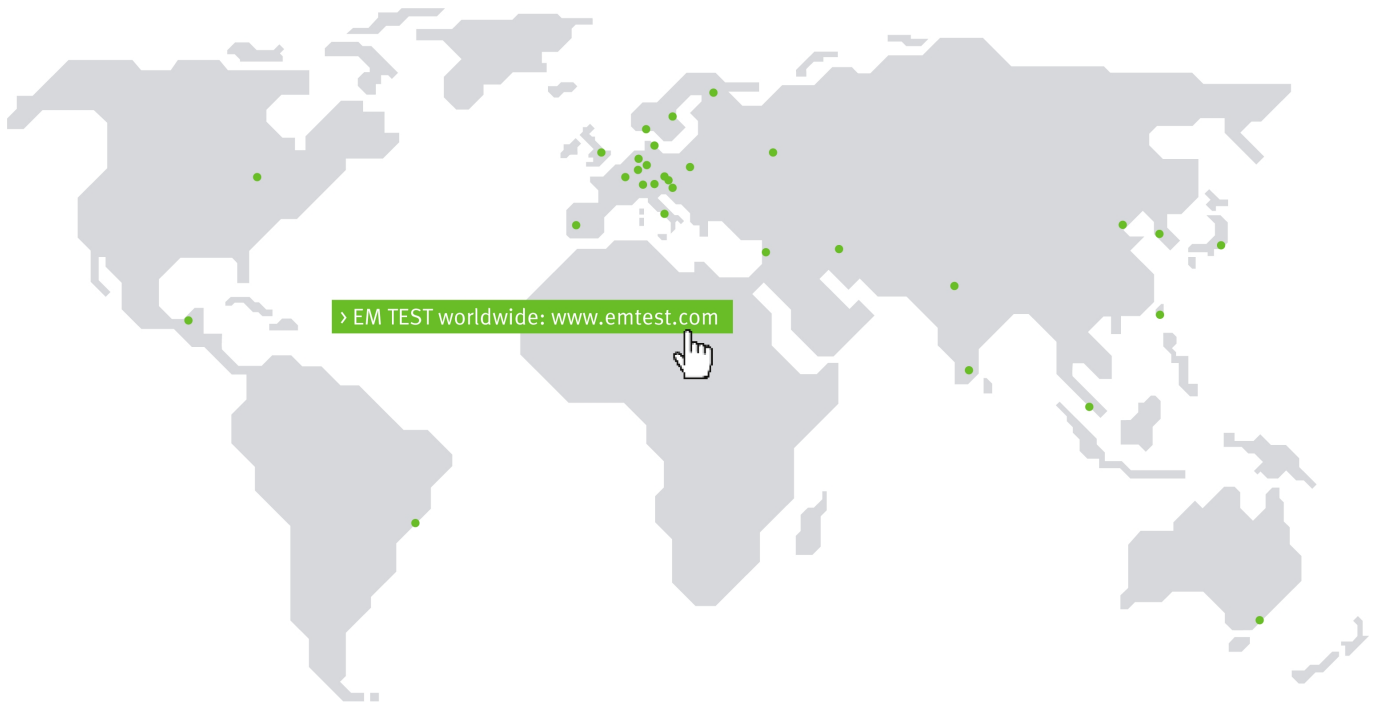

## CONTACT EM TEST DIRECTLY

### Switzerland

AMETEK CTS GmbH › Sternenhofstraße 15 › 4153 Reinach › Switzerland  
Phone +41 (0)61 204 41 11 › Fax +41 (0)61 204 41 00  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [sales.conducted.cts@ametek.com](mailto:sales.conducted.cts@ametek.com)

### Germany

AMETEK CTS Europe GmbH › Customer Care Center EMEA › Lünener Straße 211  
› 59174 Kamen › Germany  
Phone +49 (0) 2307 26070-0 › Fax +49 (0) 2307 17050  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [info.cts.de@ametek.com](mailto:info.cts.de@ametek.com)

### Poland

AMETEK CTS Europe GmbH › Biuro w Polsce › ul. Twarda 44 › 00-831 Warsaw › Poland  
Phone +48 (0) 518 643 12  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [Infopolska.cts@ametek.com](mailto:Infopolska.cts@ametek.com)

### USA / Canada

AMETEK CTS US › 52 Mayfield Ave › Edison › NJ 08837 › USA  
Phone +1 732 417 0501  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [usasales.cts@ametek.com](mailto:usasales.cts@ametek.com)

### P.R. China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd. › Beijing Branch › Western Section, 2nd floor › Jing Dong Fang Building (B10) › Chaoyang District › Beijing, China, 100015  
Phone +86 10 8526 2111 › Fax +86 (0)10 82 67 62 38  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [chinasales@ametek.com](mailto:chinasales@ametek.com)

### Republic of Korea

EM TEST Korea Limited › #405 › WooYeon Plaza › #986-8 › YoungDeok-dong › Giheung-gu › Yongin-si › Gyeonggi-do › Korea  
Phone +82 (31) 216 8616 › Fax +82 (31) 216 8616  
Internet: [www.emtest.co.kr](http://www.emtest.co.kr) › E-mail: [sales@emtest.co.kr](mailto:sales@emtest.co.kr)

### Singapore

AMETEK Singapore Pte. Ltd › No. 43 Changi South Avenue 2 › 04-01 Singapore 48164  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [singaporesales.cts@ametek.com](mailto:singaporesales.cts@ametek.com)

### Great Britain

AMETEK GB › 5 Ashville Way › Molly Millars Lane › Wokingham › Berkshire RG41 2 PL › Great Britain  
Phone +44 845 074 0660  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com)

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.