

# GRAS 67AX

ø400 mm CCP Ground Array  
Microphone Kit



Freq range: 3.15 Hz to 20 kHz  
Dyn range: 22 dB(A) to 150 dB  
Sensitivity: 12.5 mV/Pa

---

The GRAS 67AX ½" CCP Ground Array Microphone Set consists of a ½" precision pressure microphone with built-in CCP preamplifier, a ø400 mm mounting plate, and an adapter for a BNC cable.

## Typical applications and use

- Ground array measurements
- General noise measurements
- Ideal for the aerospace industry


## Design

The 67AX is a ground array microphone kit designed for the aerospace industry, i.e. for measurement of noise from overhead aircraft.

The microphone set is designed to sit asymmetrically in the mounting to attain a more uniform frequency response for measurements.

The [GRAS 47AX](#) microphone is a IEC 61094 1/2" CCP Flush-mount Microphone Set with a dynamic range from 22 dB to 150 dB and a frequency range from 3.15 Hz to 20 kHz. Its height of only 8 mm (to the diaphragm) is the ideal match for the design of the 67AX. The built-in preamplifier is a low noise constant current power (CCP) type, with a built-in TEDS circuit for automatic transducer identification.

Polarization/Connection		0 V / CCP
Frequency range (±1 dB)	Hz	5 to 12.5 k
Frequency range (±2 dB)	Hz	3.15 to 20 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	22
Dynamic range upper limit	dB	150
Dynamic range upper limit with GRAS CCP preamplifier	dB	149
Set sensitivity @ 250 Hz (±2 dB)	mV/Pa	12.5
Microphone venting		Rear
IEC 61094-4 Compliance		15
Output impedance	Ω	<50
Temperature range, operation	°C / °F	-30 to 70 / -22 to 158
Temperature range, storage	°C / °F	-40 to 85 / -40 to 185
Static pressure coefficient @250 Hz	dB/kPa	-0.008
Humidity range non condensing	% RH	1 to 100
Humidity coefficient @250 Hz	dB/% RH	< 0.1
Influence of axial vibration @1 m/s <sup>2</sup>	dB re 20 µPa	66
TEDS UTID (IEEE 1451.4)		27 v. 1.0
Connector type		BNC
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	15 / 0.529

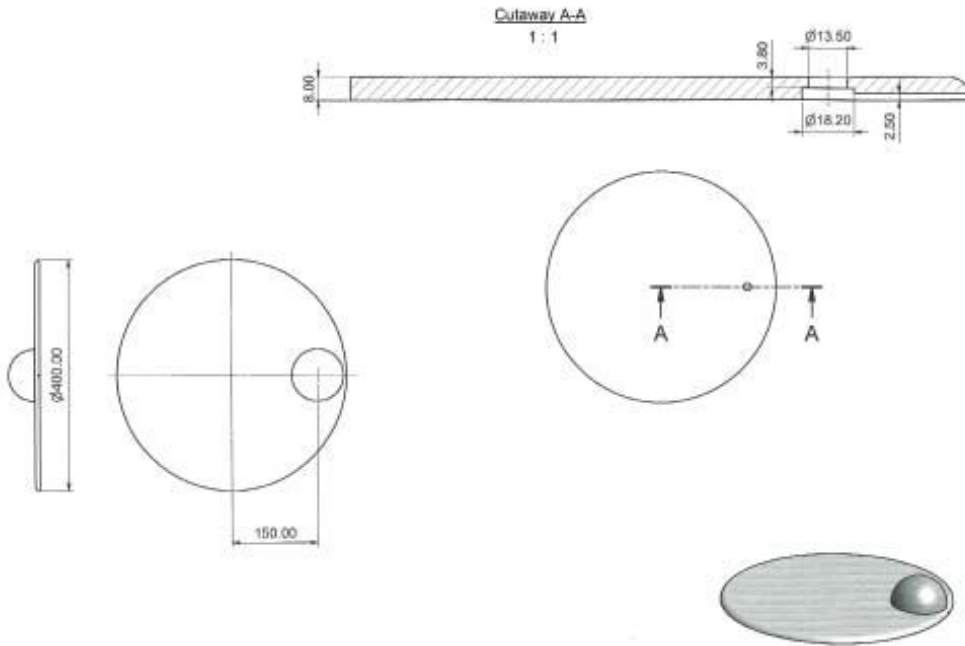

*Placement of the microphone in the plate with the windscreen on top. The cutaway of section A to A shows how the microphone fits into the plate.*

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

## Included items

<a href="#">GRAS 47AX-S1</a>	1/2" CCP Flush-mounted Microphone Set
GRAS GR1425	Ground plate Ø400 mm
GRAS AM0375	Windscreen for 67AX
GRAS AA0097	3 m Microdot Angled - BNC cable

## Optional accessories

<a href="#">GRAS 42AP</a>	Intelligent Pistonphone, Class 0
GRAS RA0216	Pistonphone field-verification adapter
GRAS RA0221	Pistonphone calibration adapter

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more  
than 40 countries

**HEAD OFFICE, DENMARK**  
**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.gras.dk](http://www.gras.dk)  
[gras@gras.dk](mailto:gras@gras.dk)

**USA**  
**GRAS SOUND & VIBRATION**  
5750 S.W. Arctic Drive  
Beaverton, OR 97005  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.gras.us](http://www.gras.us)  
[sales@gras.us](mailto:sales@gras.us)

**CHINA**  
**GRAS SOUND & VIBRATION**  
Room 303, Building T6  
Hongqiaohui, 990, Shenchang Road  
Minhang District, Shanghai  
China, 201106  
Tel: +86 21 64203370  
[www.gras.com.cn](http://www.gras.com.cn)  
[cnsales@gras.dk](mailto:cnsales@gras.dk)



## ABOUT GRAS SOUND & VIBRATION

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

**GRAS** Sound  
& Vibration