

The Hera 3P is designed to perform pre-compliance emission and full compliance immunity tests at 3m distance on commercial equipment. The design of the structure is optimised for maximum performances, in minimum space. The chamber and its absorbers are manufactured by SIEPEL.

### CHARACTERISTICS

#### Compliance & Performances

	Normalised site attenuation (NSA) CISPR 16-1-4	Site VSWR CISPR 16-1-4	Field uniformity IEC/EN 61000-4-3
Measurement distance	3 m	3 m	3 m
Frequency range	200 MHz - 1 GHz	1 GHz - 18 GHz	80 MHz - 18 GHz
Guaranteed performances	± 4 dB	< 6 dB	0 / +6 dB
Compliance	Pre-compliant	Full-compliant	Full-compliant

#### Dimensions (L x W x H)

Total overall with steel stiffeners	Internal usable dimensions
8.3 x 4.6 x 3.4 m 27 x 15 x 11 ft	6.9 x 2.9 x 2.4 m 23 x 9 x 8 ft

#### Quality

- All absorbers batches are tested by SIEPEL for reflectivity performances between 30 MHz – 1000 MHz.
- Our raw materials are compliant to RoHS / REACH and free of substances in the current list of Substances of Very High Concern (SVHC) published by the European Chemicals Agency (ECHA).

#### About our absorbers

- HY absorbers power handling: 2 kW/m<sup>2</sup> (CW).
- Both absorbers coated with either aqueous or plastic paint are classified ISO class 4 (ISO 14644-1:2015) clean room conditions.

#### SHIELDING EFFECTIVENESS COMPLIES WITH EN 50147-1 (10 kHz - 18 GHz)

Radiated emission (EMI) testing: Pre compliant with the following standards from 30 MHz to 18 (40) GHz:

- CISPR 11, EN 50147-2,
- CISPR 16-1-4, EN 55011,
- CISPR 22 / EN 55022, ANSI C63.4
- CISPR 32,

Radiated immunity (EMS) testing: Fully compliant with EN/IEC 61000-4-3.

Radio standards: All ETSI standards referring to CISPR 16 and EN/IEC 61000-4-3.

### OUR STRENGTHS

- High-quality components & parts
- Guarantee of 20 years for the RF performances of our absorbers
- Guaranteed performances
- Control of performances before shipment
- Measurement department accredited ISO/IEC 17025:2005 (accreditation n° 1-6220, scope available on [www.cofrac.fr](http://www.cofrac.fr))
- Fast delivery: permanent stock available off the shelves
- Setting-up of the chambers by our dedicated installation team




### CONFIGURATION



#### MODULAR SHIELDING

Self-standing structure up to 18 (40) GHz  
Steele stiffeners




#### DOOR

Manual single leaf swing door  
Clearance 1.2 x 2.1 m



#### WALL PANELS

Penetration panel on frame including coaxial feedthroughs and waveguides




#### VENTILATION

Honeycomb air vents  
300 x 300 mm up to 18 (40) GHz



#### POWER DISTRIBUTION

Power filter single phase 32 A  
Power filter three-phase 32 A  
Electrical package: power distribution, lighting



#### OPTIMISED ABSORBER LINING

Microwave pyramidal absorbers (walls and ceiling)  
Removable pyramidal absorbers for emission & immunity (floor)  
Truncated type on the ceiling above test volume



#### RAISED FLOOR

With ground plane



#### TURNTABLE

Diameter 1.2 m - Max payload 500 kg



#### PROJECT REALISATION

Project management  
Technical design & study  
On-site installation




#### PERFORMANCE VERIFICATION

Shielding effectiveness at 900 MHz at critical locations

All rights reserved. Information presented in this document are not contractual & subject to modifications without notice.

### AVAILABLE OPTIONS

- Shielded control and amplifier rooms
- Extended shielding performances up to 40 GHz
- Plastic paint for pyramidal absorbers with wide range of colors
- Other types and dimensions of doors
- Electrically-assisted door's latching/unlatching
- Antenna positioner
- Floor hatches with connection points
- Additional power filters, data filters and special feedthroughs
- CCTV/audio monitoring systems
- On request, some measurements can be accredited ISO 17025 (accreditation number 1-6220, scope available on [www.cofrac.fr](http://www.cofrac.fr)).
- Military /Automotive / RadioCom standards compliance
- Others on demand

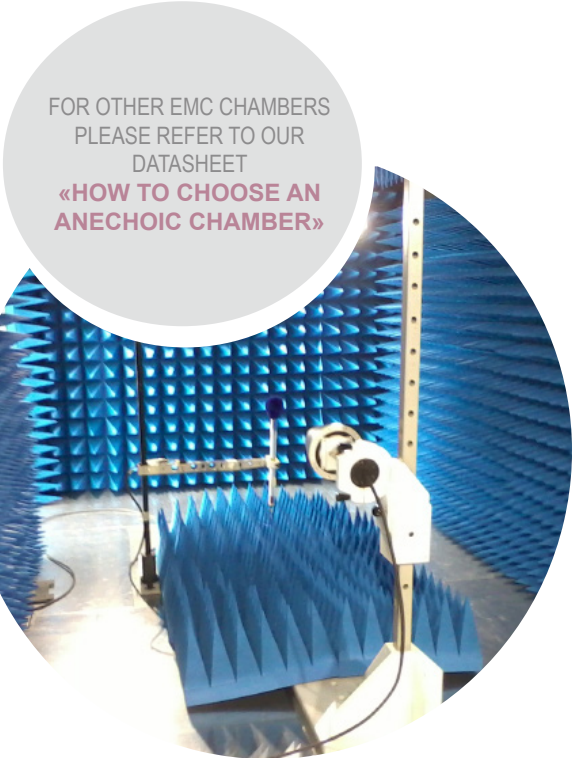

FOR OTHER EMC CHAMBERS  
PLEASE REFER TO OUR  
DATASHEET  
«HOW TO CHOOSE AN  
ANECHOIC CHAMBER»