

The Woodhaven AMERICAN ORIGINAL



ASSEMBLY:

To assemble, bolt the horizontal bottom tube (B) on the inside of the welded end section (A)-see inset. Slide the bolts through from the outside of the rack to give a nice, clean look. The nuts have a nylon insert to prevent them from working loose. The threaded side of the nut goes on first and will require (2) 7/16" wrenches to tighten. Do not over tighten.

COVER:

Woodhaven was the first to design covers to cover firewood the way it needs to be! It keeps the top dry and ready to burn, and allows for air to flow through the firewood to reduce mold and mildew and promote curing. Our standard cover fits around the 4 uprights of the rack and moves down as the wood stack is used. Sewn-in wind straps may be used for windy conditions.

IMPORTANT PLACEMENT:

To prevent the possibility of this product tipping over, it **MUST** be placed on a hard, level surface such as concrete or heavy concrete stepping stones. **NEVER PLACE THIS RACK ON DIRT OR ANY OTHER UNSTABLE SURFACE. CHILDREN SHOULD NOT BE ALLOWED TO PLAY ON THE RACK.**

To find more information about proper burning techniques please visit www.firewoodcenter.com.

We value your feedback. Visit firewoodracks.com to leave any comments, suggestions or testimonials.

Shop "Woodhaven" Gear, Replacement Parts & Covers at firewoodracks.com

8 Pack Replacement Caps \$9.95 • 6 Pack of "Woodhaven" Cozies \$9.95

The Woodhaven "Protect the Wood" T-Shirts \$12.95

Full Line of Full Covers in Black, Brown and Mossy Oak




Patent Pending Alexander Mfg. Co., Inc



**Assembly
Instructions**

Firewood Rack Assembly Instructions
4 ft • 5 ft • 6 ft Firewood Racks

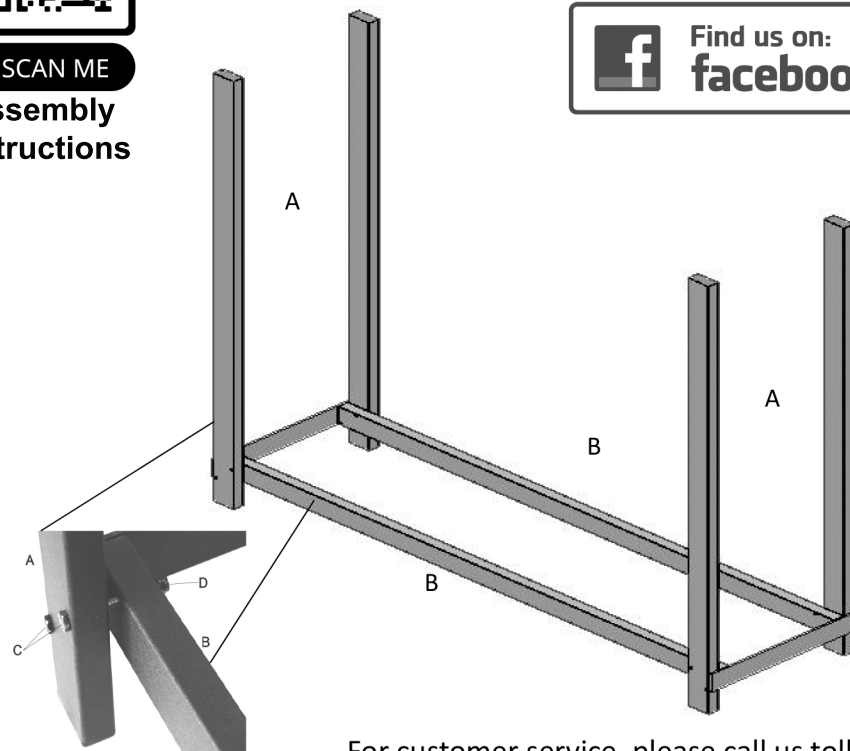

For customer service, please call us toll free at
888-421-5010 8 am -5 pm M-F CST

Parts Required for 4 ft • 5 ft • 6 ft Woodhaven Firewood Racks

PART	IMAGE	DESCRIPTION	QUANTITY
A		WELDED END SECTION	2
B		BOTTOM RAIL	2
C		2 1/2 BOLT	8
D		SELF LOCKING NUT	8