



MYSTIC²

With 3x the performance capability of the previous generation, Mystic 2 boasts an atmosphere you must see and feel to believe. The new supercharged fan and improved heating technology creates a *Haze for Daze*.

TECHNICAL SPECIFICATIONS

10 YEAR WARRANTY

120V Mystic 2
Rated Voltage: 120vac
Frequency: 50/60hz
Power Consumption: 1600W/13.3 amps
Breaker: 15A 250V

VOLTAGE DETECTION

MAXIMIZED OUTPUT

220V Mystic 2 (special order)
Rated Voltage: 120vac
Frequency: 50/60hz
Power Consumption: 1600W/7.3 amps
Breaker: 15A 250V

ETL LISTED

- FEATURES**
- ▶ Tank Capacity: 5L (10L for Mystic 2 Tour Pack)
 - ▶ Control: DMX, RDM, Manually
 - ▶ Intuitive Operating System
 - ▶ Standby Mode
 - ▶ 50 Second Warm-Up
 - ▶ 5-pin Neutrik DMX (3ch: Haze, Fan, Power)
 - ▶ Integrated Timer
 - ▶ Continuous Output
 - ▶ No CO2 Required
 - ▶ Directional Output
 - ▶ Automatic Self Cleaning
 - ▶ Haze Color: Pure White




Compatible Master FX Fluids:
[Nebulous](#) (thin density) | [Obscure](#) (thick density)

Fluid Consumption Rates (GPH = gallons per hour)

| When Using Nebulous Haze Fluid | When Using Obscure Haze Fluid |
|---|---------------------------------------|
| 100% Output = 5L in 6.4 hrs (0.2GPH) | 100% Output = 5L in 5.5hrs (0.23GPH) |
| 75% Output = 5L in 8.33 hrs (0.16GPH) | 75% Output = 5L in 6.9hrs (0.19GPH) |
| 50% Output = 5L in 11.9 hrs (0.11 GPH) | 50% Output = 5L in 10.4hrs (0.12GPH) |
| 25% Output = 5L in 20.8 hrs or (0.063GPH) | 25% Output = 5L in 16.6hrs (0.079GPH) |


OVERVIEW + DIMENSIONS

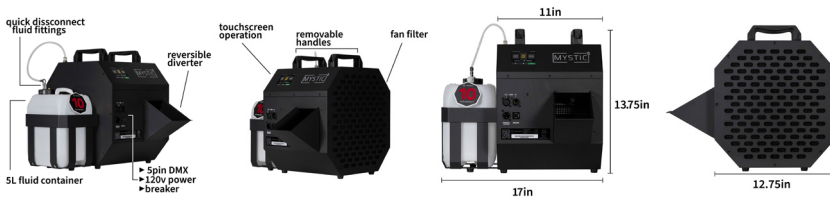

weight: 41lbs

DOWNLOAD CAD

MYSTIC 2 TOUR PACKAGE

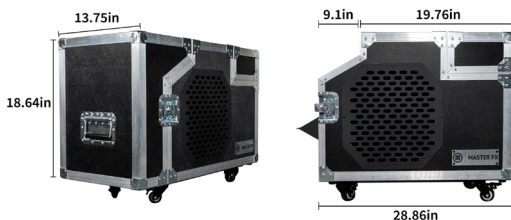

weight: 83lbs

APPROVALS

- ETL Listed: Certified to CSA STD C22.2# 104

INCLUDED ITEMS

- 5L Fluid Container (10L with tour pack)
- Quick Dissconnect Fluid Fittings
- 5ft PowerCon True1 (16AWG)

RIGGING

- Mounting location: top
- Mounting brackets replace handles
- Safety cable attachment point

OPTIONAL ACCESSORIES

- Universal Mounting Brackets
- Road Case