




SPECIFICATIONS

- Copper-free, corrosion-resistant mirror.
- Tolerance: $\pm 0.0625"$
- Mirror must mount flush with tile or surround.
- UL Listed for use in showers.
- Transformer located in remote/accessible area.
- Electrical: 24Volt/85Watt.

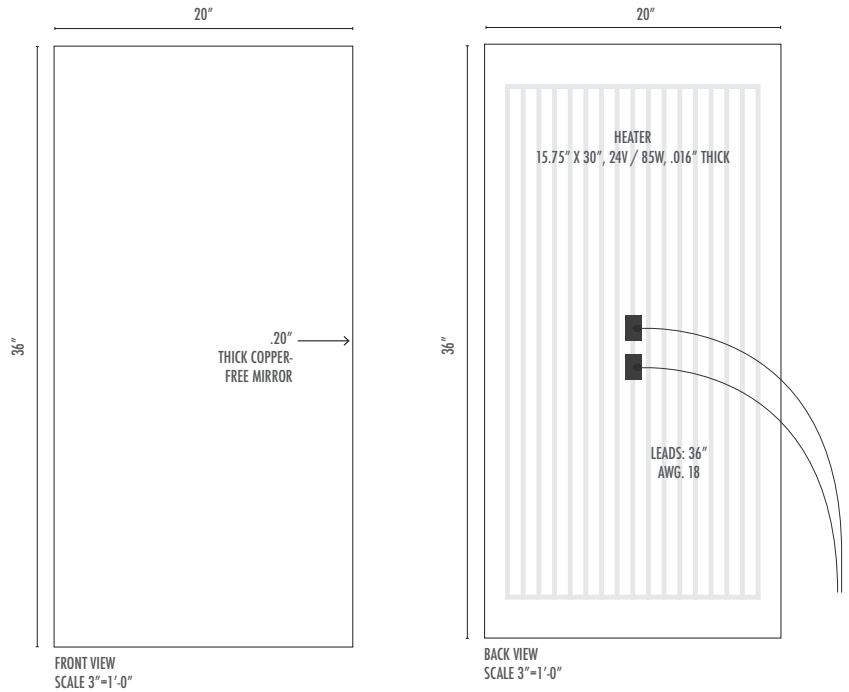

**JUSTIN 101-24
CLASS 2 POWER SUPPLY**

- Input voltage: 120VA 60HZ
- Rate current: 4100mA
- Output voltage: AC 24V
- Manual Reset Overload Protection
- Mounting Brackets
- 1/2" input nipple located for direct "J" box entry
- UL Listed Class 2 Transformer File E12056
(meets or exceeds the requirements set forth in Underwriters Laboratories Standard for safety (UL5085))

