



PIE AIR SUPER LIGHT 195+

195W 20V FULL BLK/TRNS



SUPER LIGHT

Glass-free and frameless, nevertheless robust solar module due to ETFE with a net weight of 3.0 Kg



EASY TO FIT

16 long holes for easy and universal usage



HIGH PERFORMANCE

Usage of special monocrystalline solar cells to absorb the maximum of sunlight and convert into energy



WARRANTY

6 Years product warranty & 25 years linear performance warranty (81% power assurance)

Electrical Characteristics

Type	Model
Maximum Power (Pmax)	195W+
Maximum Power Voltage (Vmp)	20V
Maximum Power Current (Imp)	9.75A
Open Circuit Voltage (Voc)	24.4V±3%*
Short Circuit Current (Isc)	10.33A±3%*
Module Efficiency (%)	> 19,4 %

Operating Conditions


Max. system voltage	IEC 1000V
Operating temperature range	-20°C – +60°C


Certification

IEC 61730
IEC 61215
IEC 61000

Mechanical Characteristics

Installation Module Dimension (L×W×H)	905 x 1130 x 3
Weight	3.0 kg
Cell (quantity / material / type / dimensions)	ULTRAtch COMPOSITE Material

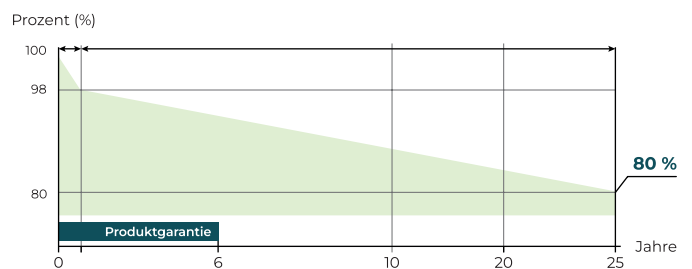

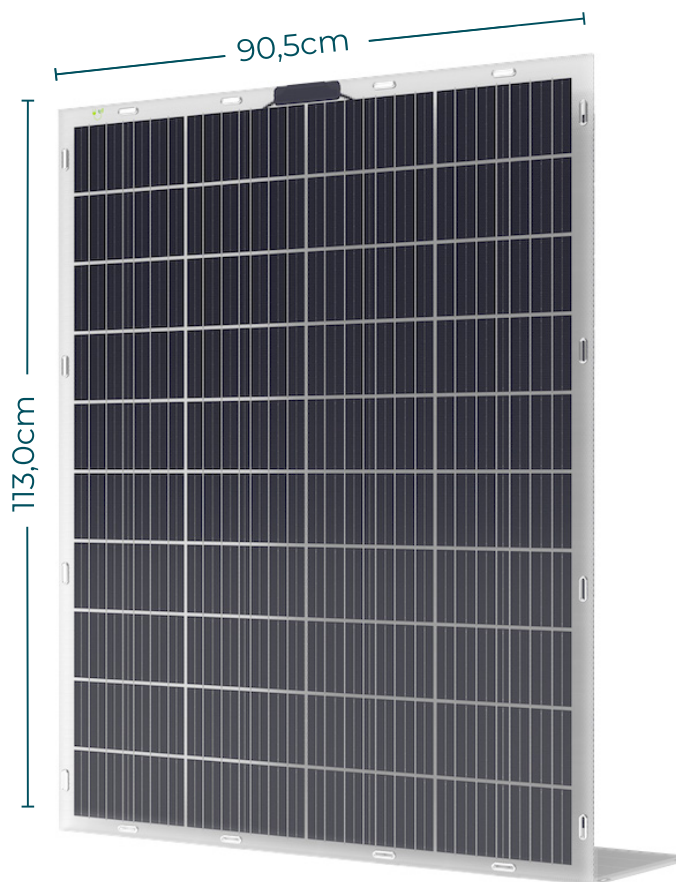

SIZE: 905 x 1130 x 3 mm