



INSTALLATION INSTRUCTIONS

www.vikingbags.com

888-208-1949 | support@vikingbags.com

VIKING DYNA MOTORCYCLE SWING ARM BAG INSTRUCTION

Parts

Dyna Swing arm Bracket
Nuts x 3

Instructions

Step 1

Remove belt guard.

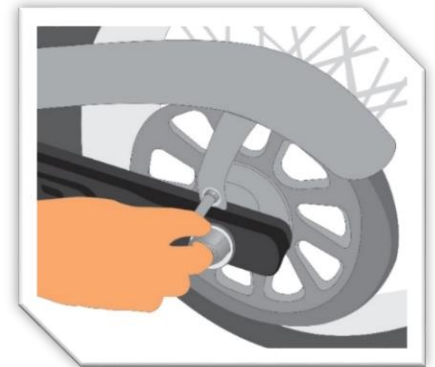


Fig (A)

Step 2

Install the bracket using the bolts used to mount foot peg and belt guard as shown in the images.

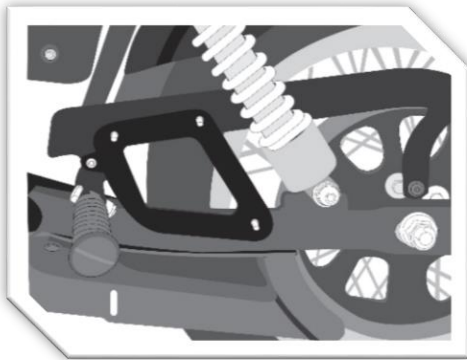


Fig (B)

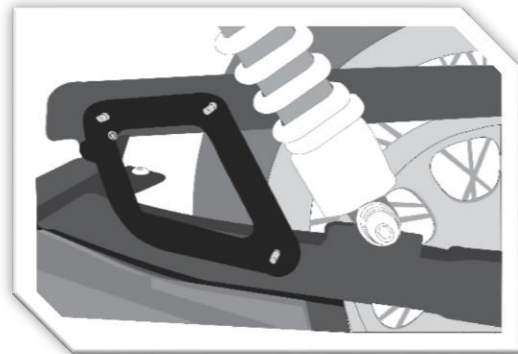


Fig (C)

Step 3

Hold the swingarm bag against the bracket and mark the position of bracket bolts on the back of the bag.



Fig (D)



INSTALLATION INSTRUCTIONS

www.vikingbags.com

☎ 888-208-1949 | ✉ support@vikingbags.com

Step 4

Drill the holes.

Step 5

Push the bag against the bracket so the bolt ends pass through the holes in the back of the bag. Tighten the bolts from inside using the provided nuts.



Fig (E)

📋 Note

You may need to remove passenger foot peg depending on size of the bag you are installing.

⚠ Warnings

- ✓ Avoid usage of the any mounting part that is impaired or is not working properly. If you are not secure about the installation of the saddlebags, do not use them.
- ✓ Sporadically check for shifting of the bag and verify that no part of the mounting system is interfering with any part of the motorcycle while riding. This includes the drive train, suspension, brakes or wheels.
- ✓ It is important to note that if you do not mount these saddlebags properly damage will be caused to the saddlebags and/or motorcycle. If bag are securely installed, no part of the mounting system or bags should touch the motorcycle while in operation.
- ✓ It is highly dangerous to operate a motorcycle if the saddlebags are not installed correctly. We suggest you find a motorcycle mechanic for further assistance in the event you have doubts about installation procedure.