


Viking Quick Detachable Saddlebag Installation for Triumph Thruxton RS:



Parts:

i	Mounting Bracket	x1
ii	Docking Post	x3
iii	Locking Nut	x1
iv	Socket Head Screw - M6 x 20	x1
v	Flathead Screw - M6 x 20	x2
vi	Round-Head Screw - M8 x 16	x2
vii	Washer	x2

Parts Diagram:

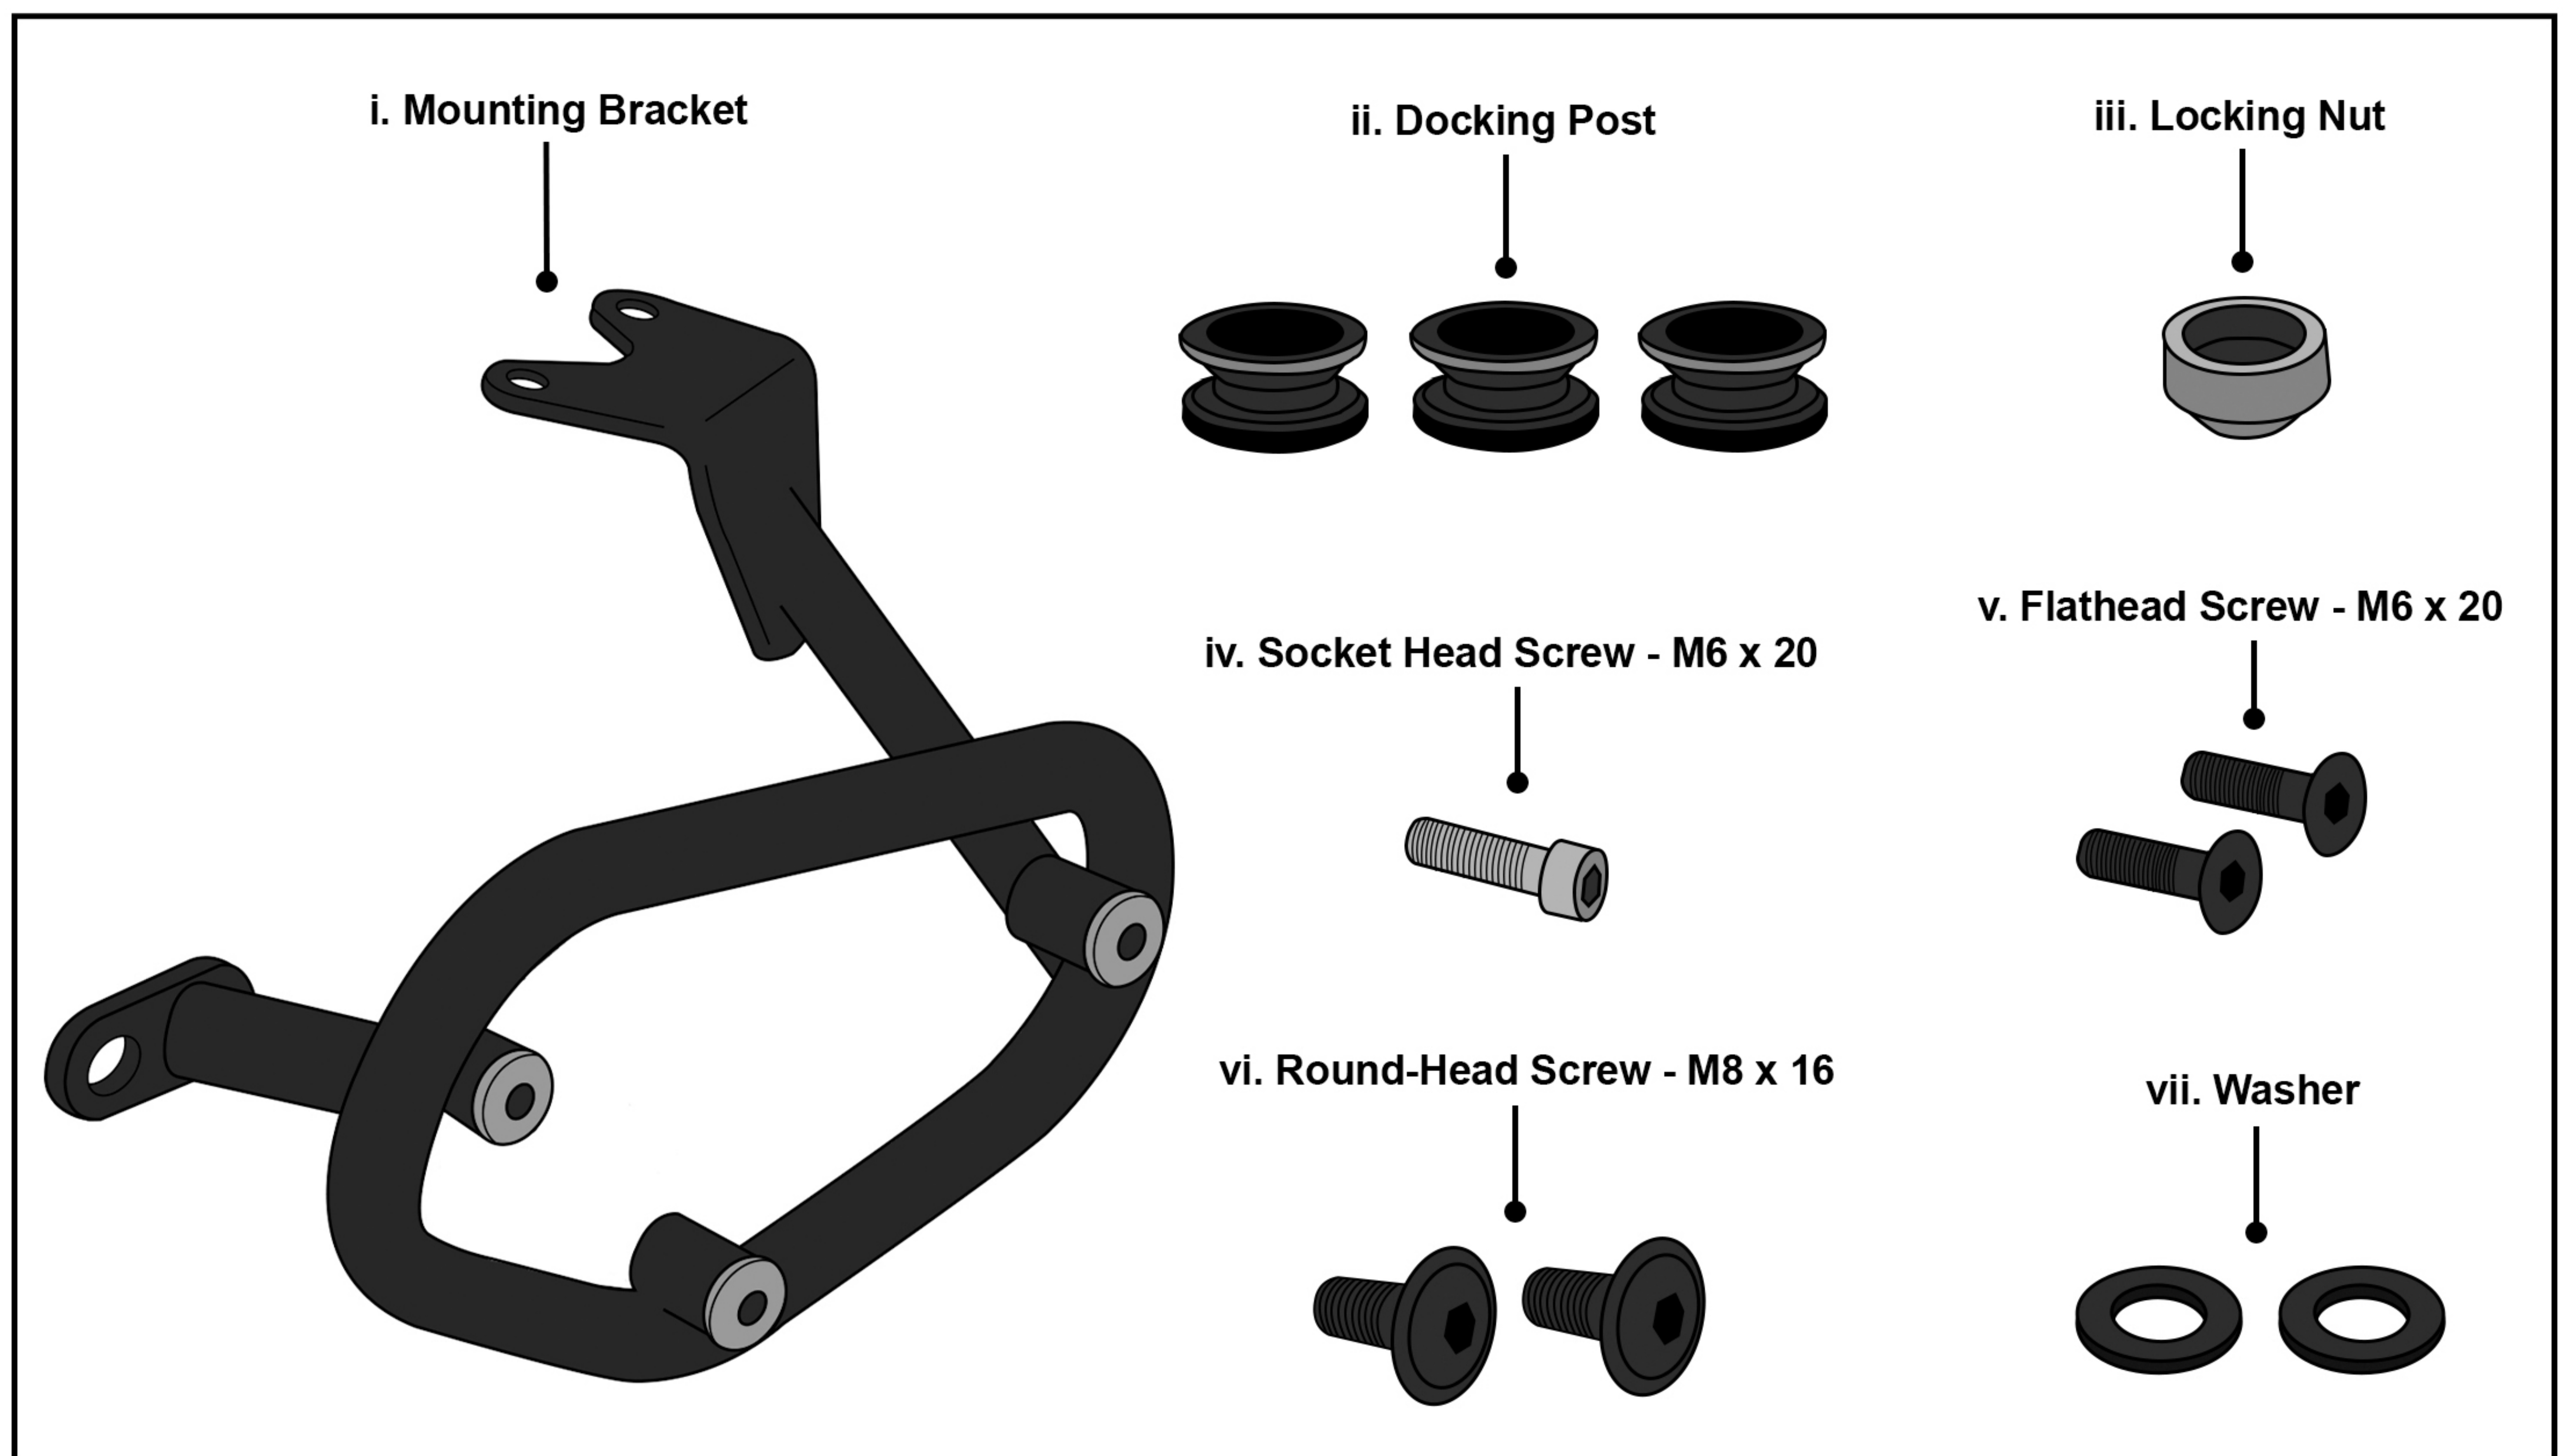

Installation Instructions:

Step 1:

Install the 3 Docking Posts (ii) and the locking nut (iii) to the mounting bracket as shown in Figure 1. Use Flat-head screws (v) to mount the docking posts and Socket-Head Screw (iv) to mount the locking nut. Apply medium thread locker and tighten to 8 N-m of torque.

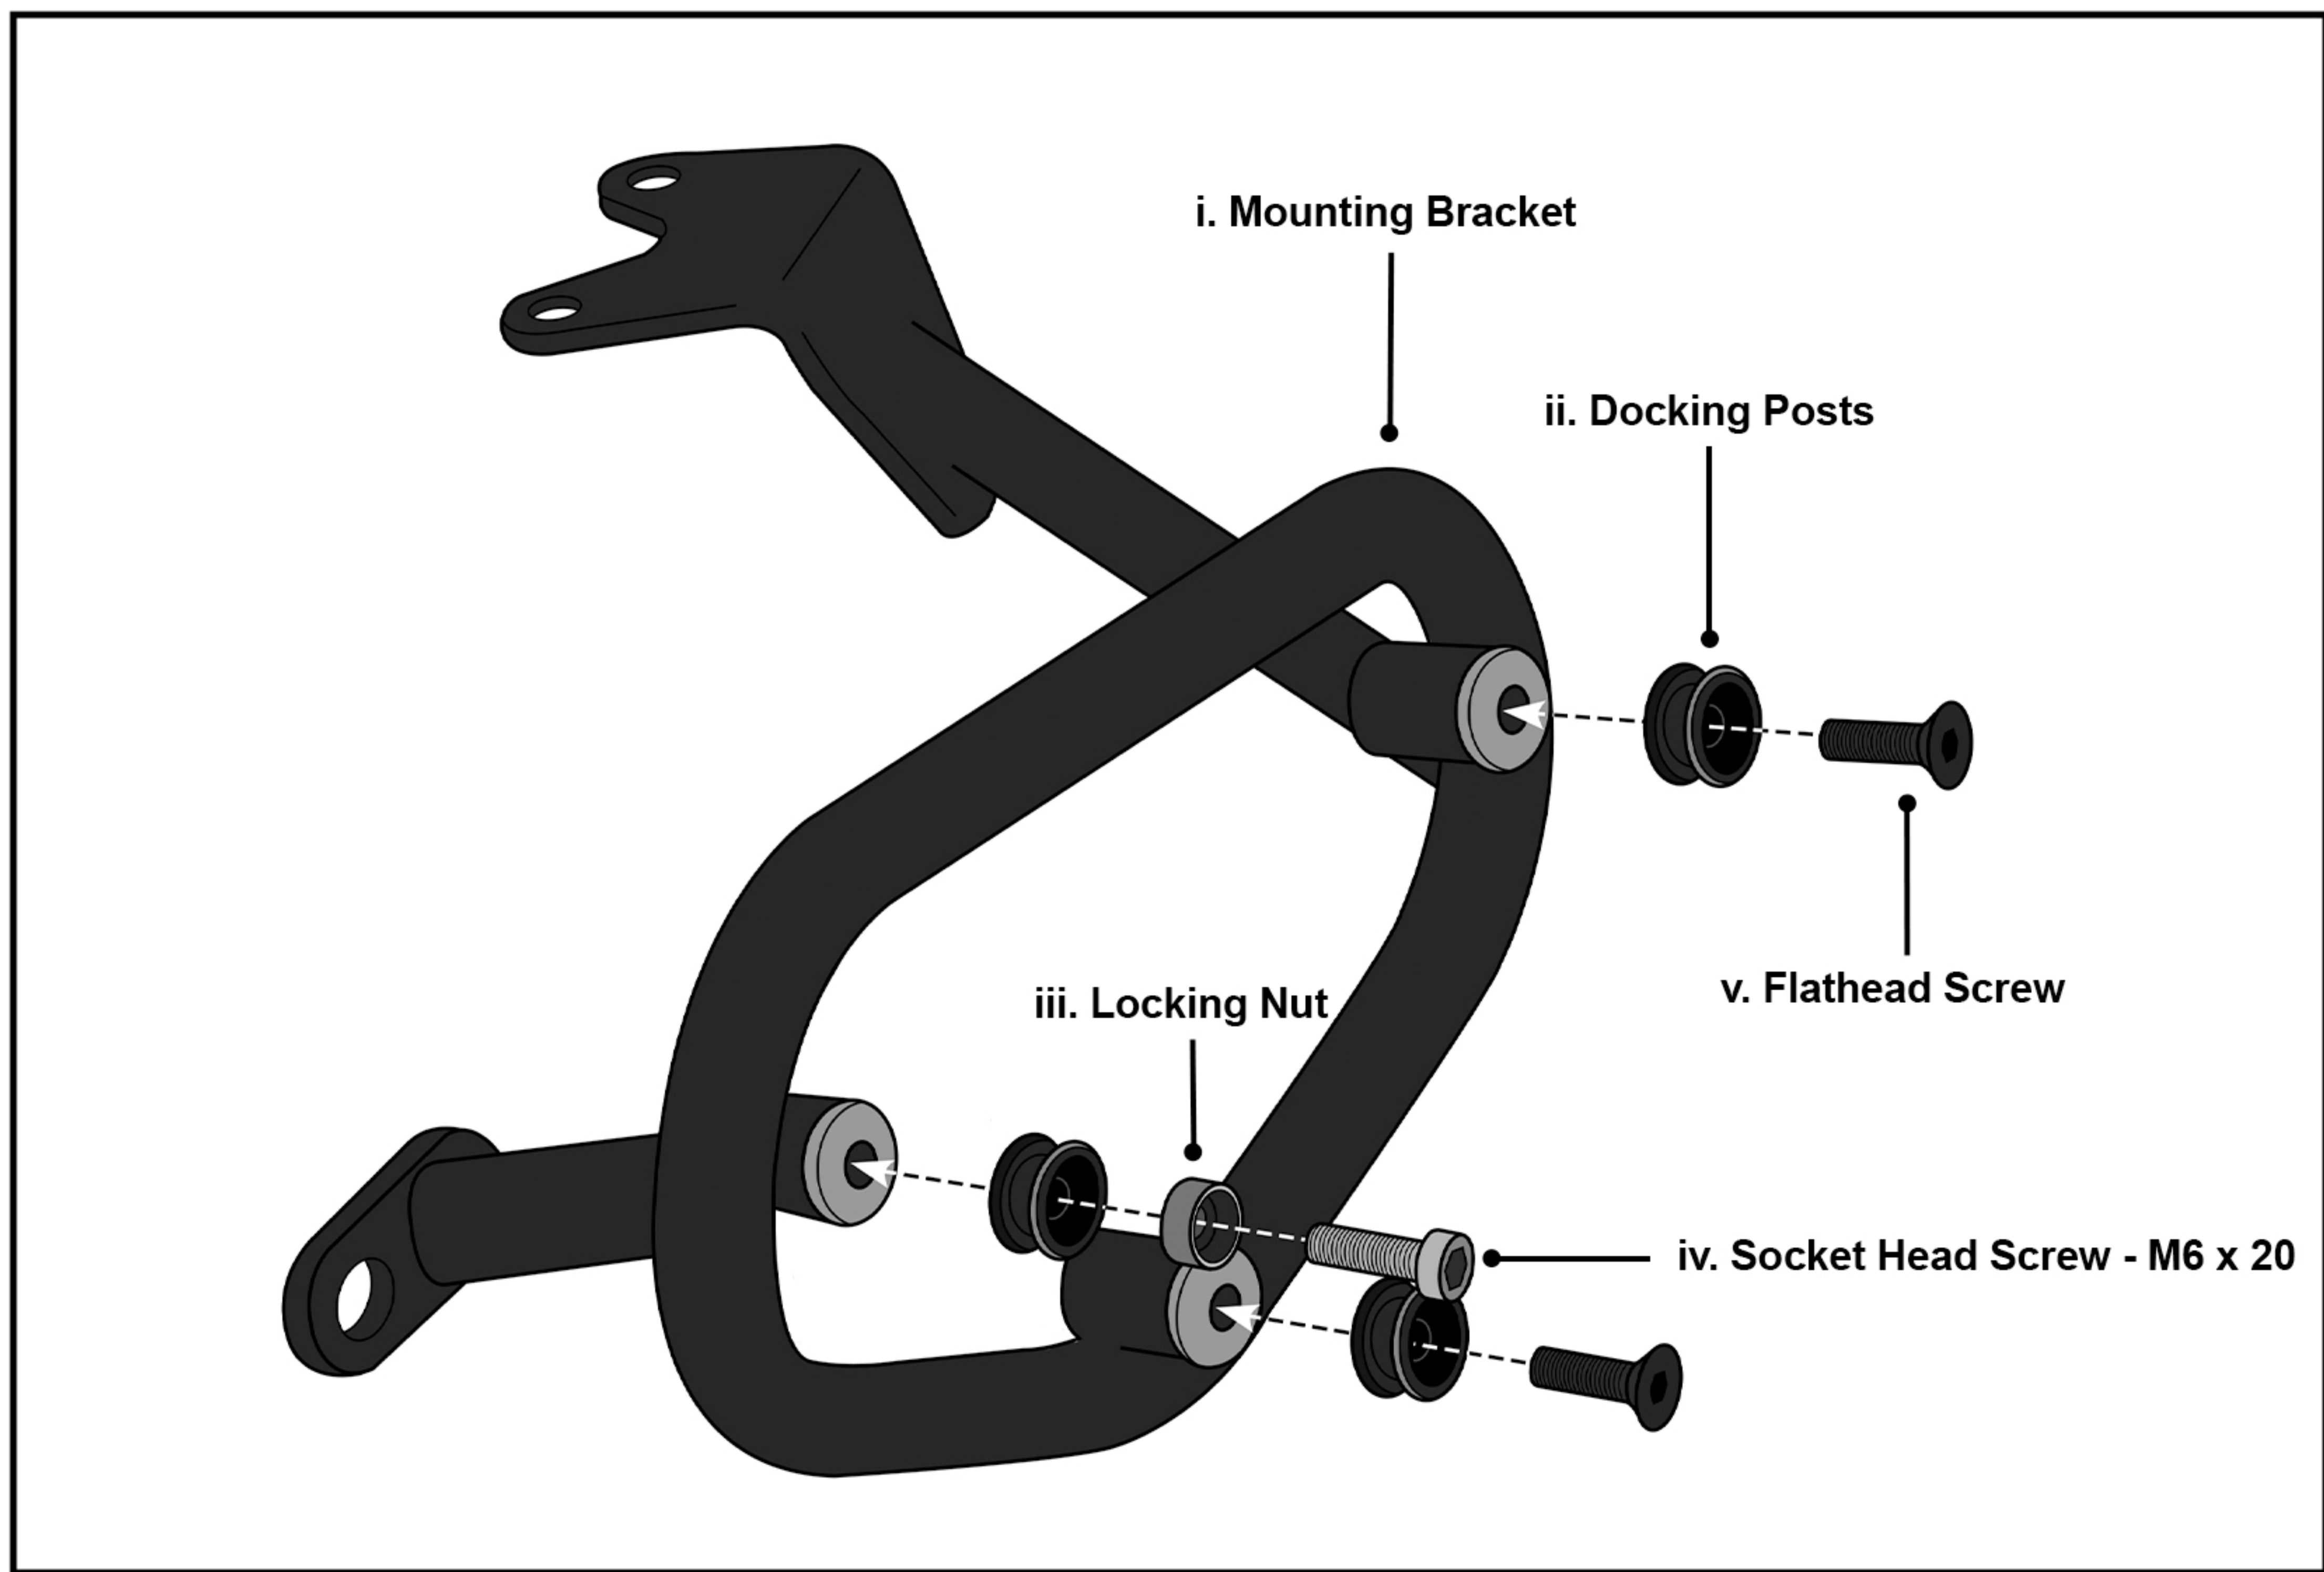


Fig 1. Assembling the Mounting Bracket

Step 2:

Remove the seat and unscrew the OEM shock bolt.

Step 3:

Install the mounting bracket using the provided Round-Head Screws (vi) and washers. Use the OEM bolt and washer to attach the mounting bracket to the shock absorber. See Figure 2.

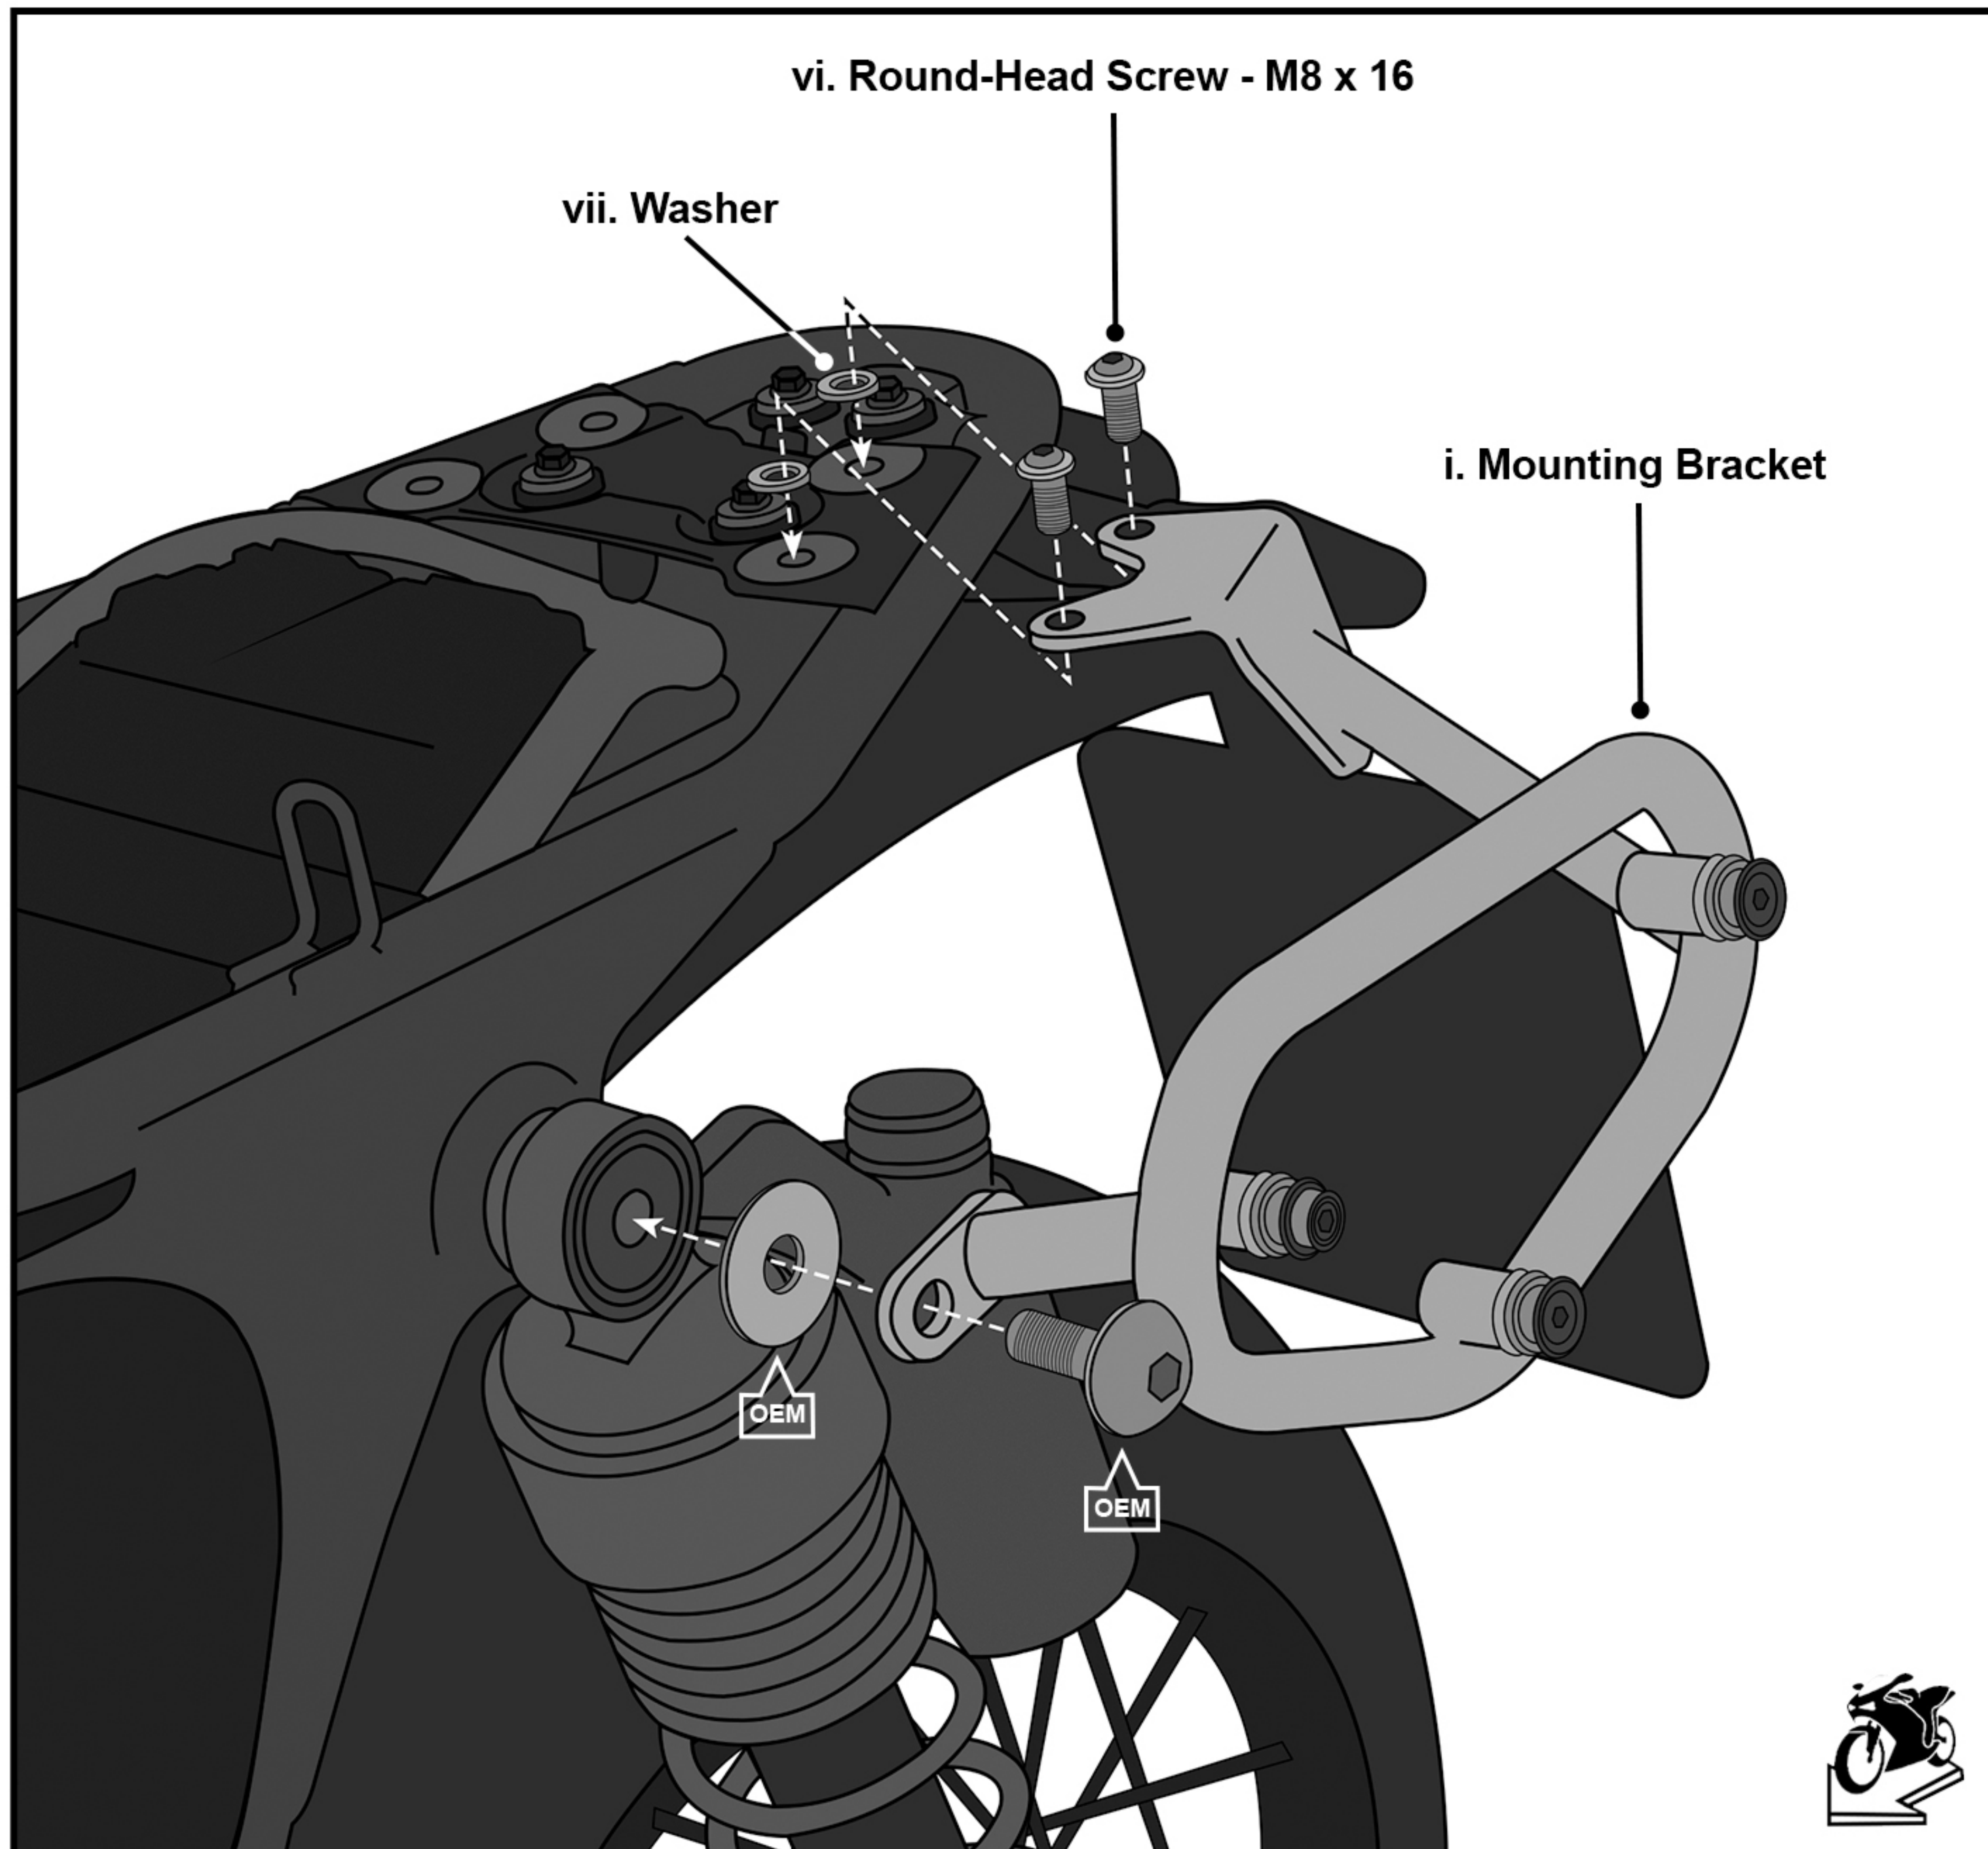


Fig 2. Installing the Mounting Bracket

Step 4:

With mounting bracket securely attached, reinstall the seat.

Step 5:

The back of the bag comes equipped with a quick disconnect bracket.

Attach the bag to the mounting bracket by aligning the holes in the quick disconnect bracket with the 3 docking posts. Push the bag downwards so that the docking posts engage with the grooves in the bracket and the bag locks in. See Figure 4.

Pull the lever to disengage the lock and remove the bag.


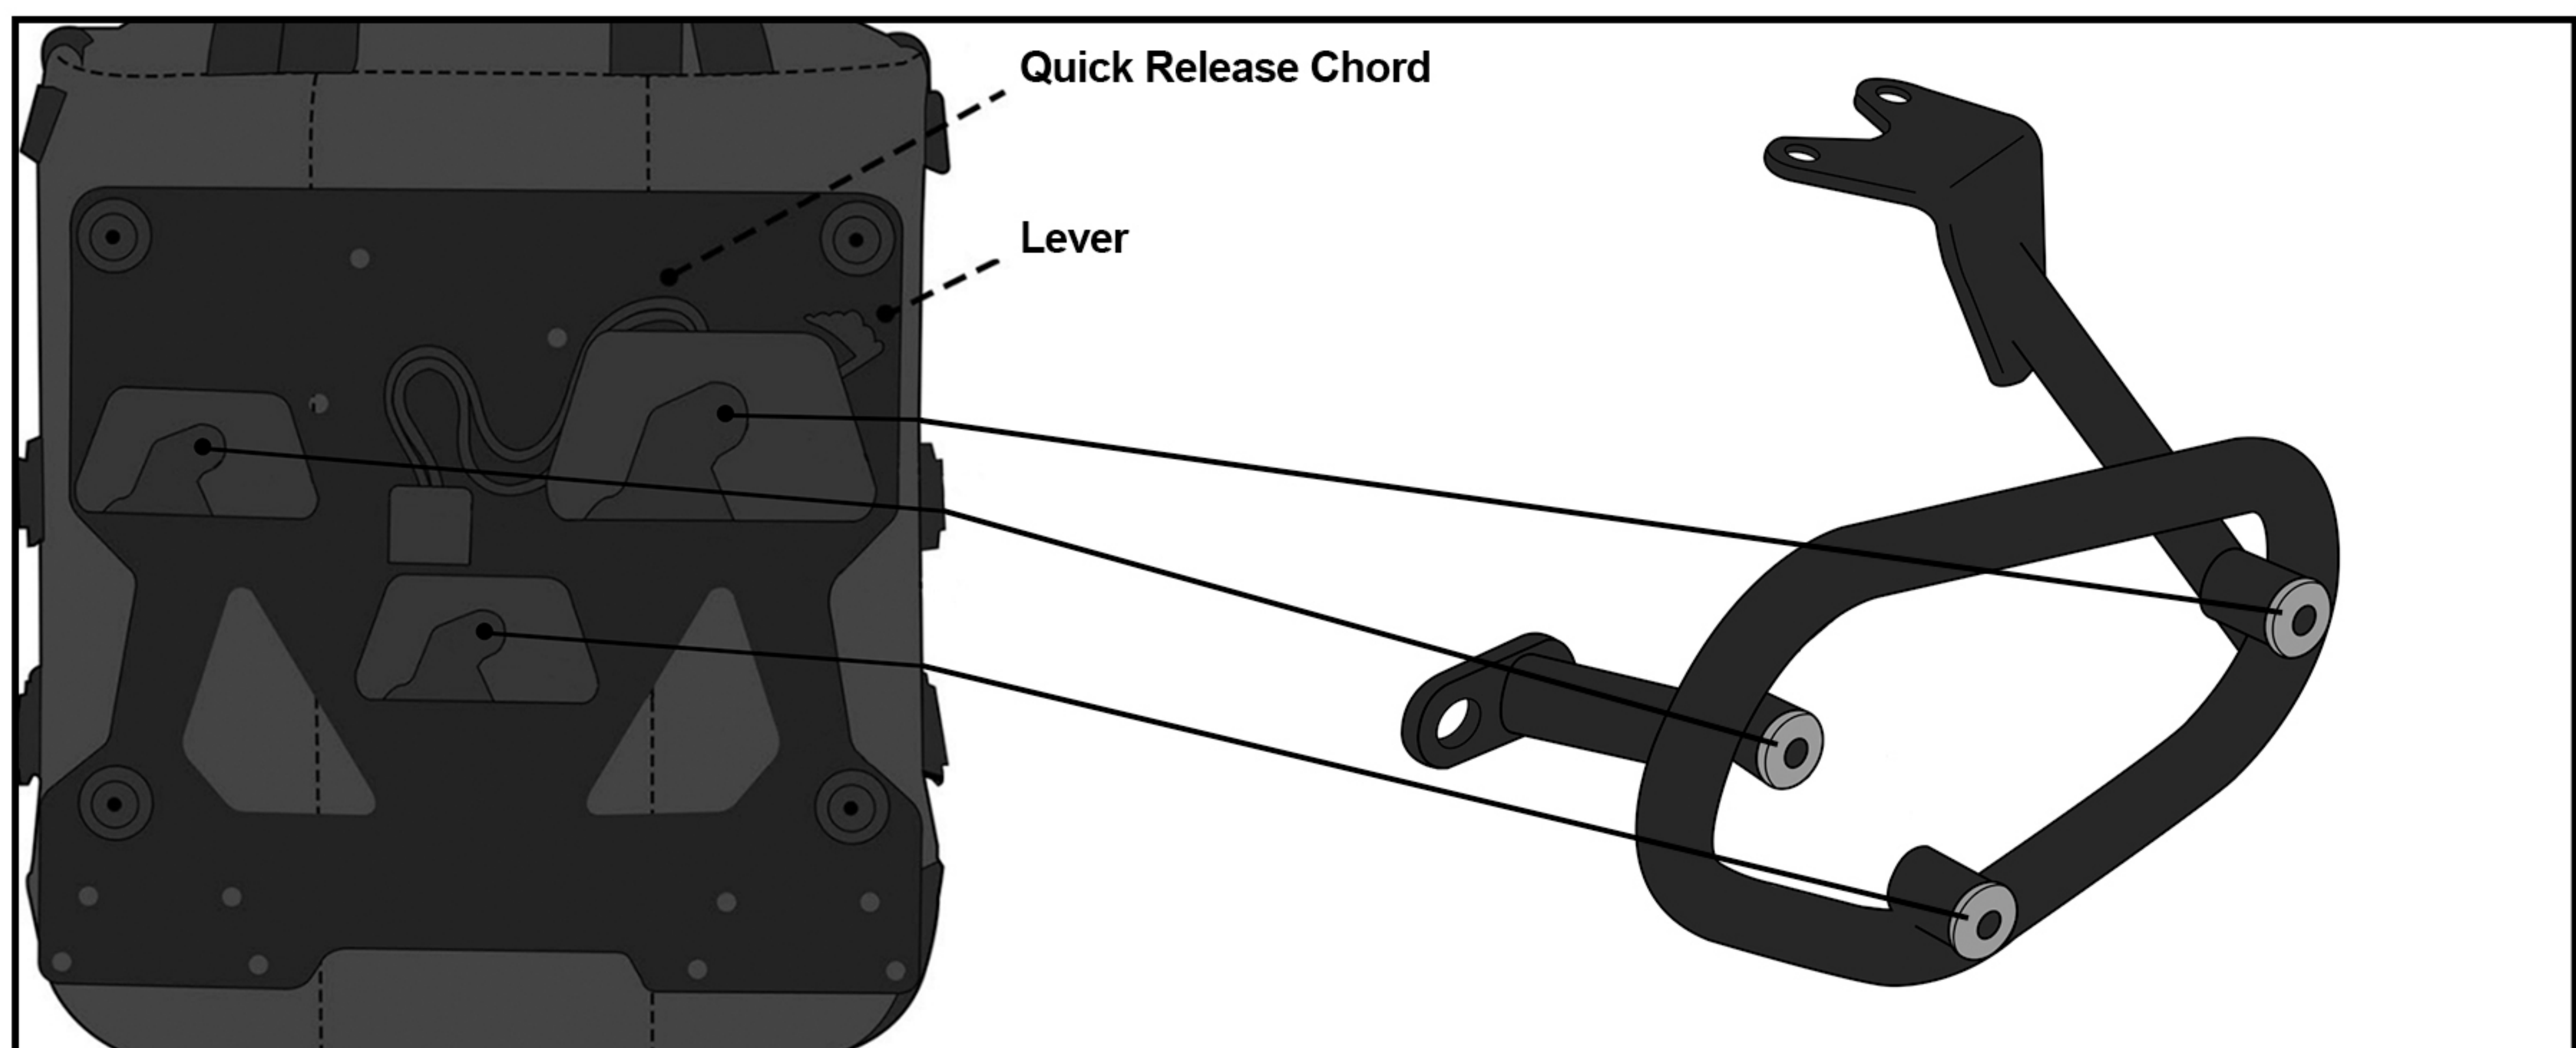


Fig 4. Attaching the Saddlebag

Tip:

The quick disconnect system is key lockable. Lock / unlock the quick disconnect system from inside the bag to secure your bag against theft.

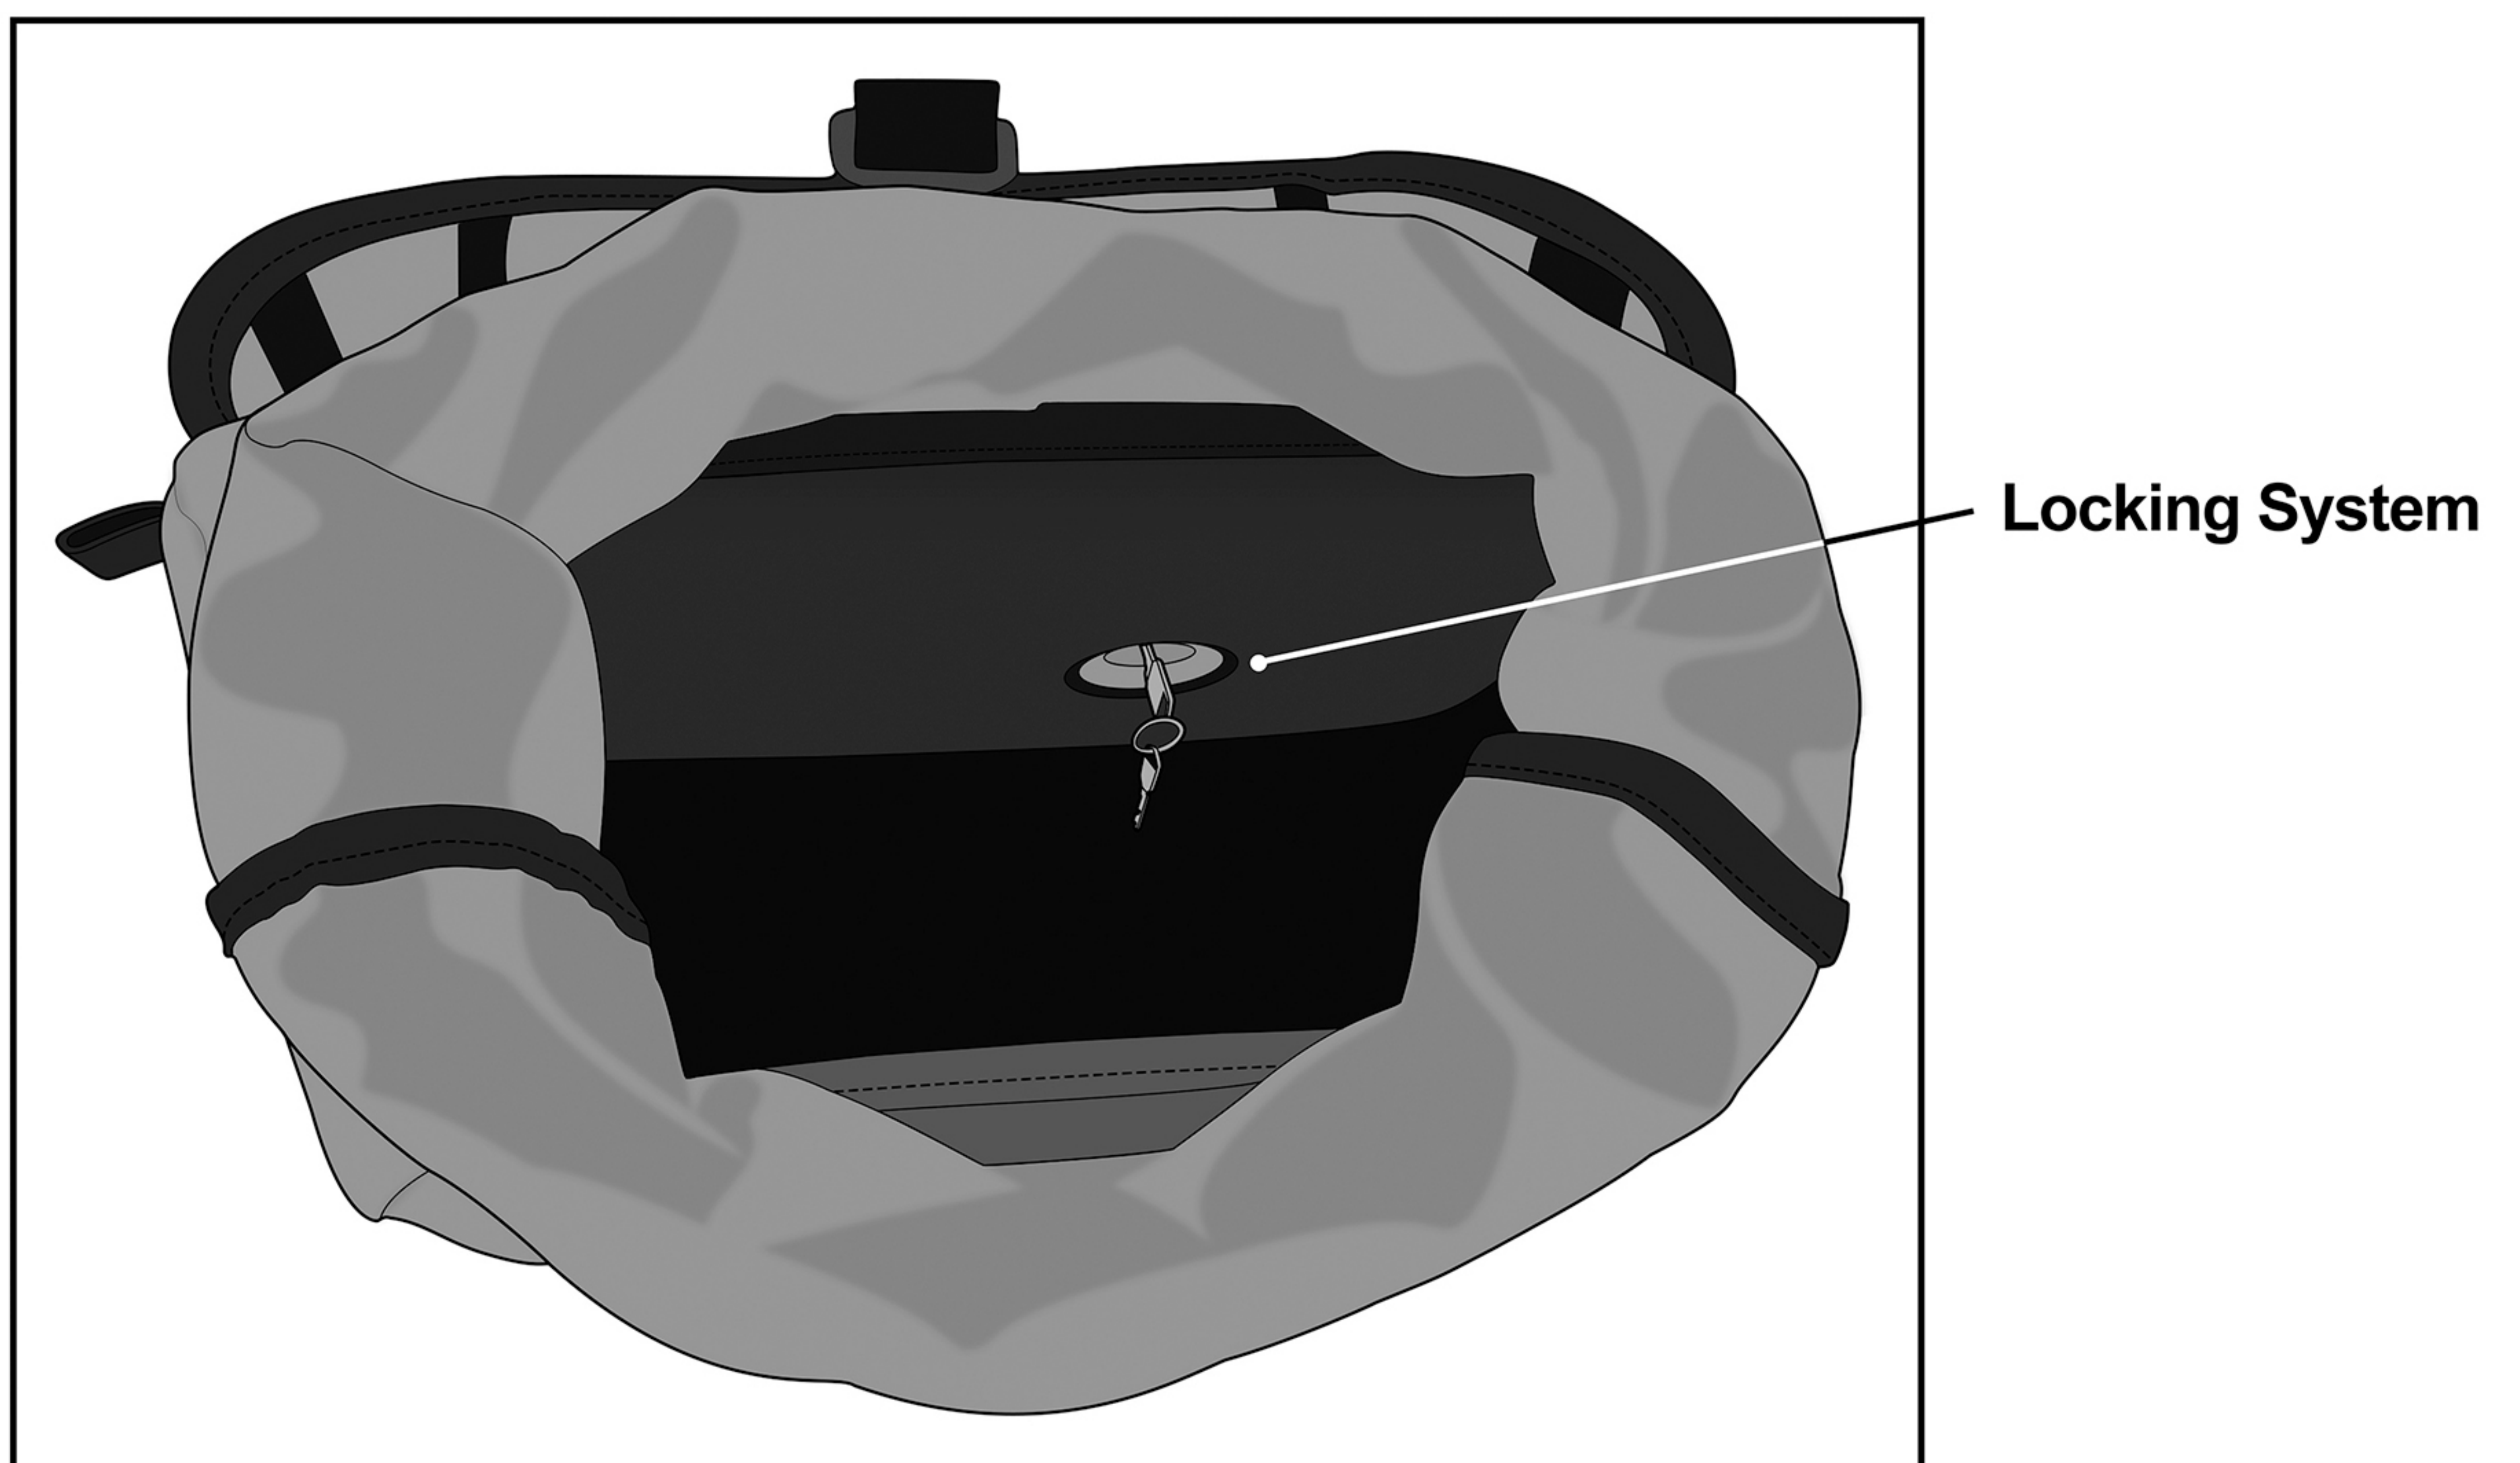

locking system located below the waterproof liner

Congratulations, your Viking Incognito Solo Bag is installed and you are ready to ride!

Warnings!

- Do not install if you are unsure about any of the installation steps.
- No part of the bag or mounting bracket should obstruct any of the moving parts of the bike such as the wheels or drive-train.
- Viking Bags is not responsible for any damage or injury caused by improper installation or use of the product.