INSTALLATION MANUAL



INSTALLATION INSTRUCTIONS FOR DYNA SISSY BARS

Parts Included

A. Sissy Bar

Note:

Your sissy bar mounts between the fender struts and the fender. Clean the fender thoroughly and use clear tape to prevent scratches during installation.

Step 1

Remove the 4 fender bolts (2 from each side). This will create space between the fender strut and the fender for the sissy bar mounting plates to slide in.

Step 2

Slide the mounting plates in carefully so that the four fender holes align with the holes in the mounting plates. (See Figure A.).

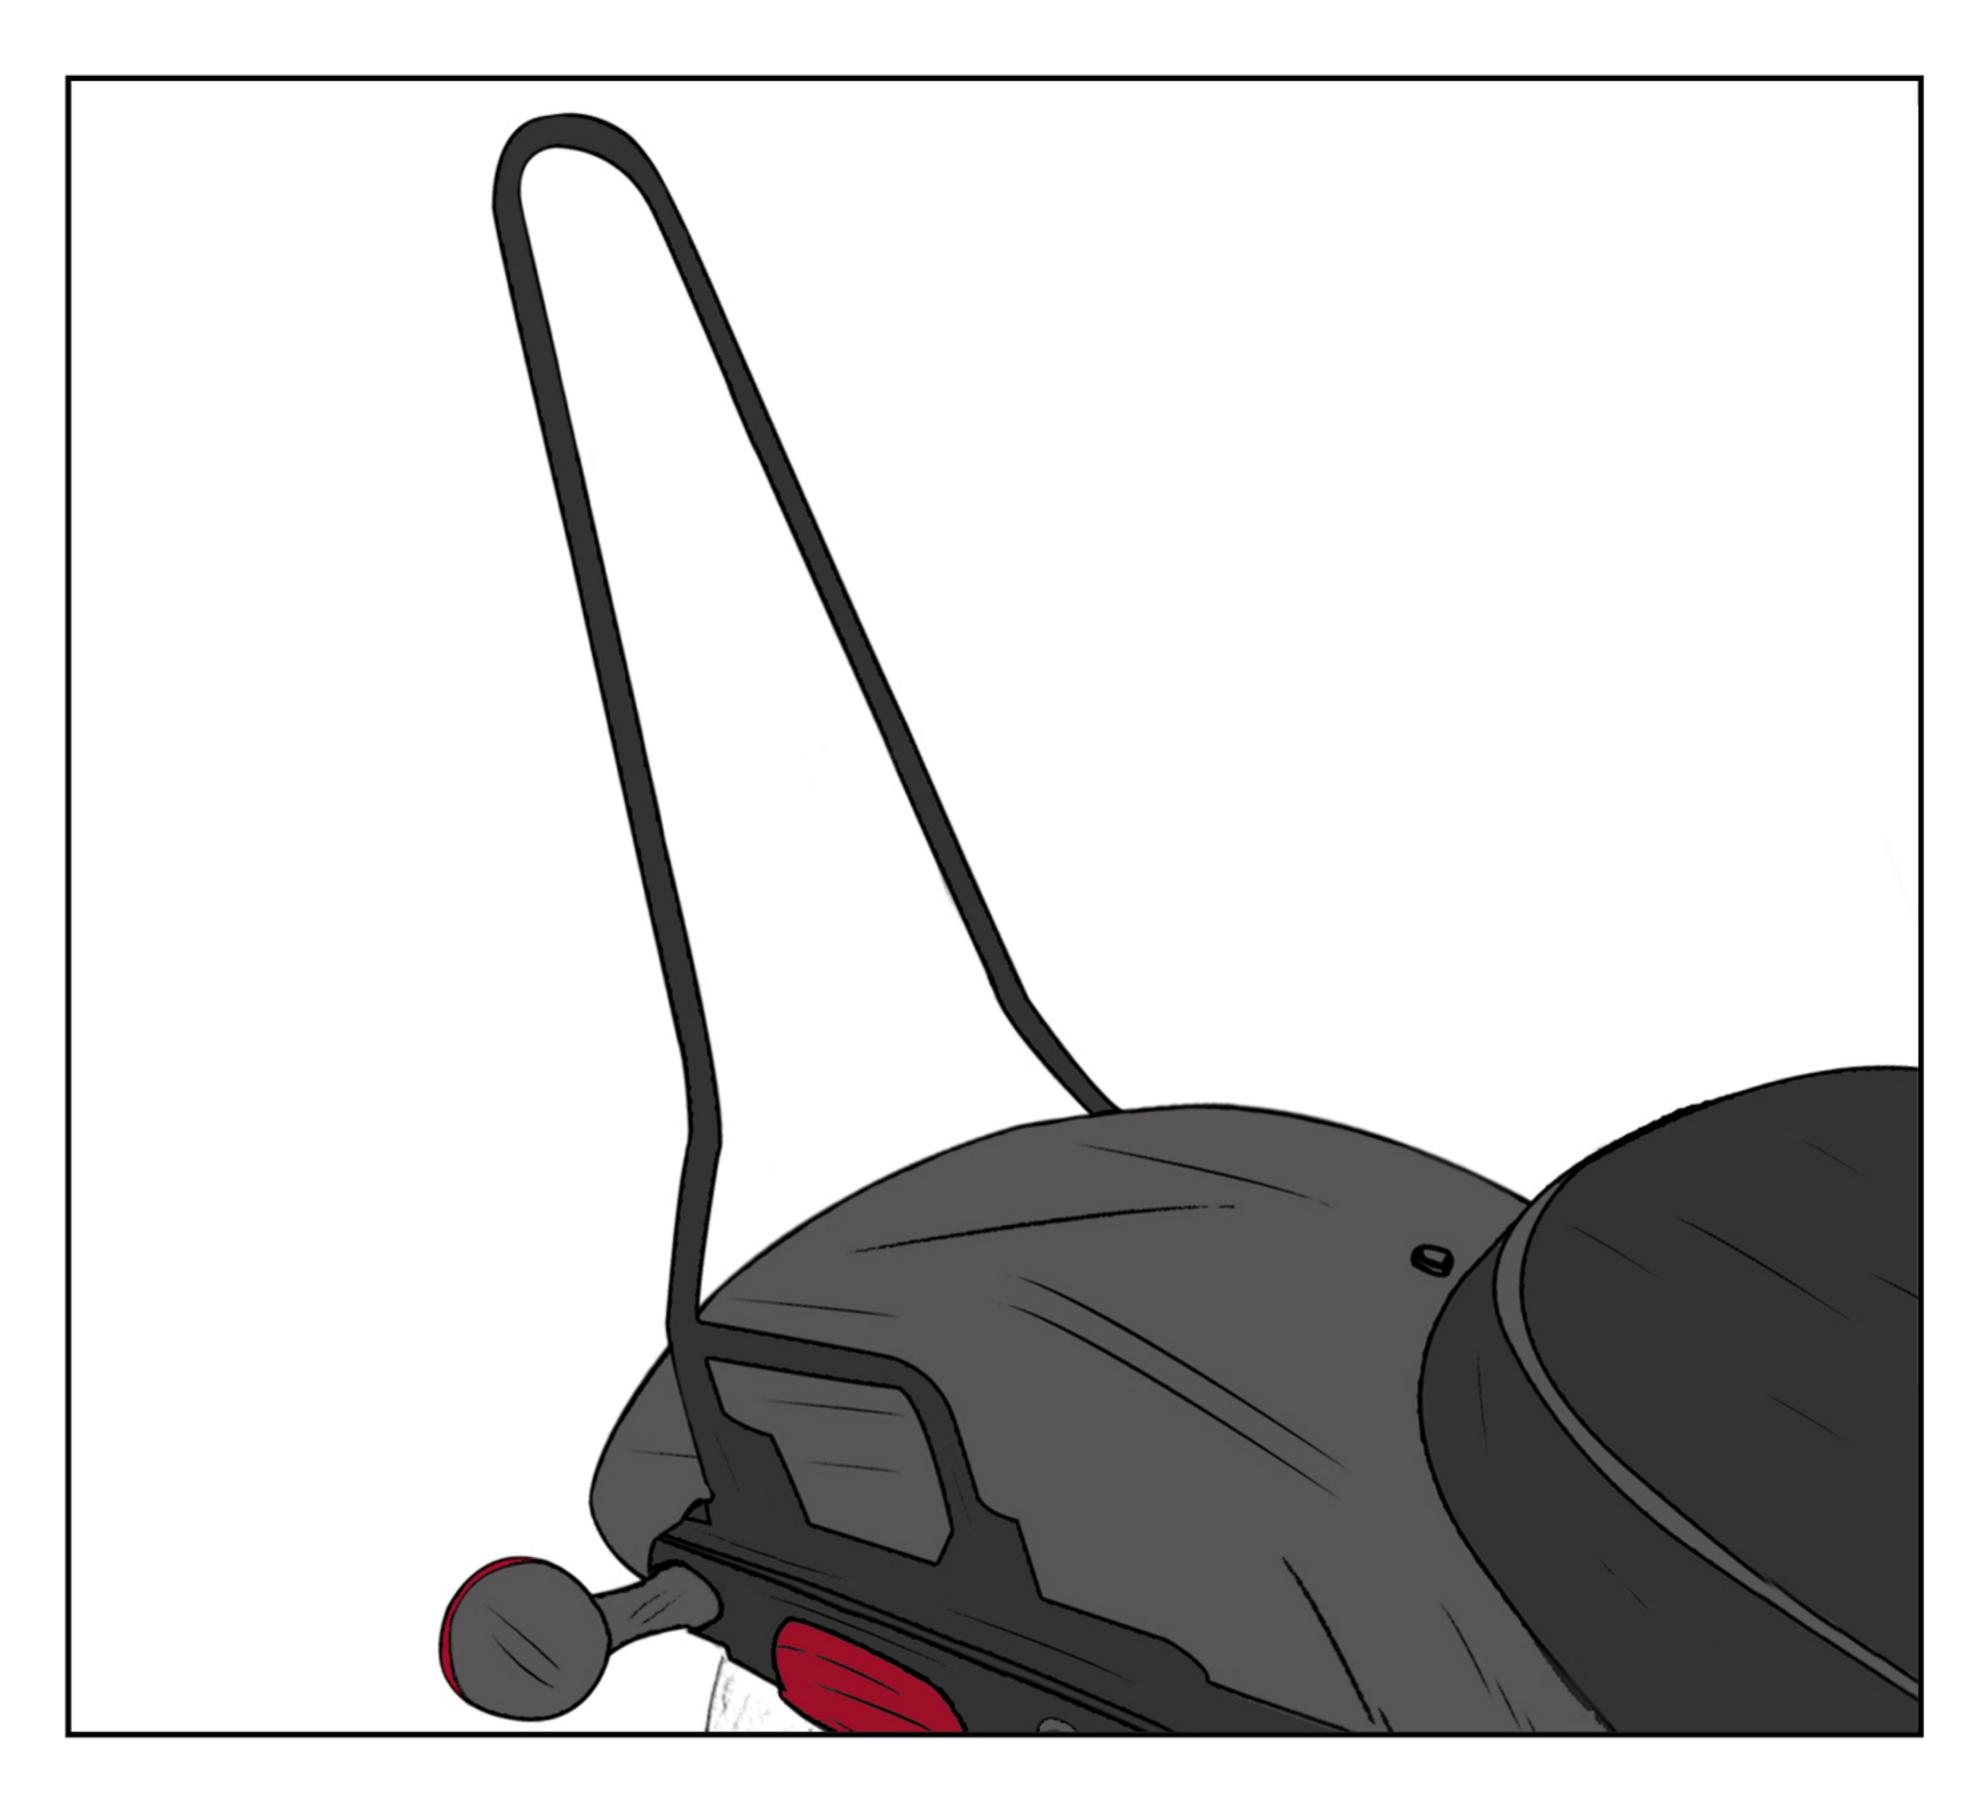


Fig A. Installed between Fender Strut and Rear Fender

Step 3

Once in place, reinsert the fender bolts and tighten loosely.

Step 4

Once all bolts are in place, tighten fully.

Warnings!

Do not install if you are confused about any of the installation steps.

Regularly check bolts to ensure they are firmly in place.

Viking Bags is not responsible for any damage or injury caused by improper use of any of the products.

We recommend you consult a certified mechanic before installation.