



# INSTALLATION INSTRUCTIONS

[www.vikingbags.com](http://www.vikingbags.com)



888-208-1949 |



[support@vikingbags.com](mailto:support@vikingbags.com)

## Installation Instructions for Viking Motorcycle Solo Seats

### Parts Included

Viking Motorcycle Solo Seat

### Instructions

#### Step 1

Removing your current seat:

1. Unscrew the rear fastener holding the seat to the fender. Keep the fastener as it will be used to install the new seat.
2. With the rear fastener removed, lift up the rear of the seat and pull backwards, disengaging the tab at the front of the seat.

#### Step 2 (If required)

Remove the OEM bolt under the seat (Fig A.) and replace it with a 5/16 x 1" bolt

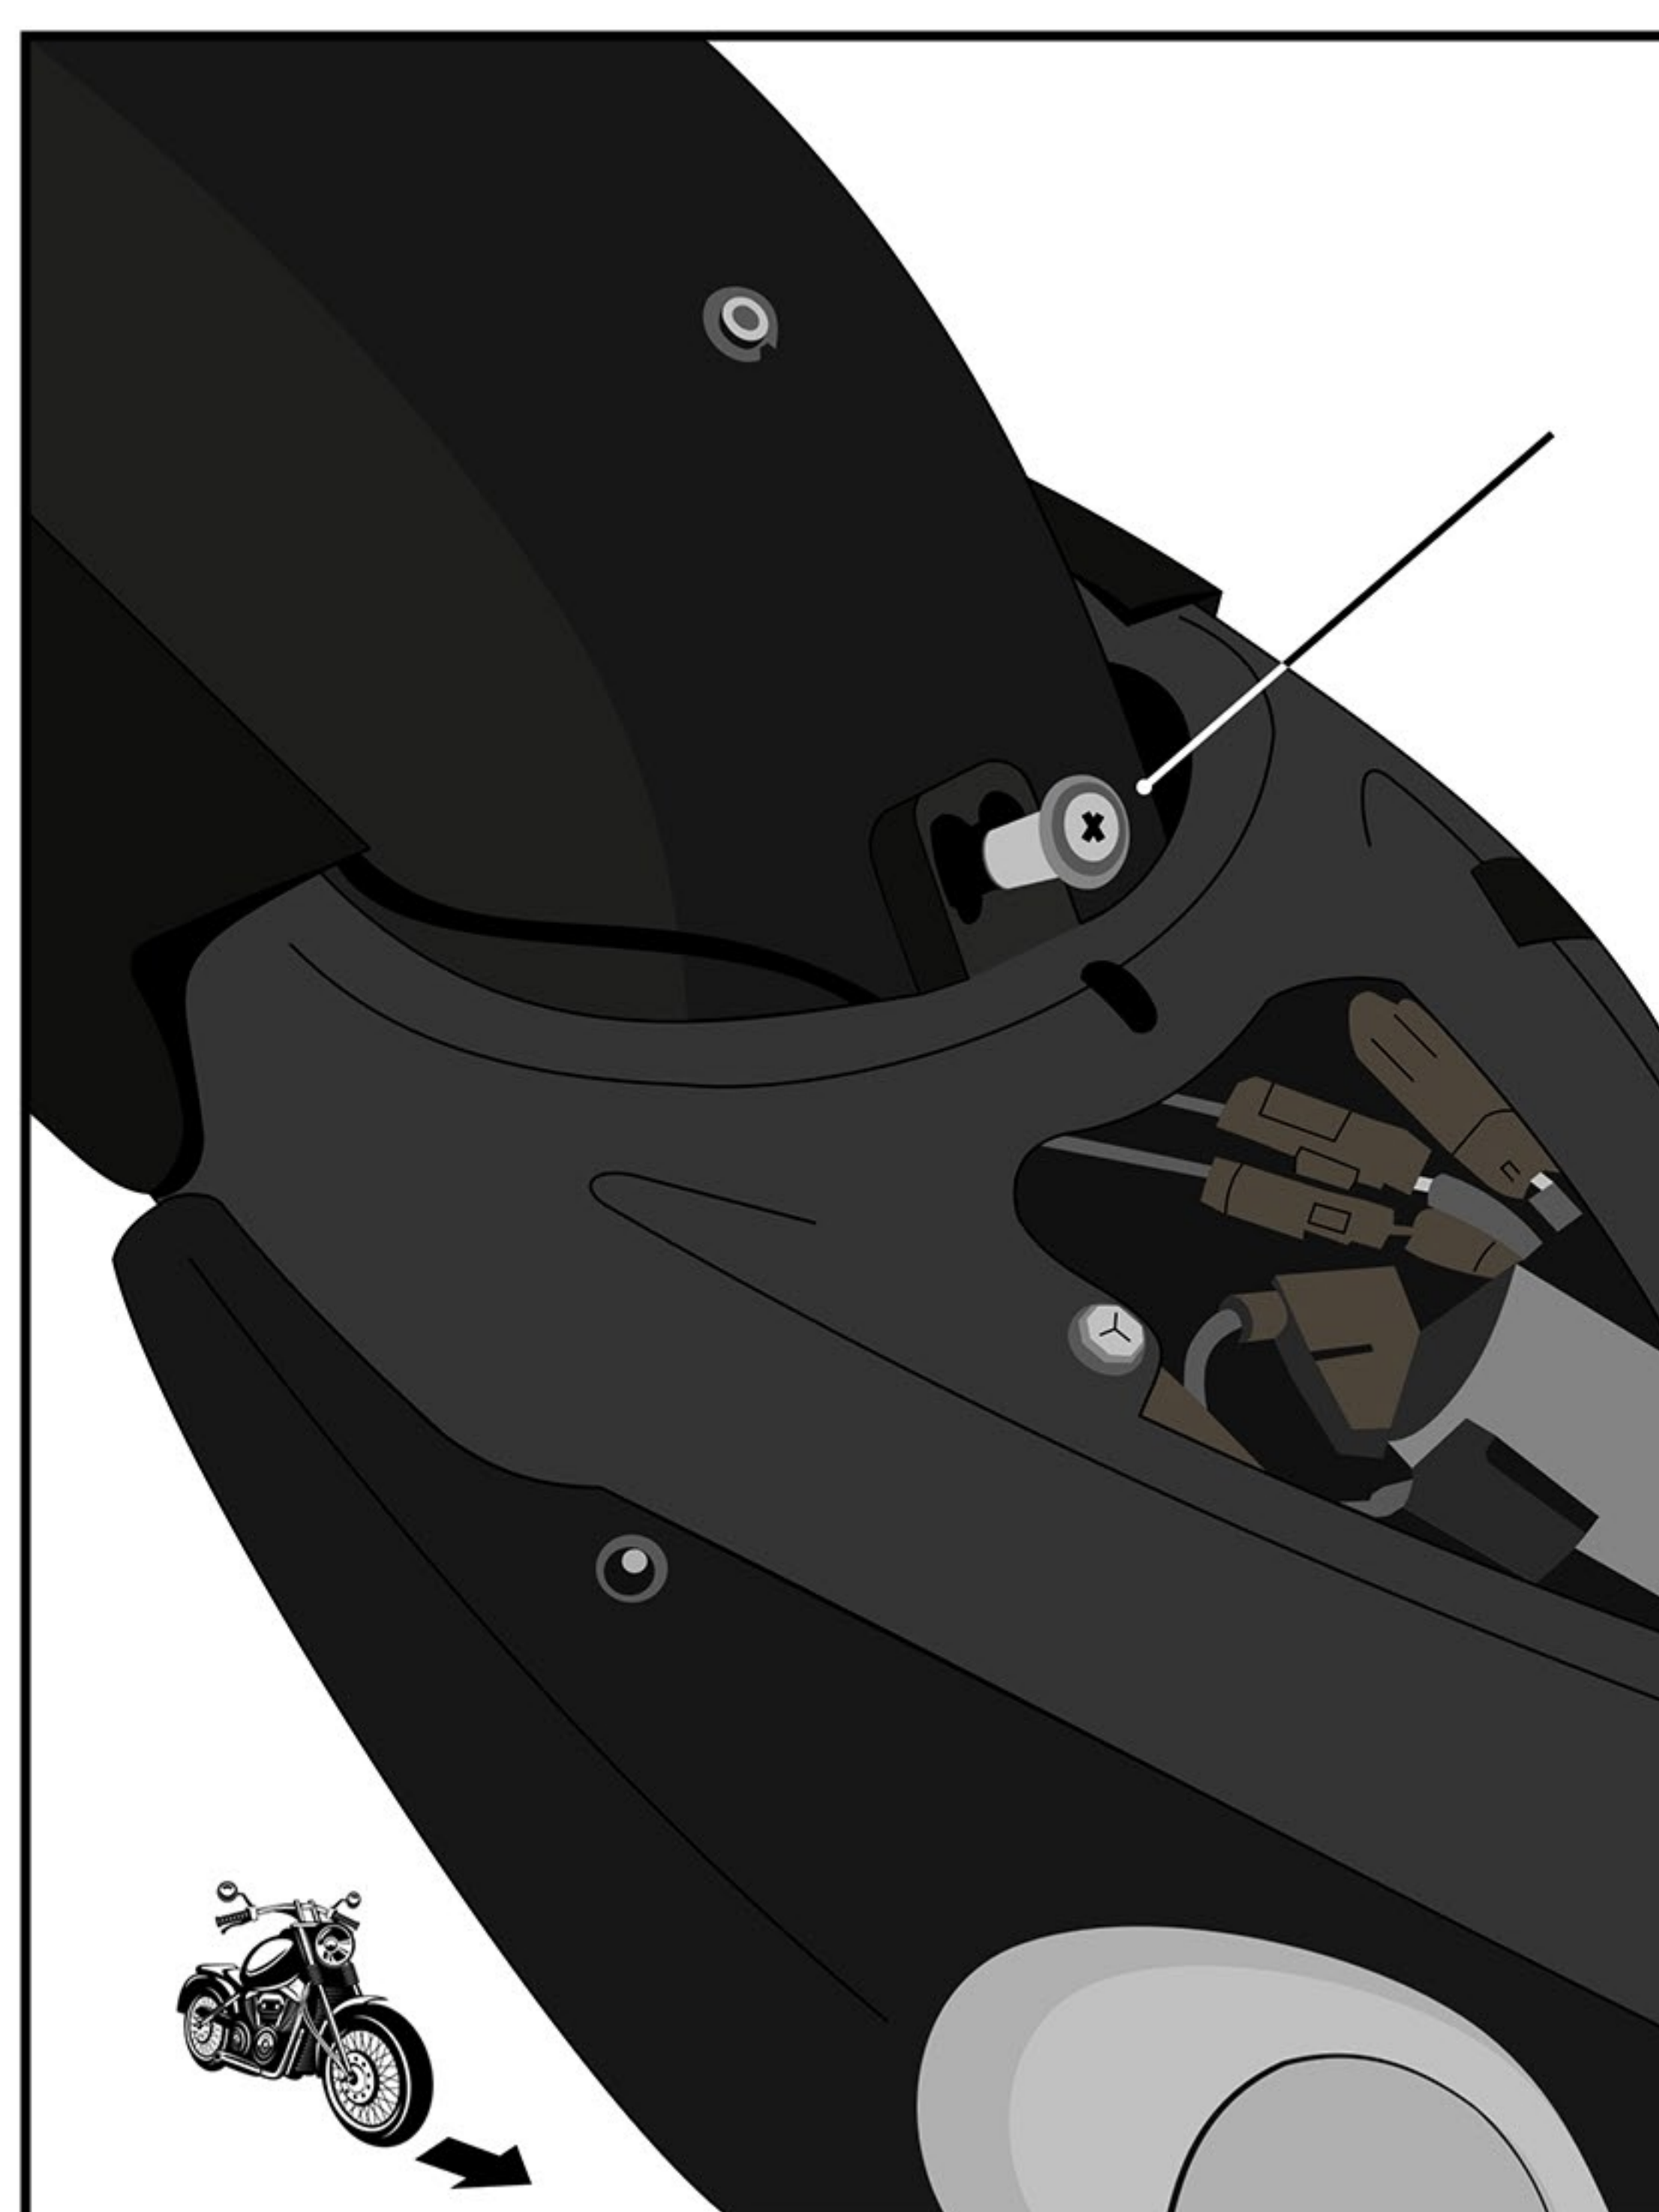


Fig (A) Remove the OEM bolt under the seat and replace it





# INSTALLATION INSTRUCTIONS

[www.vikingbags.com](http://www.vikingbags.com)



888-208-1949 |



[support@vikingbags.com](mailto:support@vikingbags.com)

## Step 3

### Installing Viking Seat:

1. Place the new seat on top of the bike and push the front tab underneath the slot in the frame so it engages.
2. Once in place, the rear hole in the seat should line up with the hole in the fender. With holes lined up, insert the fastener and tighten.
3. Check to ensure the seat is firmly in place and secured properly.

Front Tab Engaged

Rear Hole Installed

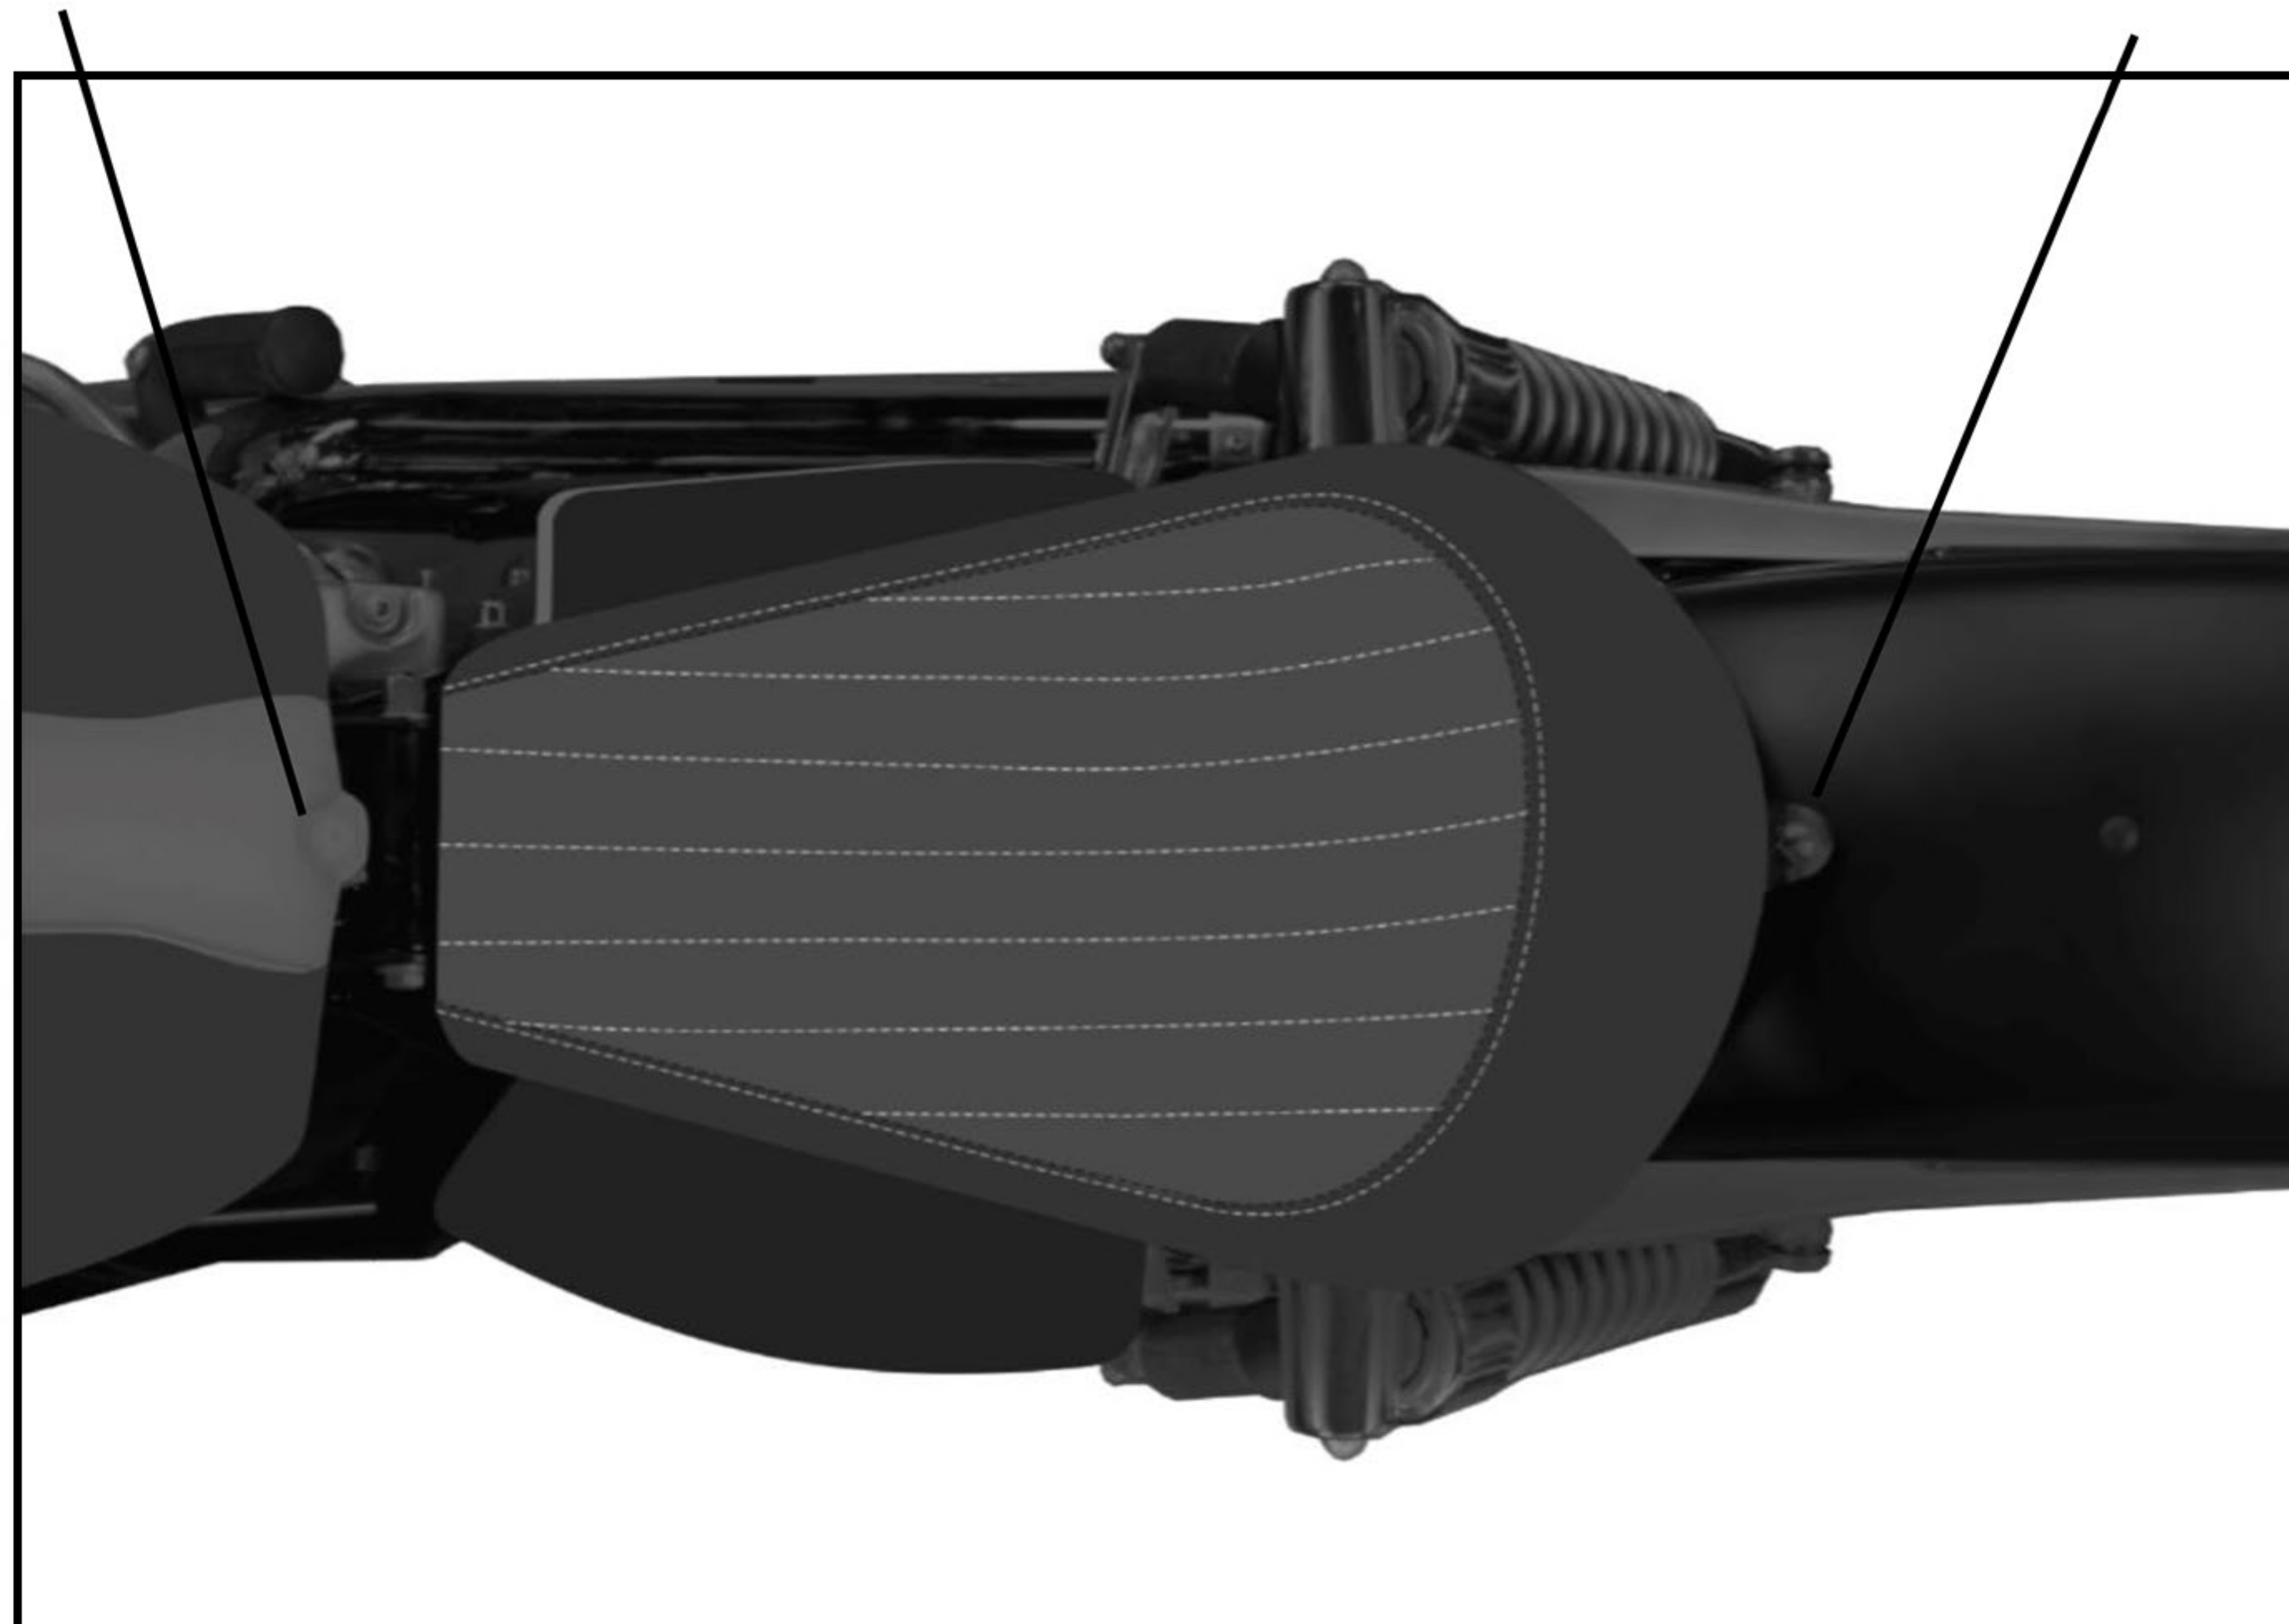


Fig (B) Installed Seat

### **Note**

Sportster fenders come up with multiple holes on top to cater for various seat sizes. Use the one which lines up with your new seat.

### **Warnings**

- ✓ Periodically check to see the seat is safely in place and the rear fastener is tight.
- ✓ Improperly installed seats or other parts can result in serious injury. Always consult a certified mechanic if there is any confusion regarding installation.
- ✓ Viking Bags will not be held responsible for any damage caused due to improper installation of any of our products.