

Installations Instructions

www.vikingbags.com | 888-208-1949 | support@vikingbags.com


Parts List

- 1- Sissy Bar Bag
- 2- Top Roll Bag
- 3- Rain Cover
- 4- Mounting Straps
- 5- Installation Instructions




Step 1

With bag siting on a luggage rack or passenger seat, loosen Velcro straps. With straps passing through "D" ring, slide over your backrest using as many accommodate. Pull to tighten and lay the straps back onto itself, fastening eith Velcro.

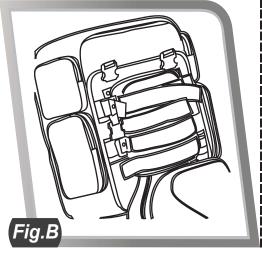

Step 2

Each bag also has two quick nylon straps, one located on either side of the bag. These straps must clip into the co responding buckles on each side of the bag, and rap around secure, solid part of the motorcycle like a saddlebag support, frame rail, etc. Once all of the straps are connected, the bag should not move around while the motorcycle is operating.

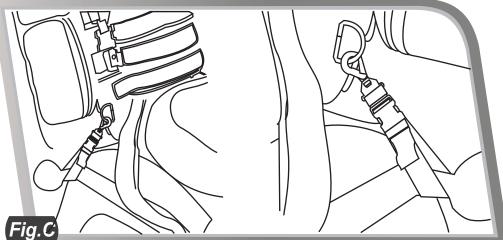

Warnings

Do not use this bag if any part of the mounting system has deteriorated loosened or is beginning to fail. If you have any doubts as to the security of bag's installation, stop using it.

After every stop check the bag to be certain that it did not shift while riding and verify that the straps will not contact or interfere with any part of the drive train, suspension, brackets or wheels.

Don not exceed 15 pounds total weight of bag. Contents and attachment or the load limits of the motorcycle as specified in the owner's manual supplied with the bike or from the bike manufacture.

Don not exceed 15 pounds total weight of bag. Contents and attachment or the load limits of the motorcycle as specified in the owner's manual supplied with the bike or from the bike manufacture.

Always removed or stow all shoulder and backpack straps before attaching bag to motorcycle.