



INSTALLATION INSTRUCTIONS

www.vikingbags.com



888-208-1949 |




support@vikingbags.com

VIKINGBAGS ARMOR STUDDED MOTORCYCLE TOOL BAG INSTRUCTION



Parts List

1. Tool Bag
2. Nylon Straps x 2
3. Installation Instruction

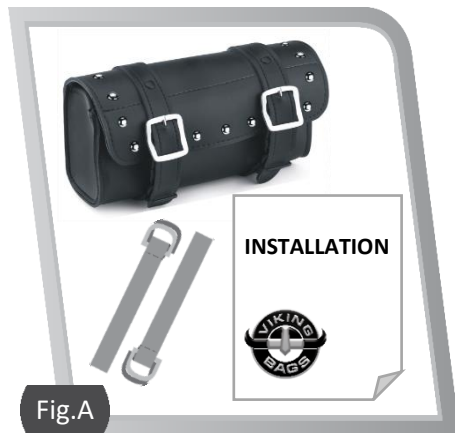

Installation

- One or two straps can be used to attach the bag to the motorcycle depending on application.
- Insert the straps into each of the square anchors located on the back of the bag, straps can be inserted either vertically or horizontally to best suit your mounting location. See Fig. B. A
- For traditional handlebar mount, use two straps around the handlebars, with the bag in front of the handlebars. Make sure to tighten both straps securely so bag dose nit move around while riding.

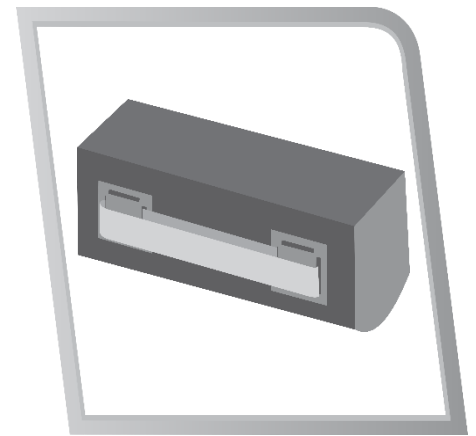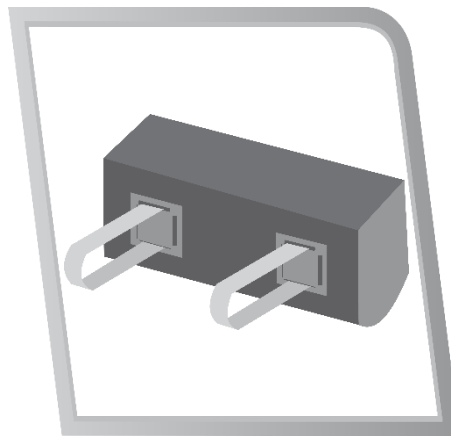

D-Ring

When you place the tool bag in the correct position, tighten the nylon safety straps using the adjustable D-rings (See Figure C).

