

Honda Rebel 500 ABS Battle Axe Motorcycle Sissy Bar with Backrest:




Parts:

- i Sissy Bar with Backrest x 1
- ii Right Sidearm x 1
- iii Left Sidearm x 1
- iv Socket Head Cap Bolt 25mm x 4
- v Socket Head Cap Bolt 20mm x 4
- vi Plastic Washer x 4
- vii Steel washer x 8

Instructions:

Step 1

Use a 6mm Hex Wrench to remove the fender strut bolts (2 from each side)

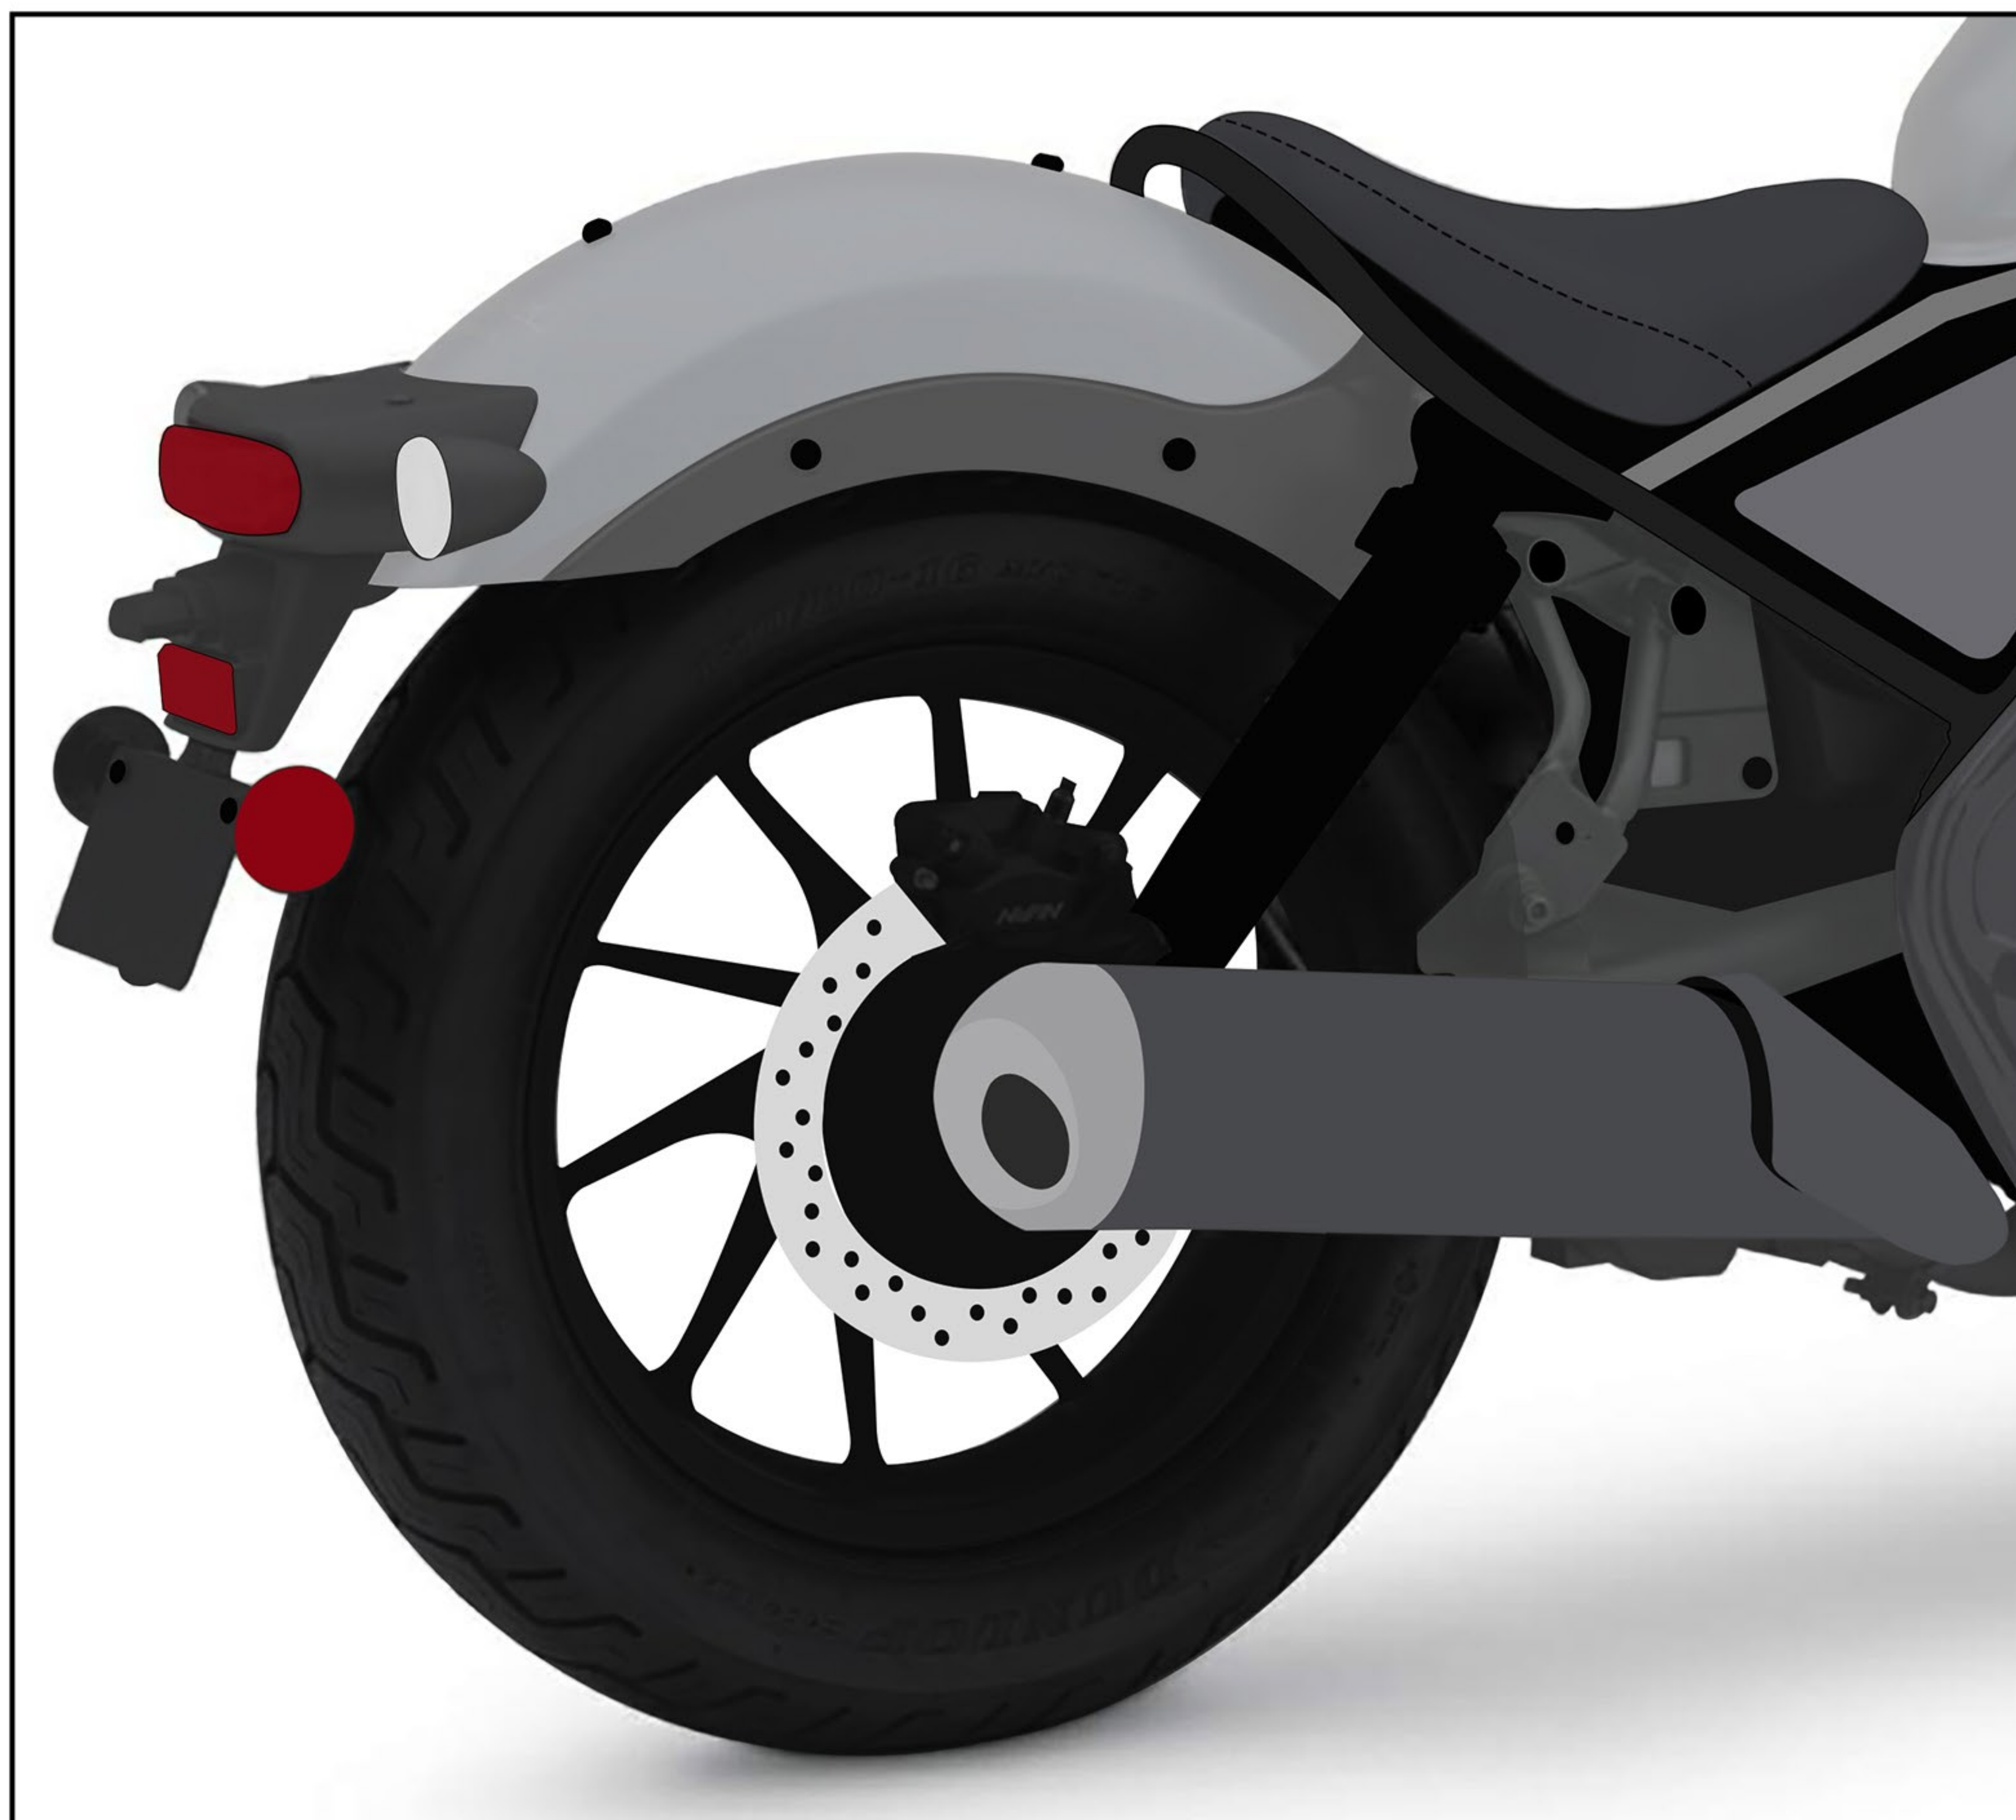

Step 2

Hold the left sidearm to ensure the holes in the sidearm align with the fender holes on your bike.

Step 3


Place the Plastic Washer between the left sidearm and the fender for paint protection. Then run the Socket Head Cap Bolt (25mm) through the left sidearm with the steel washer in between (See Fig 1.)

Step 4


Repeat the same process on the right

Step 5

Once the sidearms are installed, now fasten the sissy bar between the sidearms by running the Socket Head Cap Bolt (20mm) with the steel washers in between (See Fig 2.). Do this step for both sides.

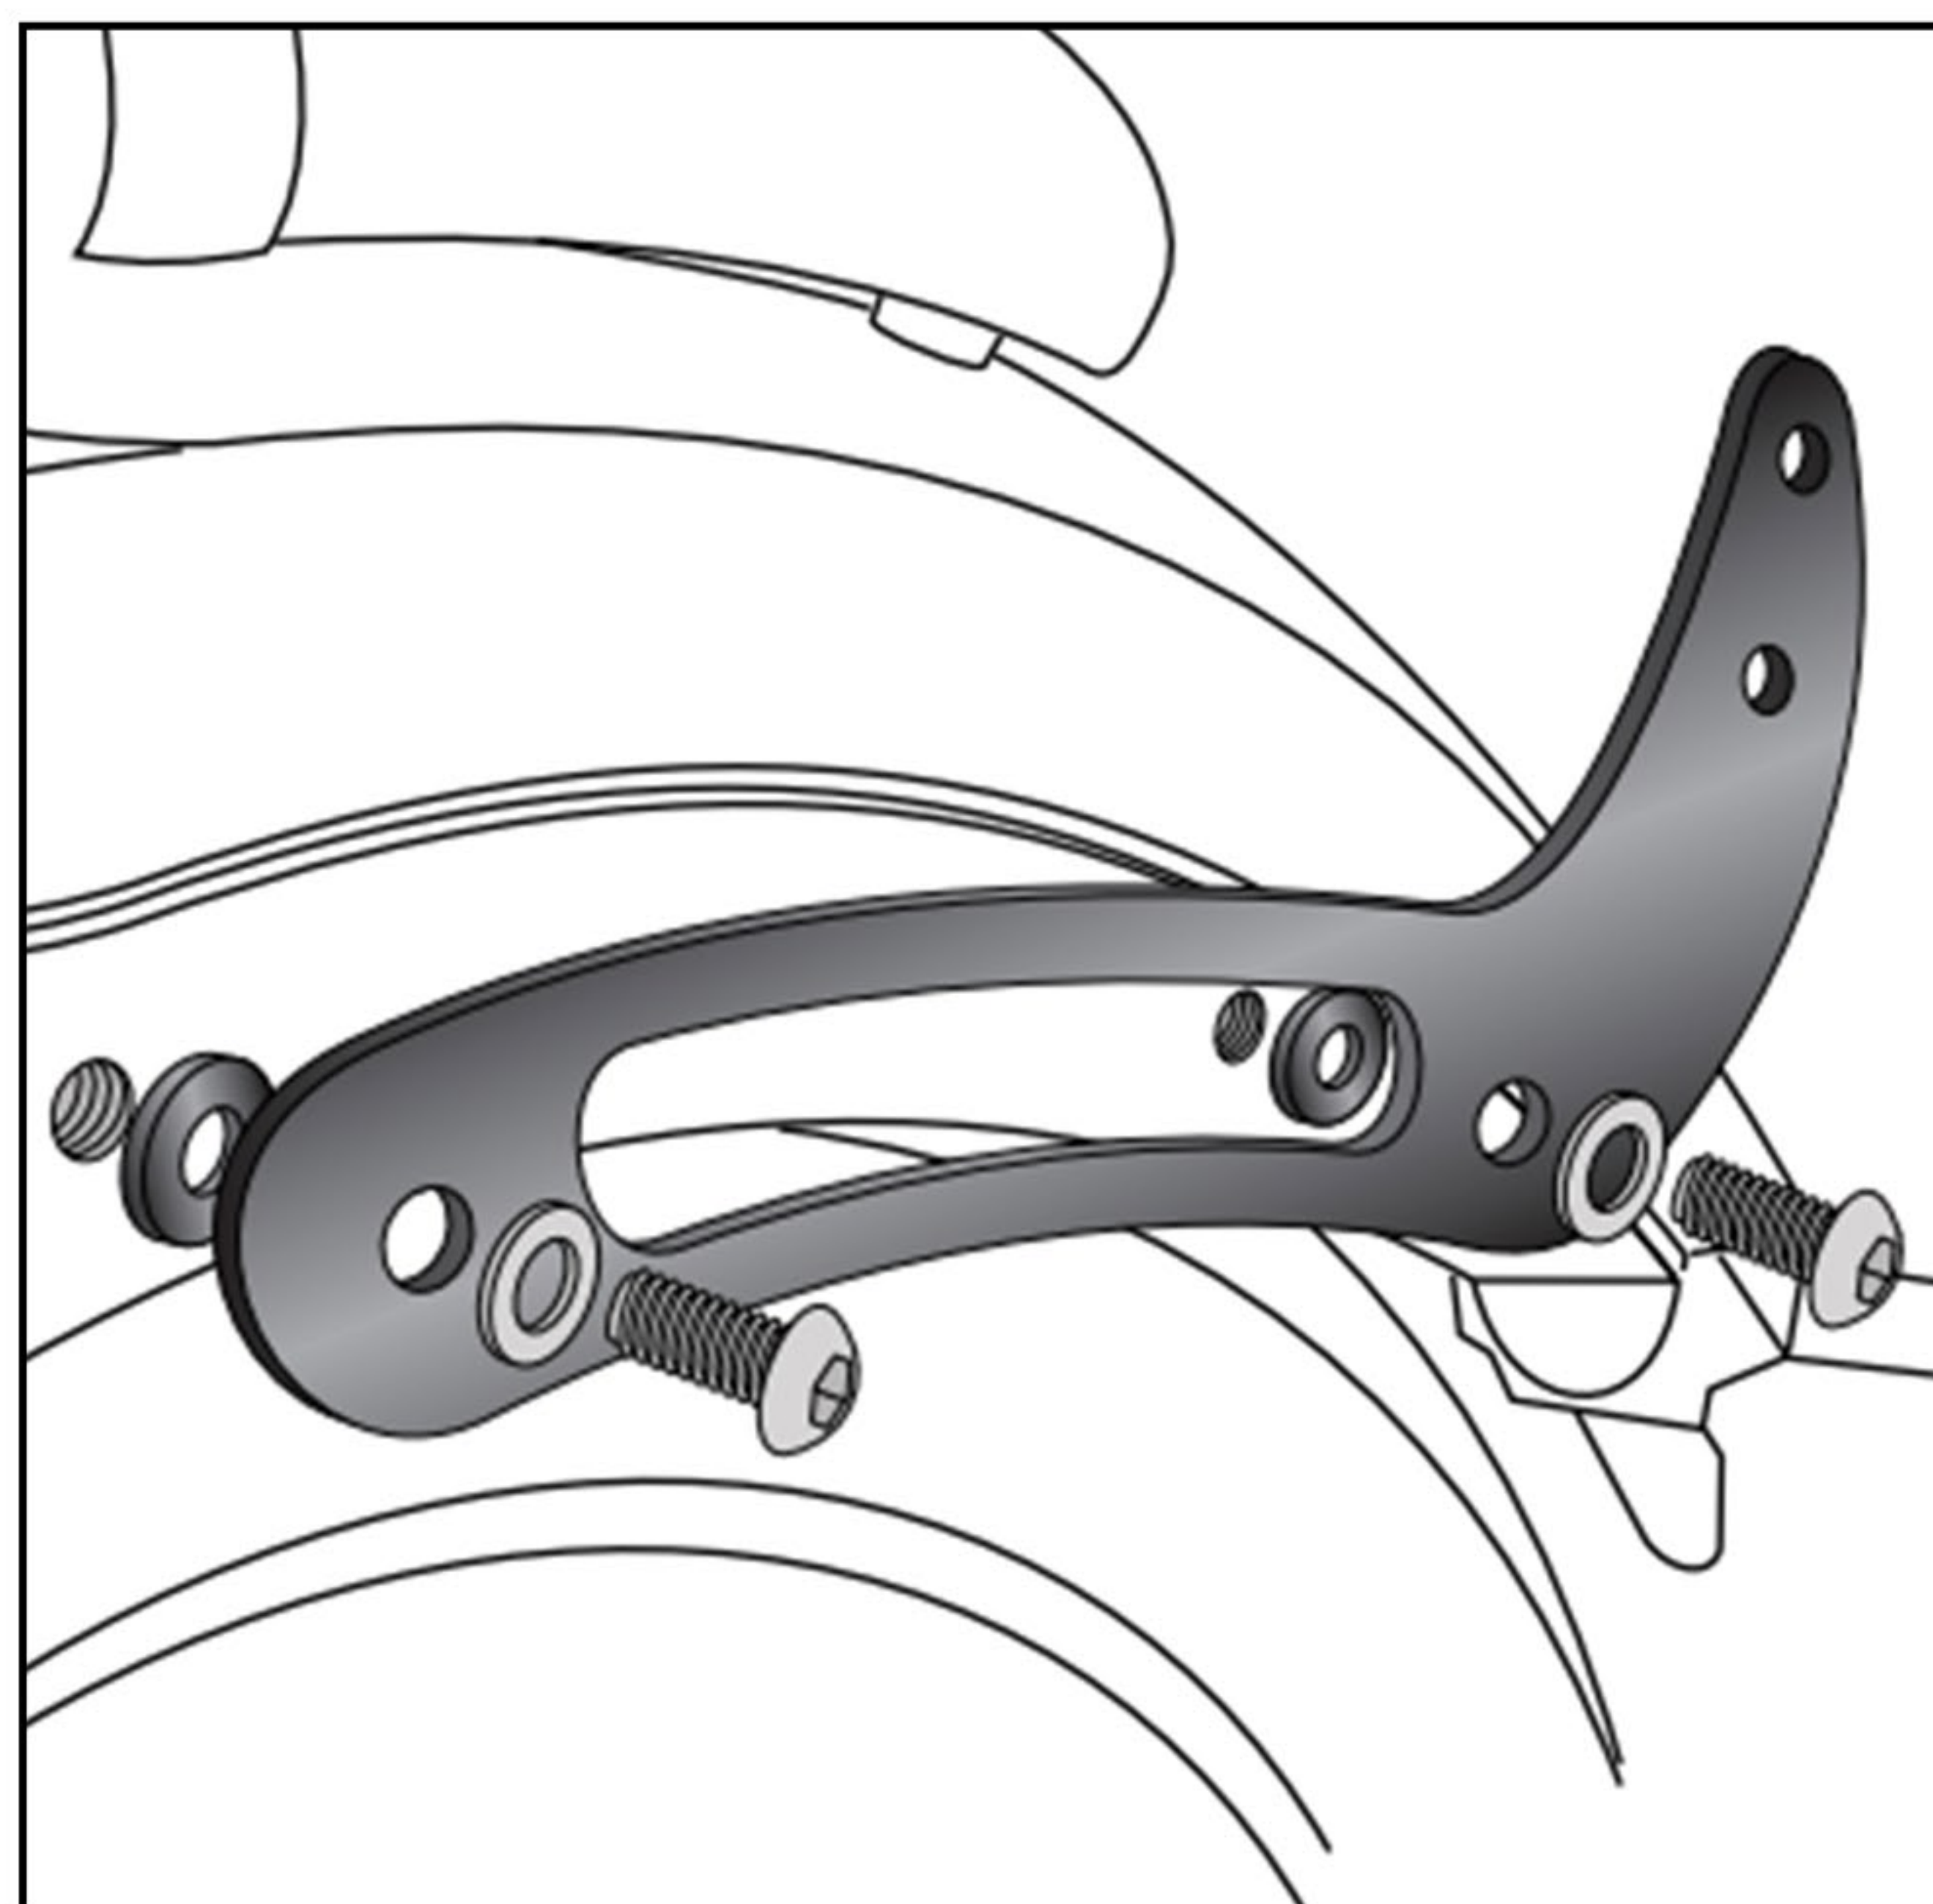

(Fig 1)

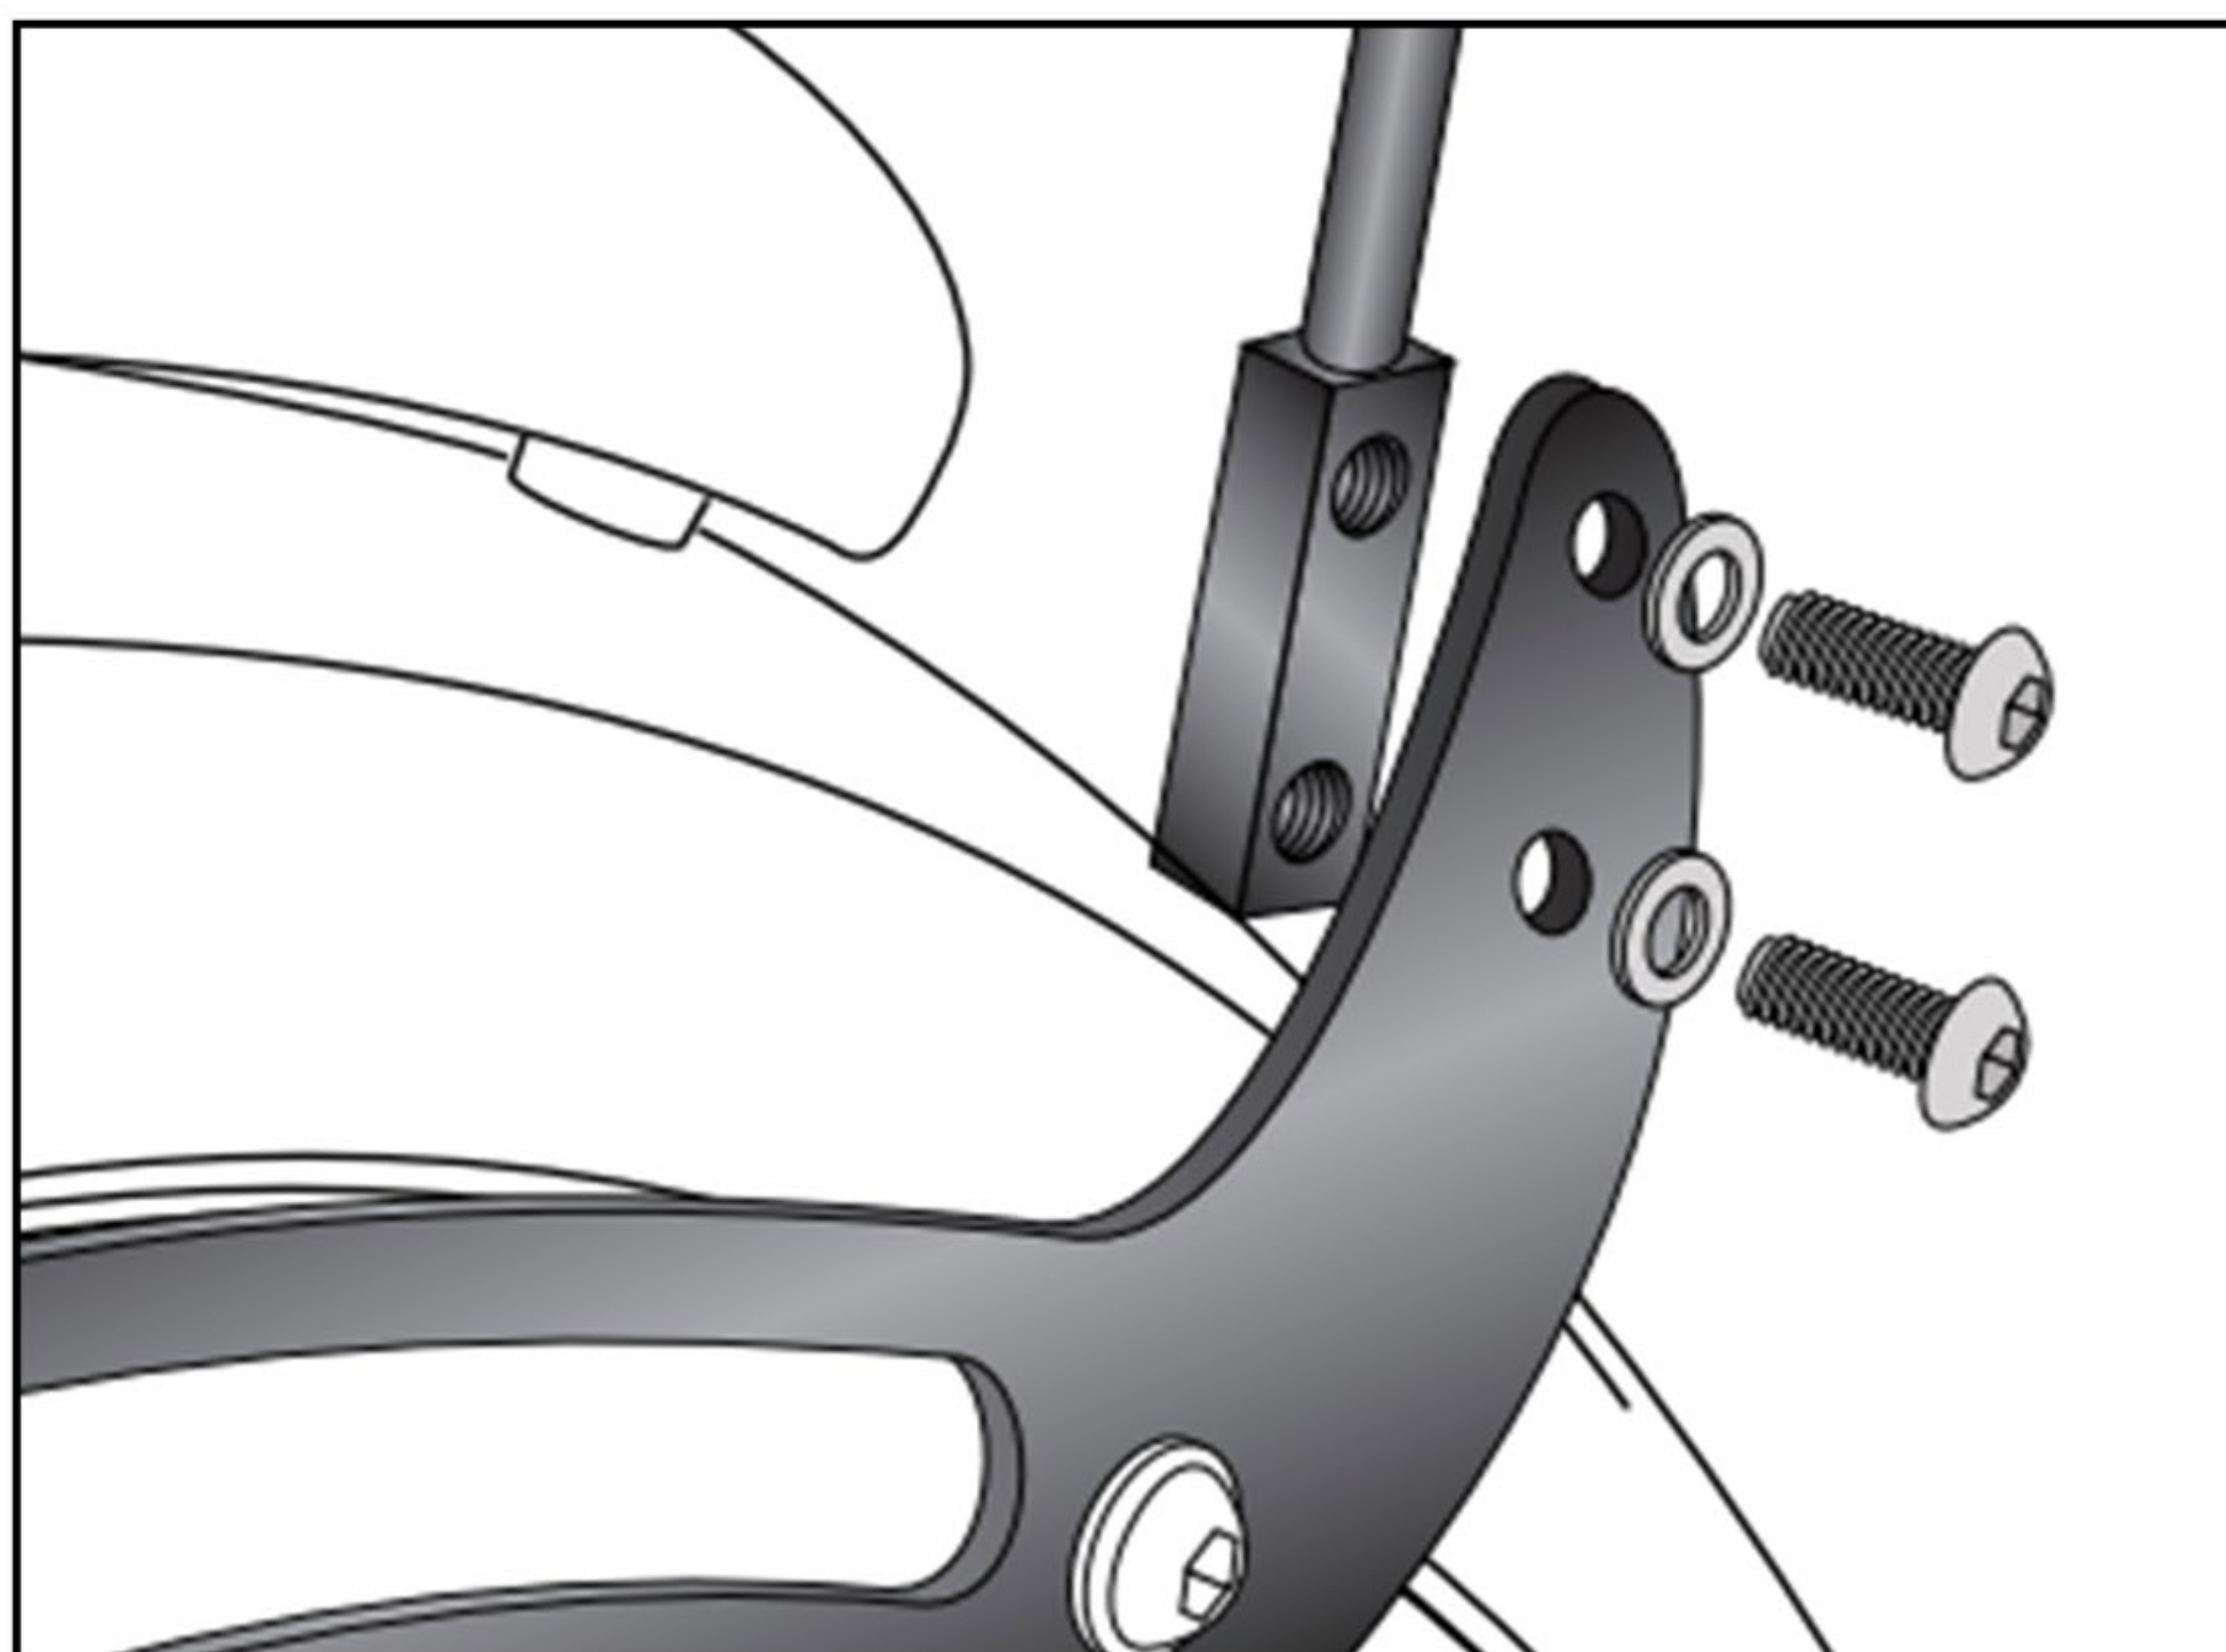

(Fig 2)

Congratulations! Your Honda Rebel 500 Battle Axe Motorcycle Sissy Bar with Backrest is mounted and you are ready to ride!

Warnings !

- Check all screw connections after the installation for tightness.
- It is important to note that if you do not mount the sissy bar properly damage may be caused to the motorcycle.
- In case you are unsure about your ability to install the racks securely, please seek assistance from a qualified mechanic.