

# Yamaha Bolt Battle Axe Motorcycle Sissy Bar with Backrest:



## Parts:


- i Sissy Bar x 1
- ii Backrest x 1
- iii Right Sidearm x 1
- iv Left Sidearm x 1
- v Head Bolts x 3 (For sissy bar pad)
- vi Button Head Allen Bolts x 4 (To attach side arms to the sissy bar)
- vii Hex Bolts 76mm x 4 (For Rear Fender)
- viii Flat Washer x 4
- ix Thick Washer x 4

## Instructions:

### Step 1

Use a wrench to remove the back fender strut bolts (2 from each side) (See Fig 1.)

The four bolts you removed will be replaced by the Hex bolts (76 mm) that came with the included hardware. (See Fig 2.)

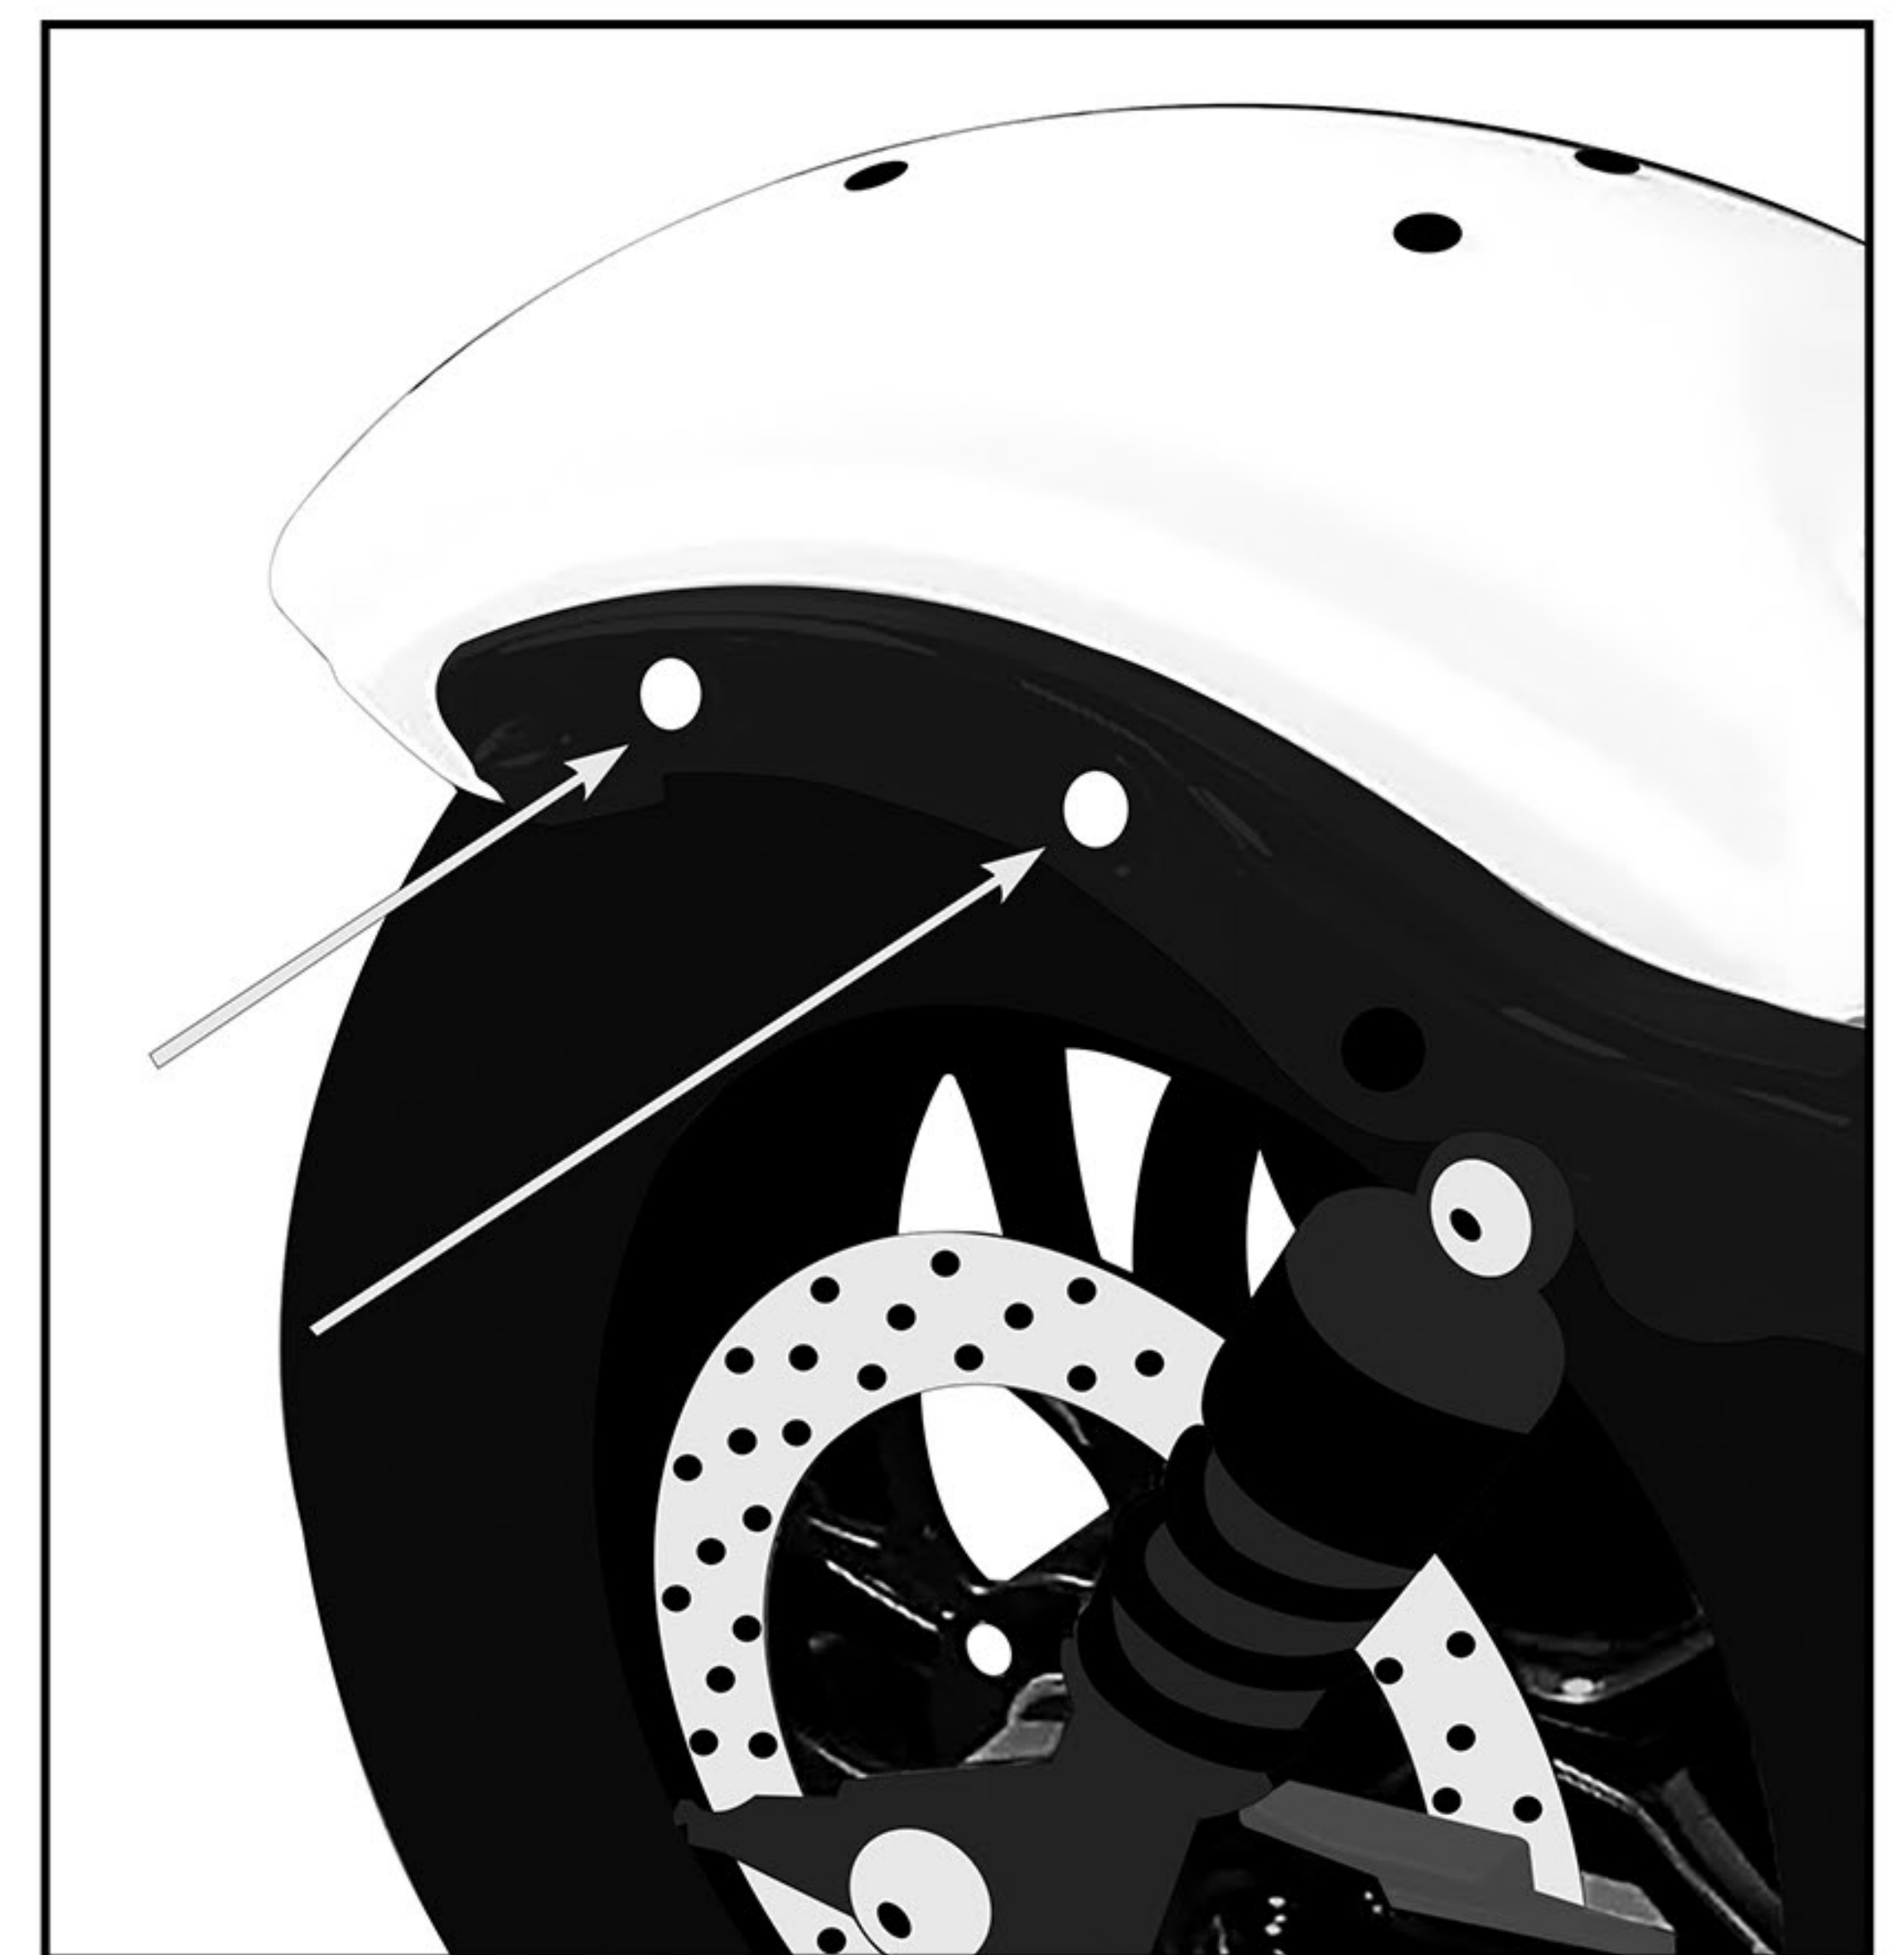


(Fig 1)

### Step 2

Hold the right sidearm to ensure the holes in the sidearm align with the fender holes on your bike.

### Step 3


It is better if you get a helping hand for this step. Place the thicker washers on to the bolt point, then run the hex bolts through the left sidearm with the flat washers in between. (See Fig 3.)

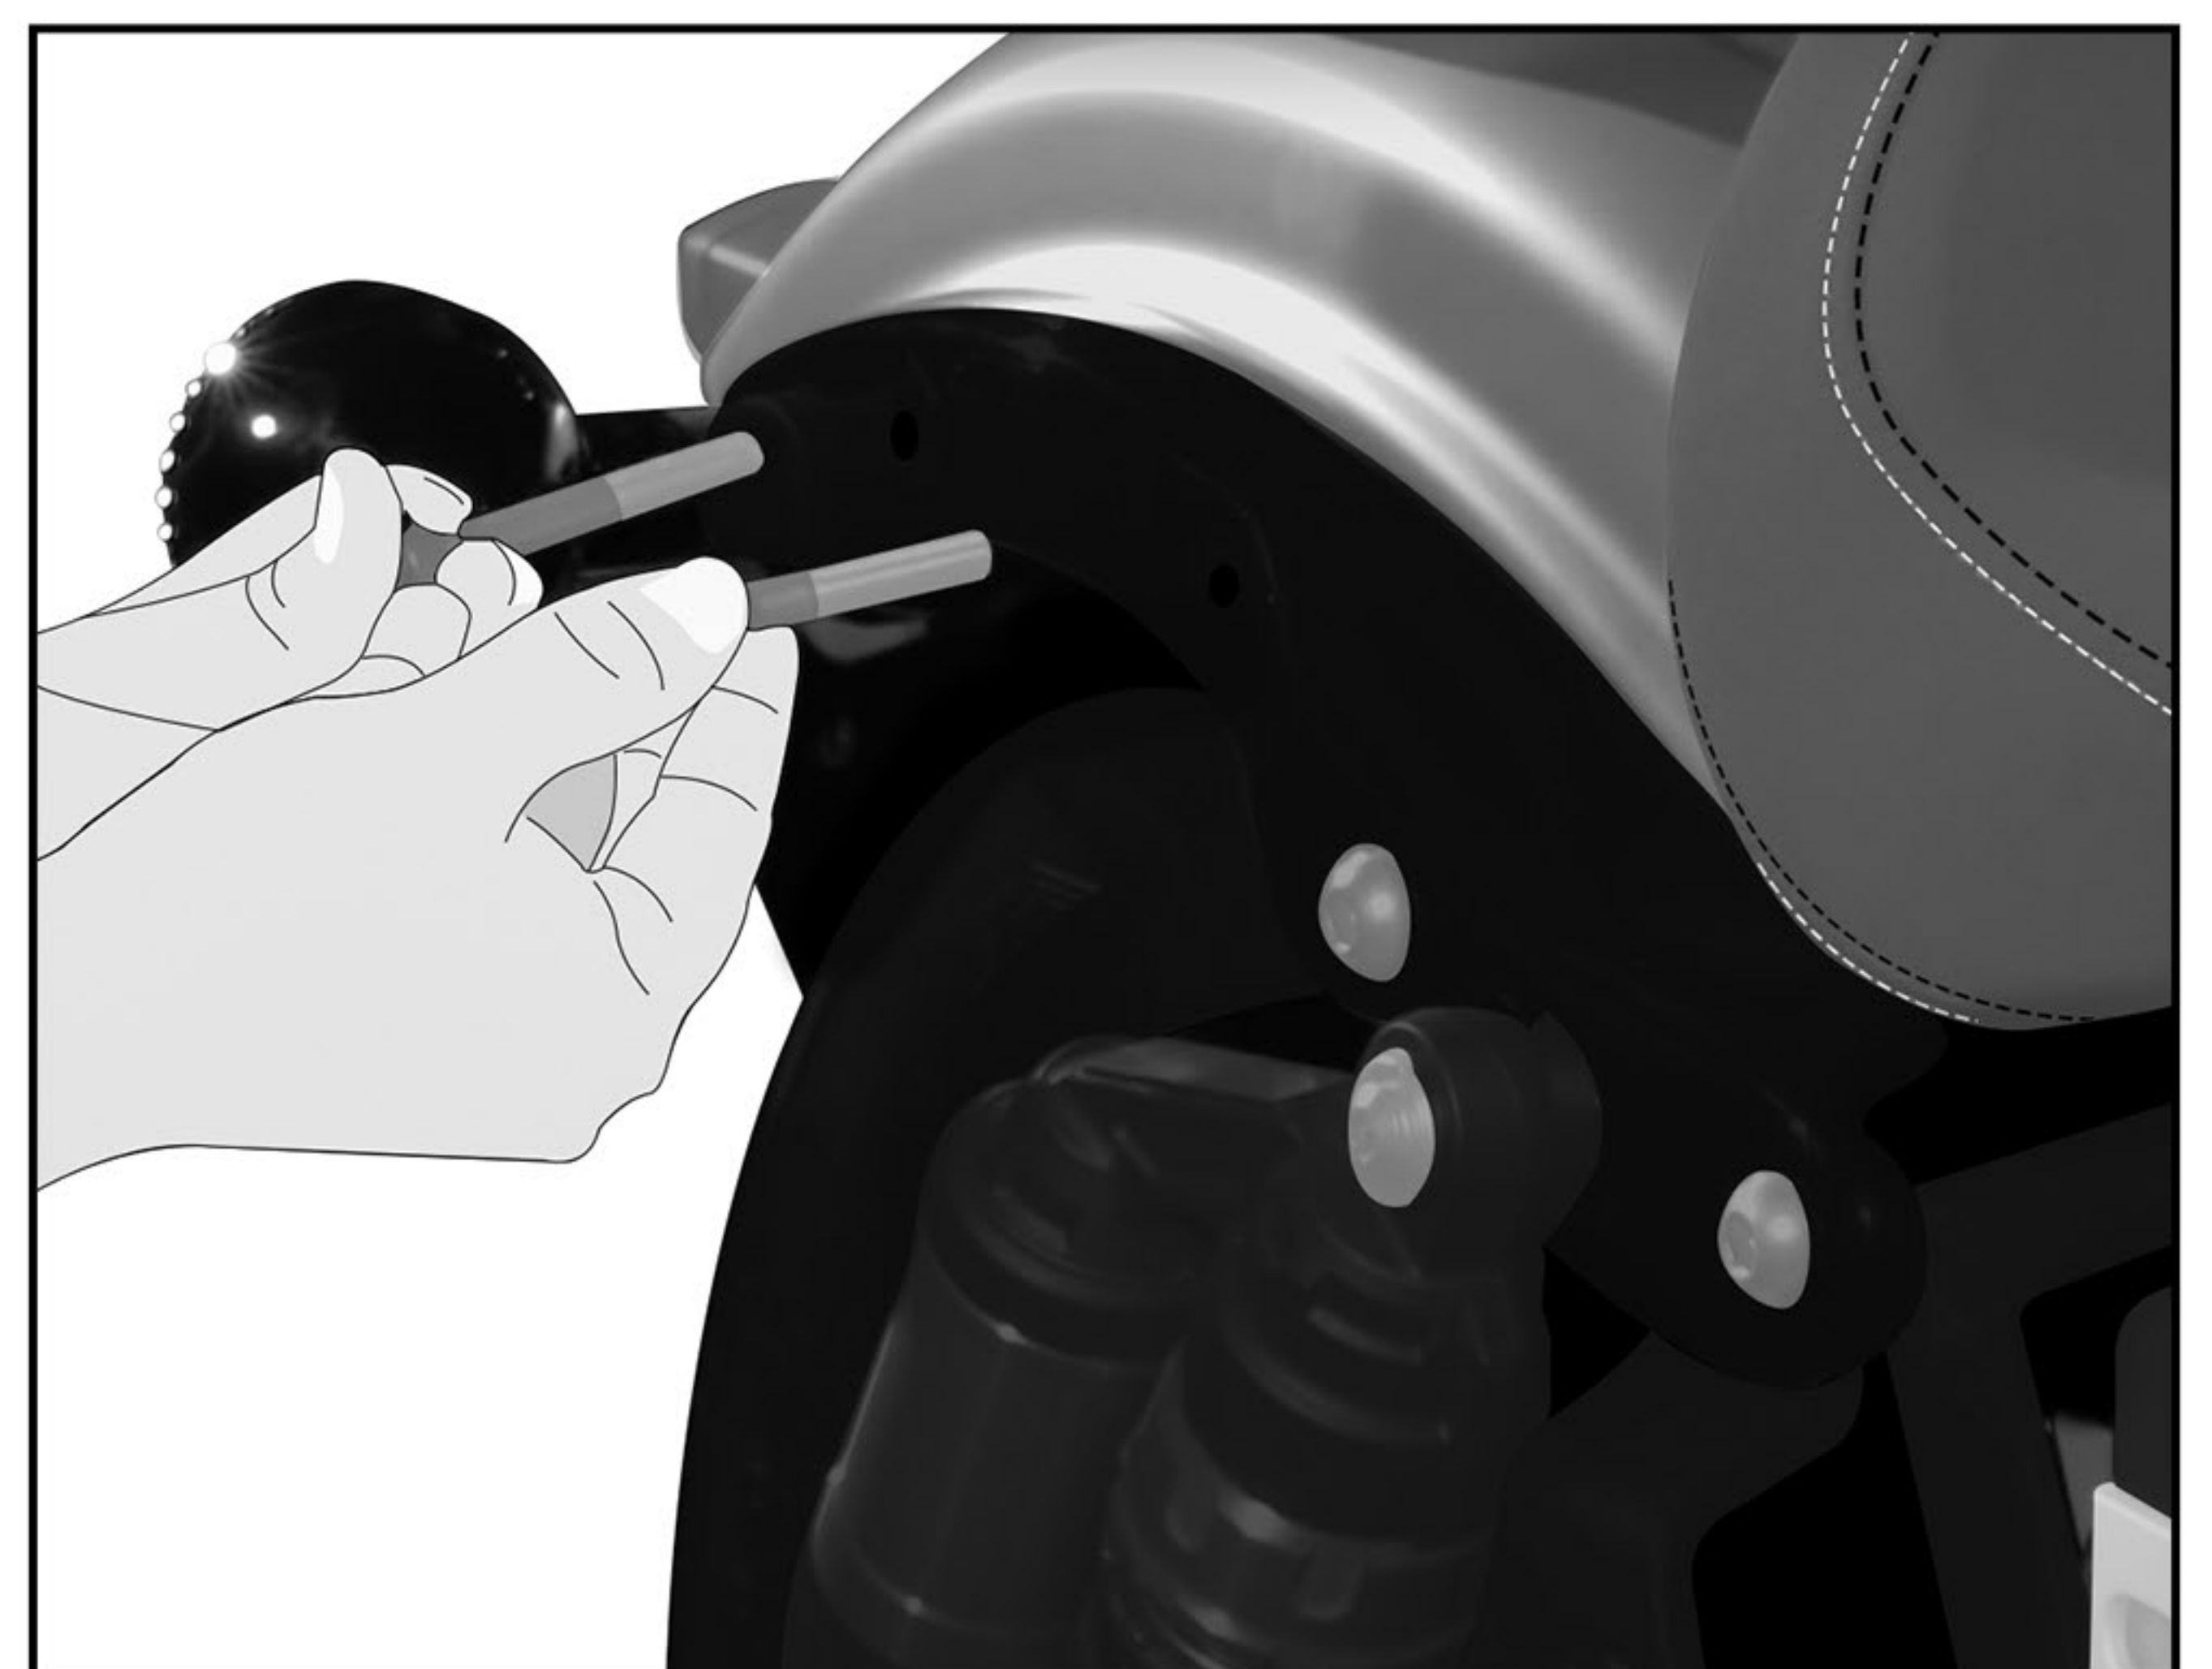


(Fig 2)

## Step 4

Now to install the sissy bar, you want to leave the side arms slightly loose so that you can get it lined up.

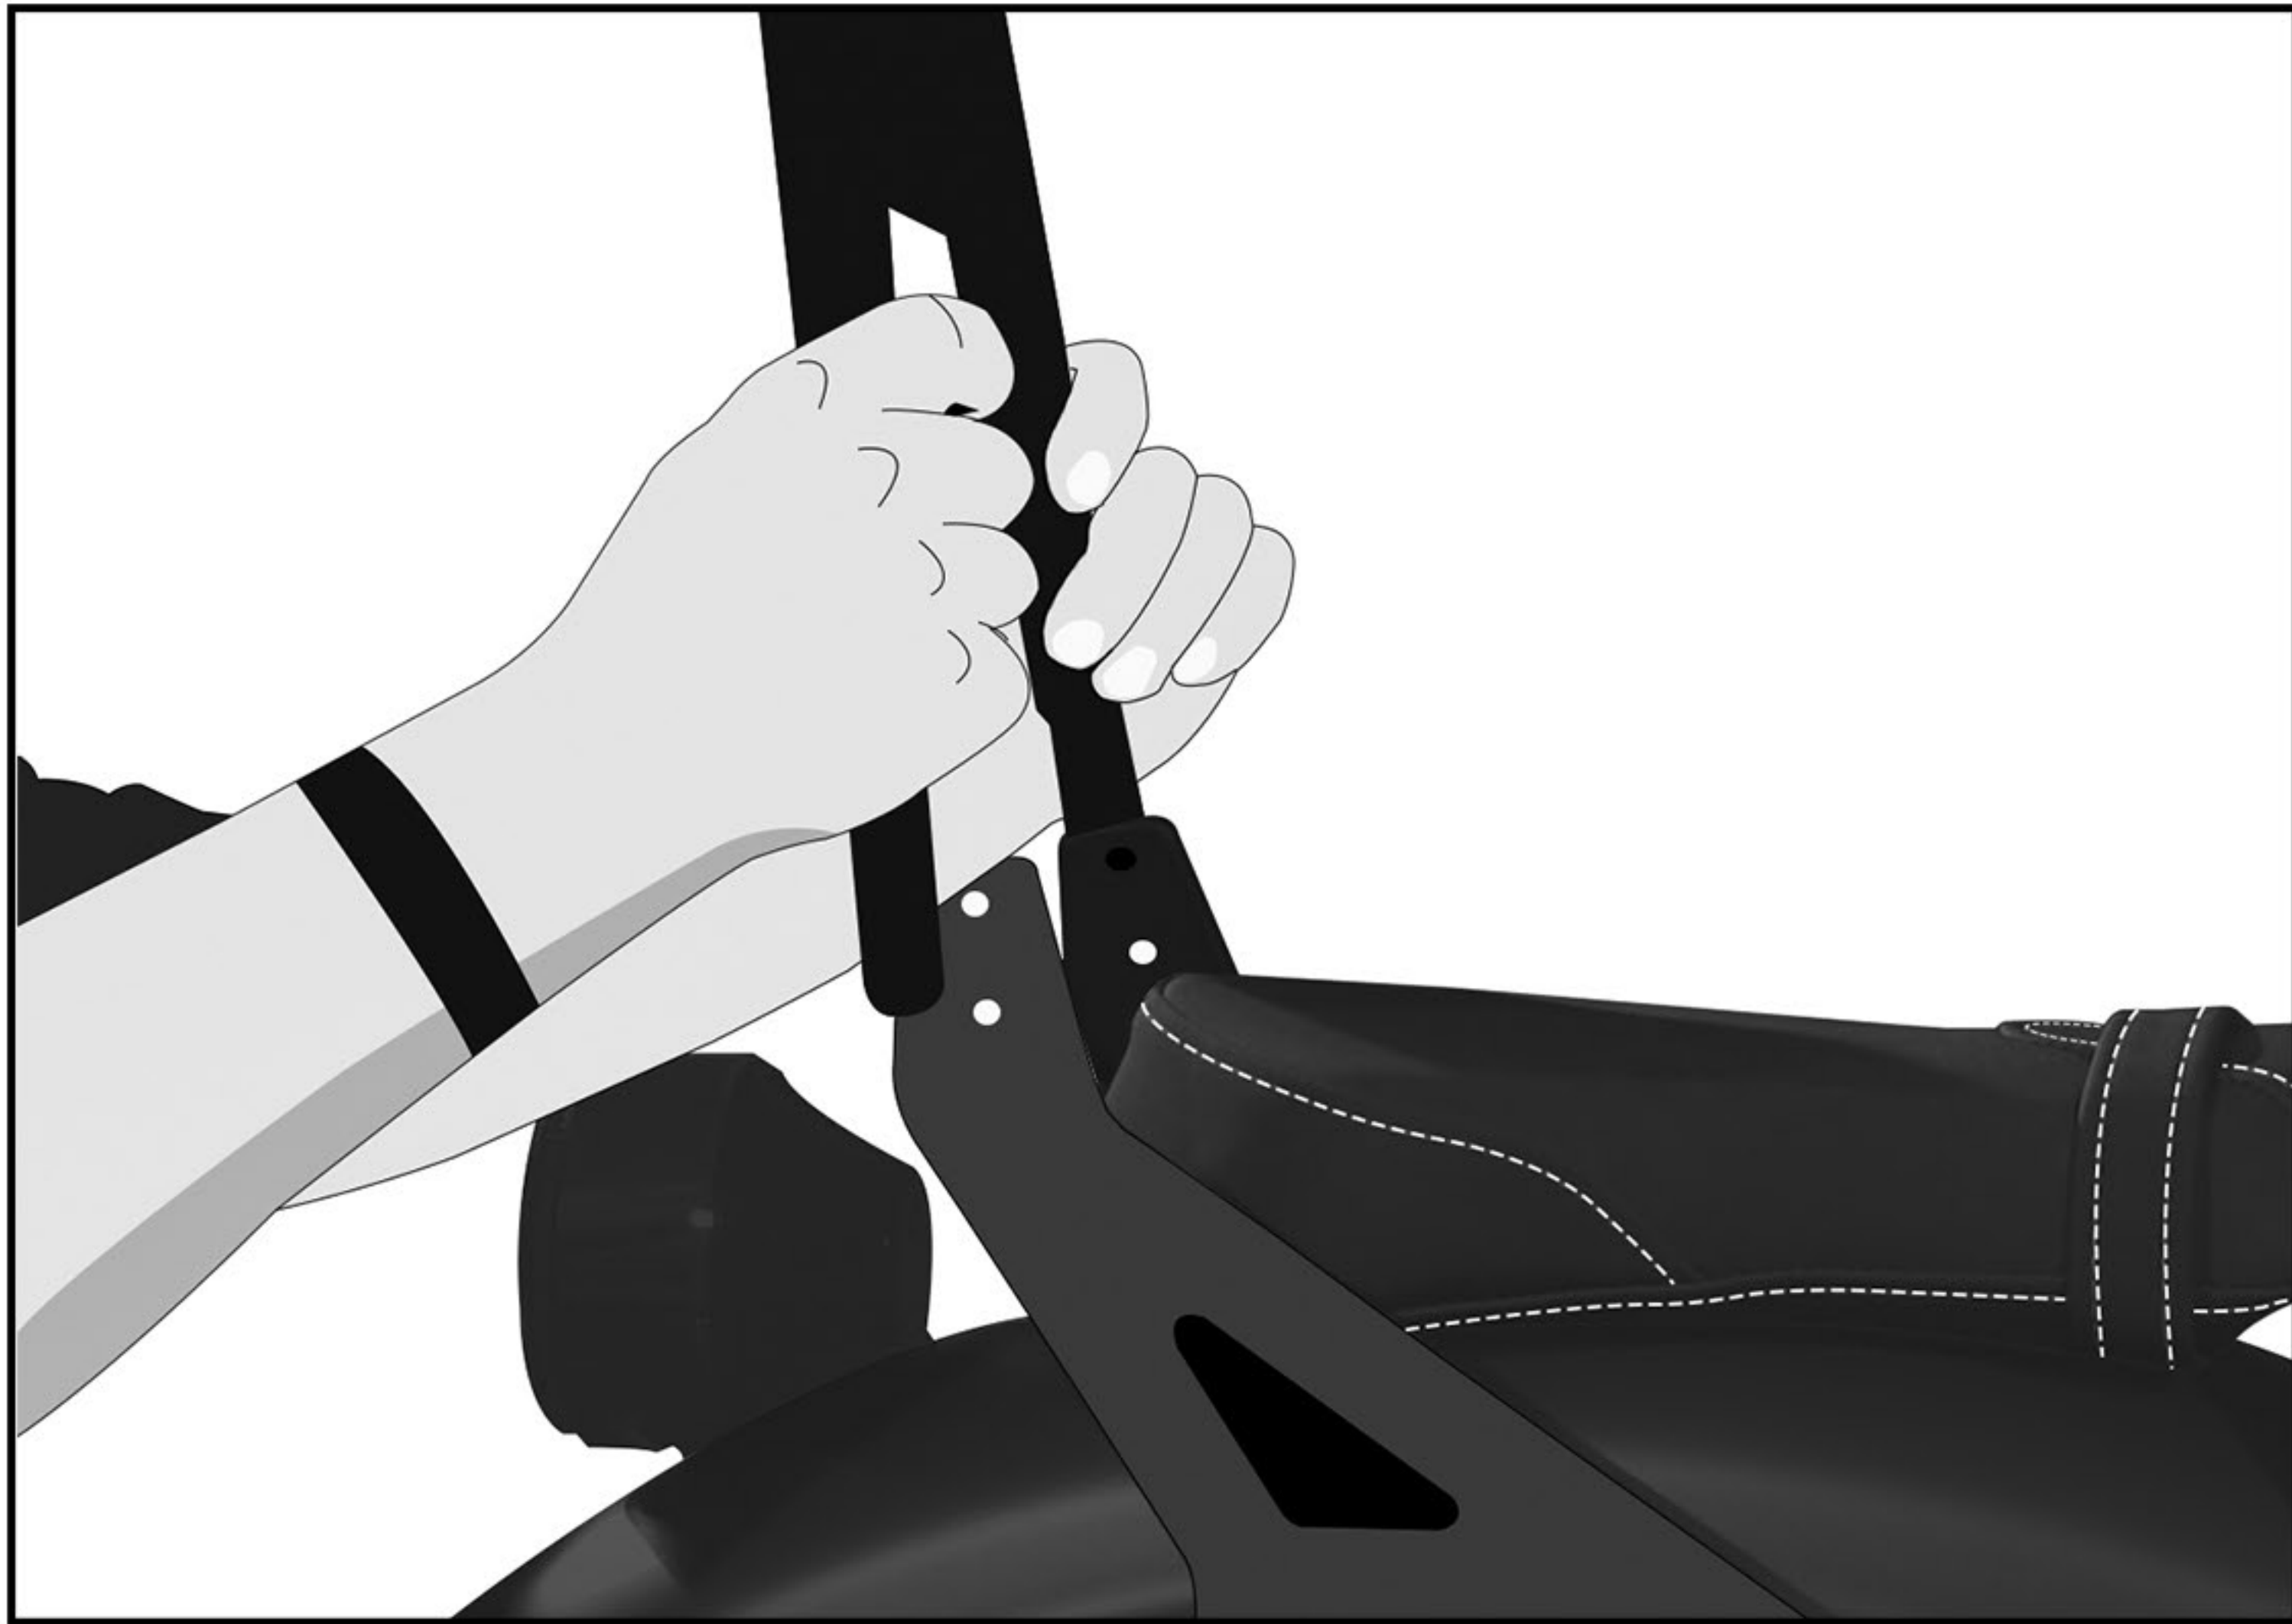


(Fig 4)

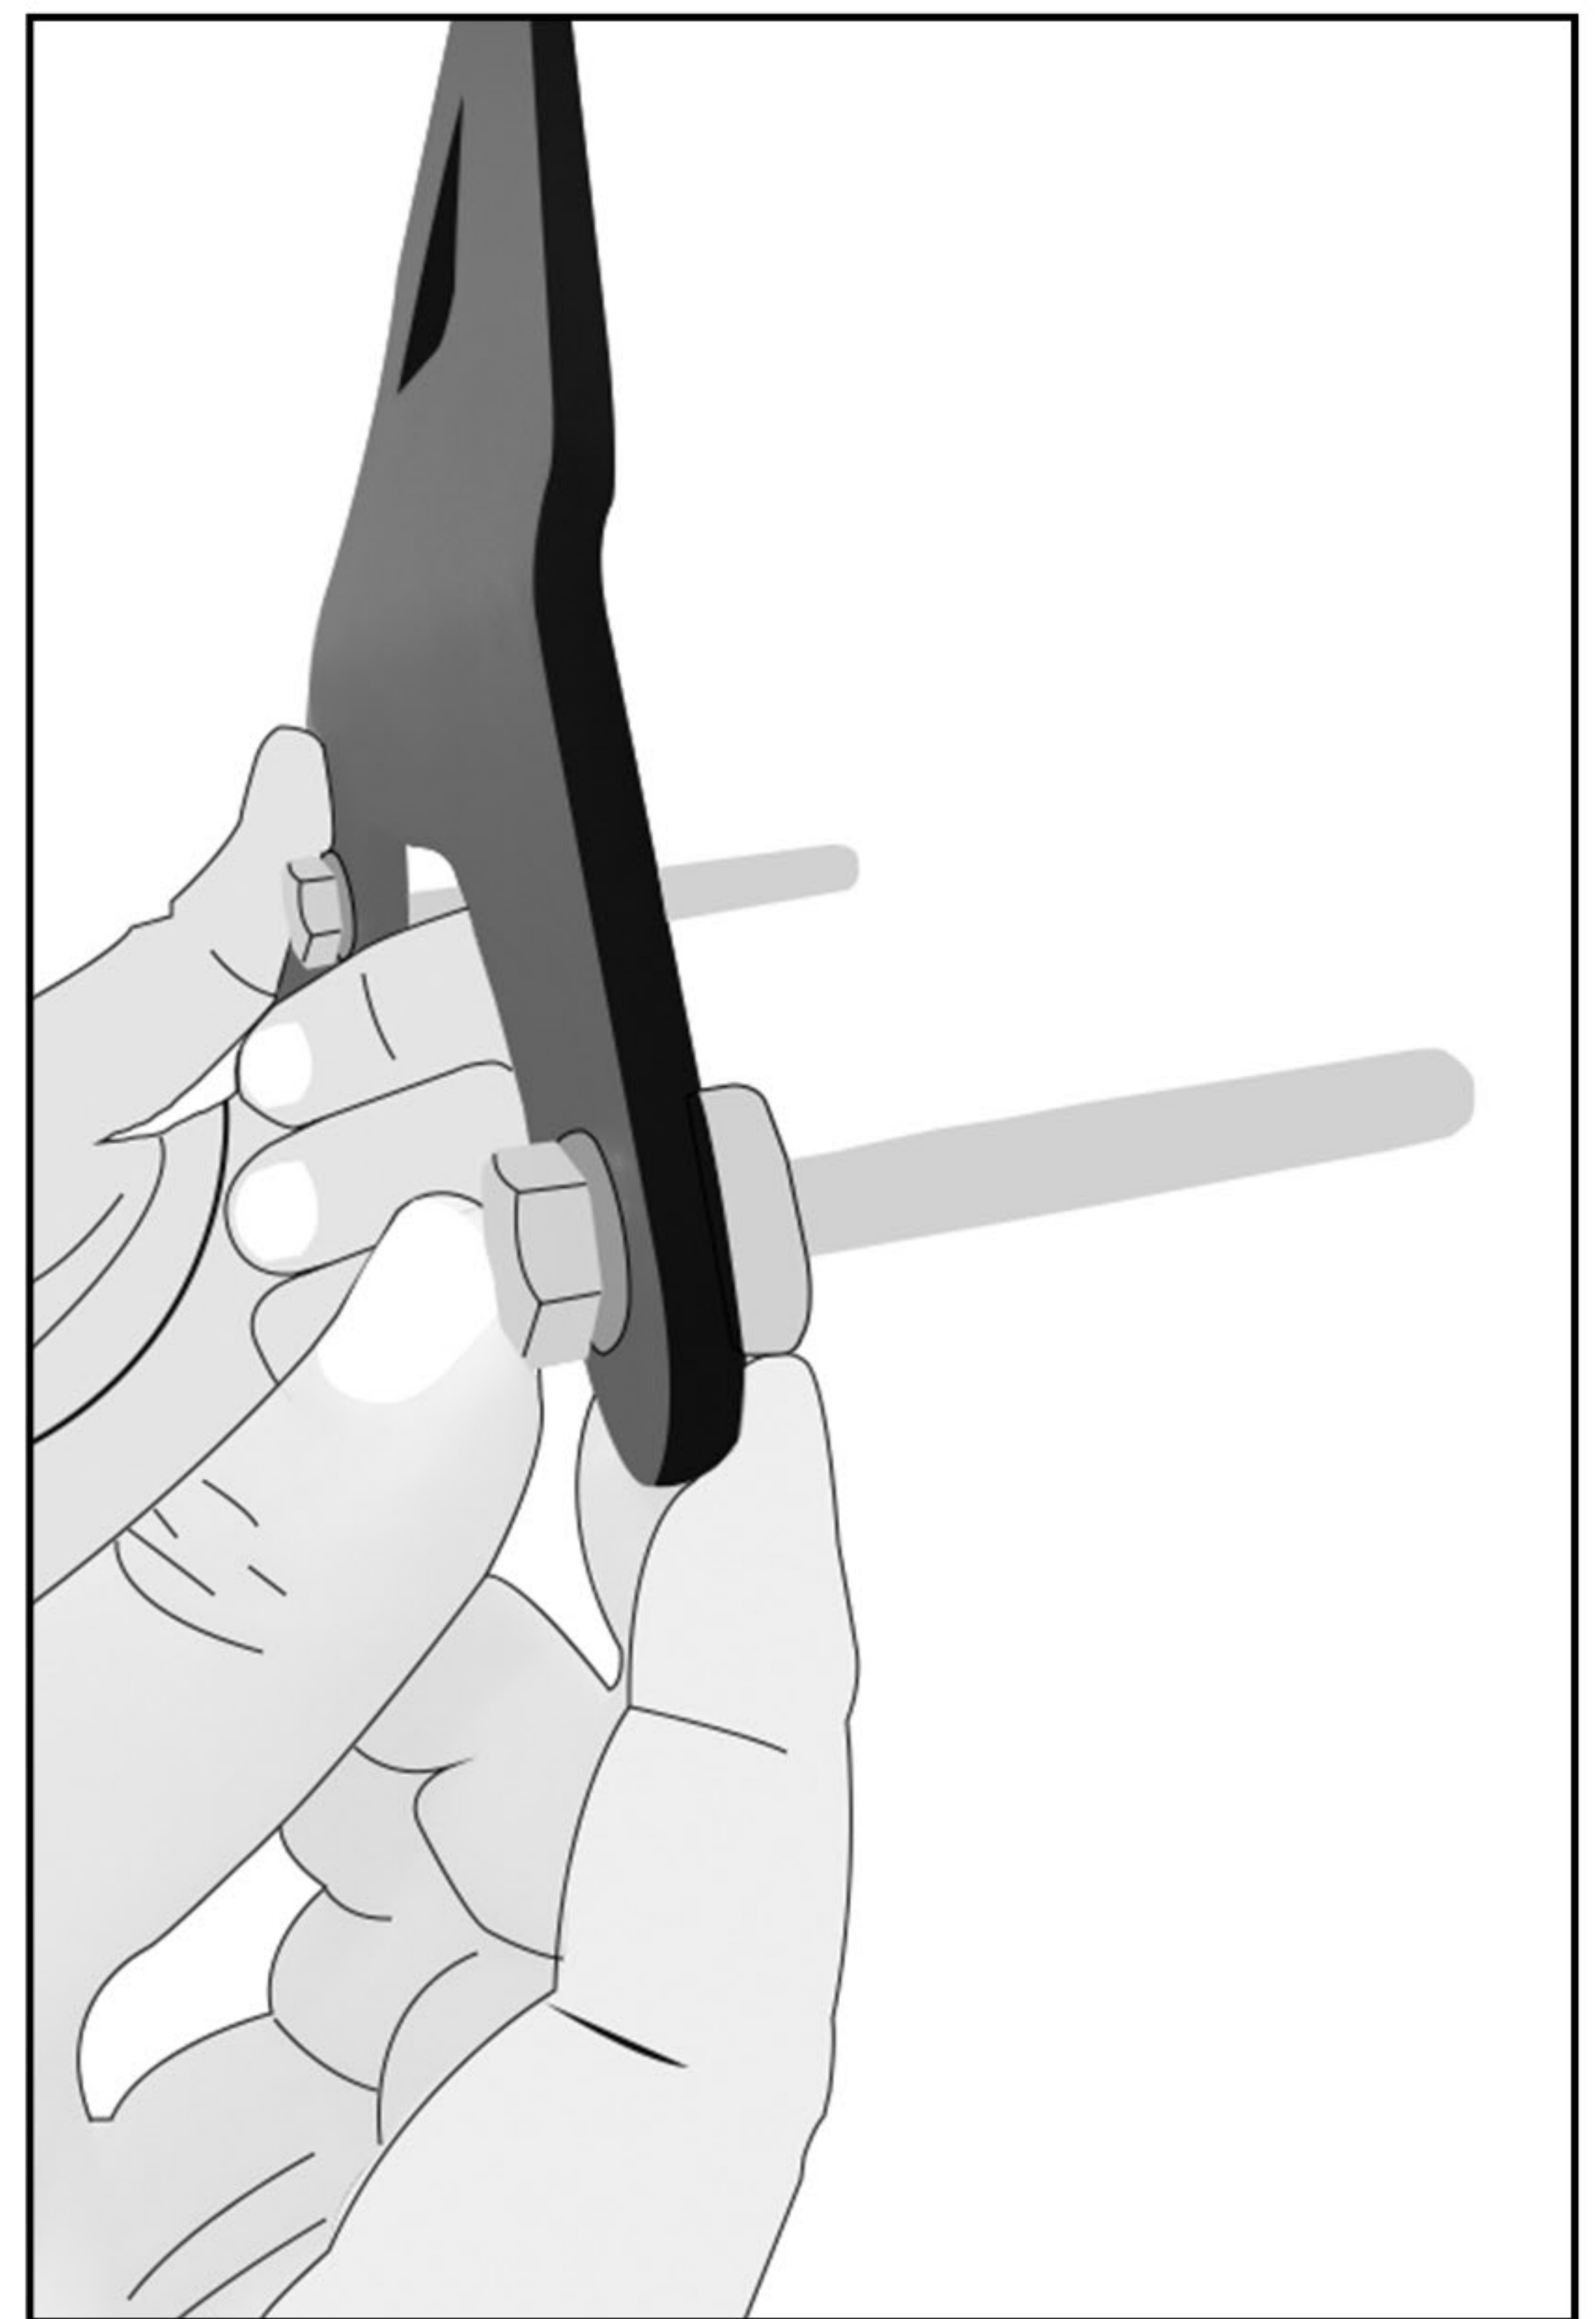

(Fig 3)


Now ask for a helping hand and then run the button head allen bolts from the inside. (See Fig 5.)

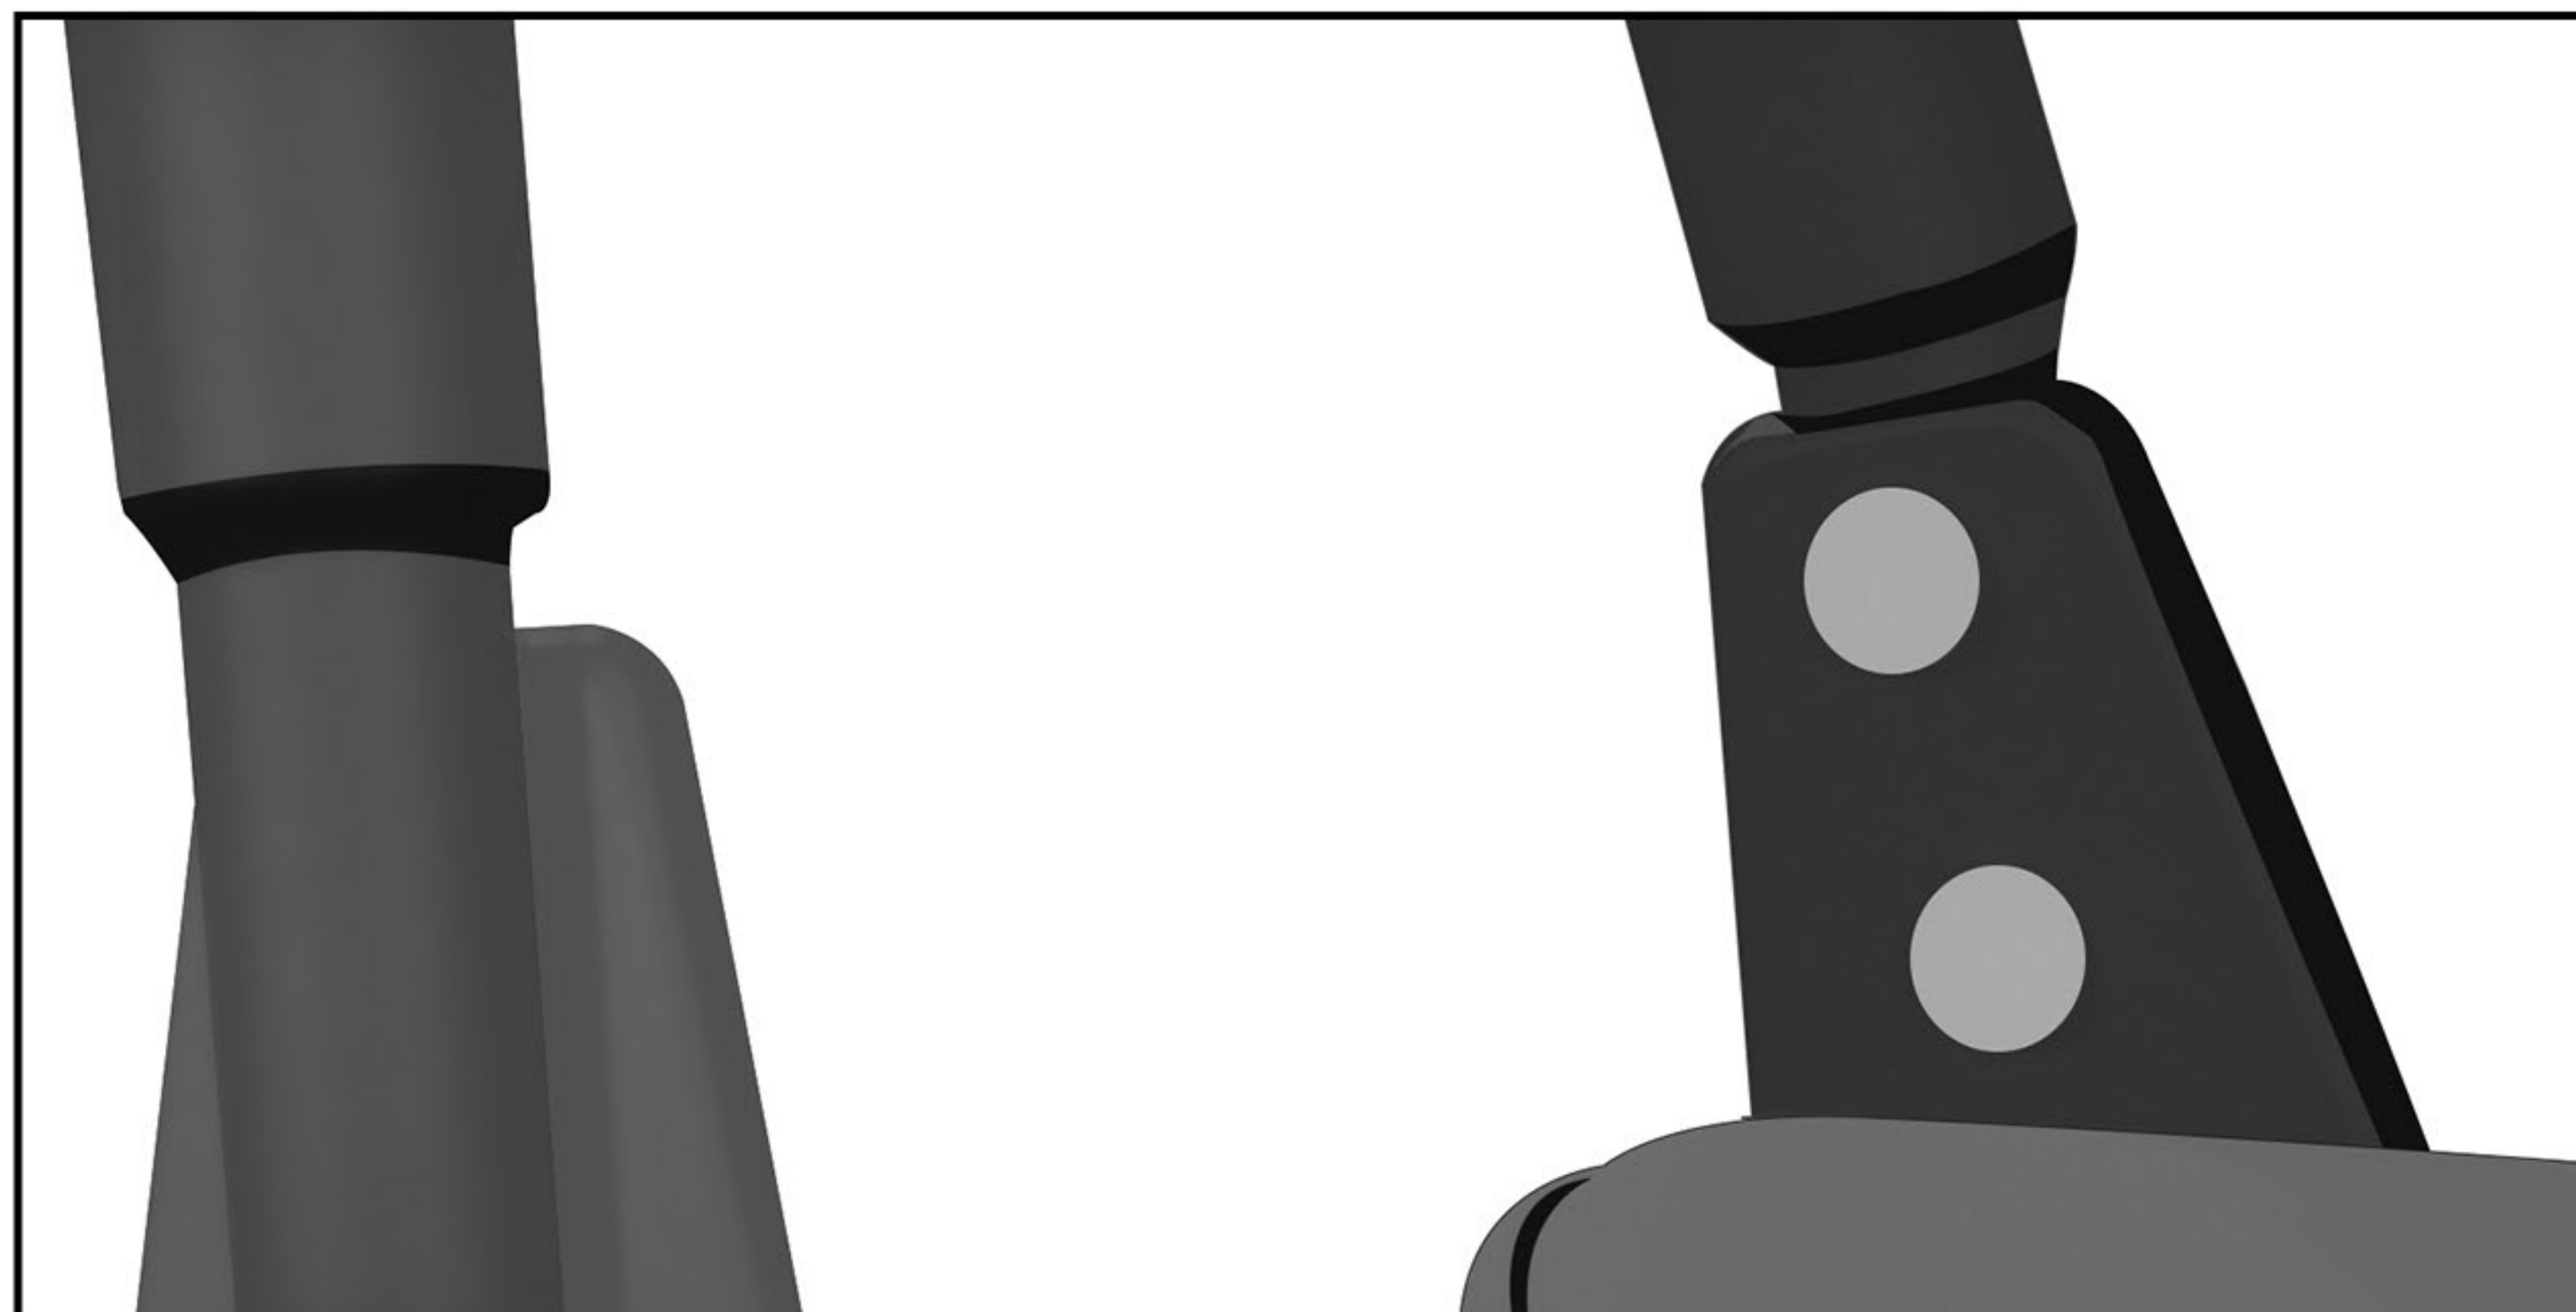

(Fig 5)

## Step 5

Finally use the three head bolts to screw the sissy bar pad onto the sissy bar, just line up the bolts and start threading the bolts into place. (See Fig 6.)

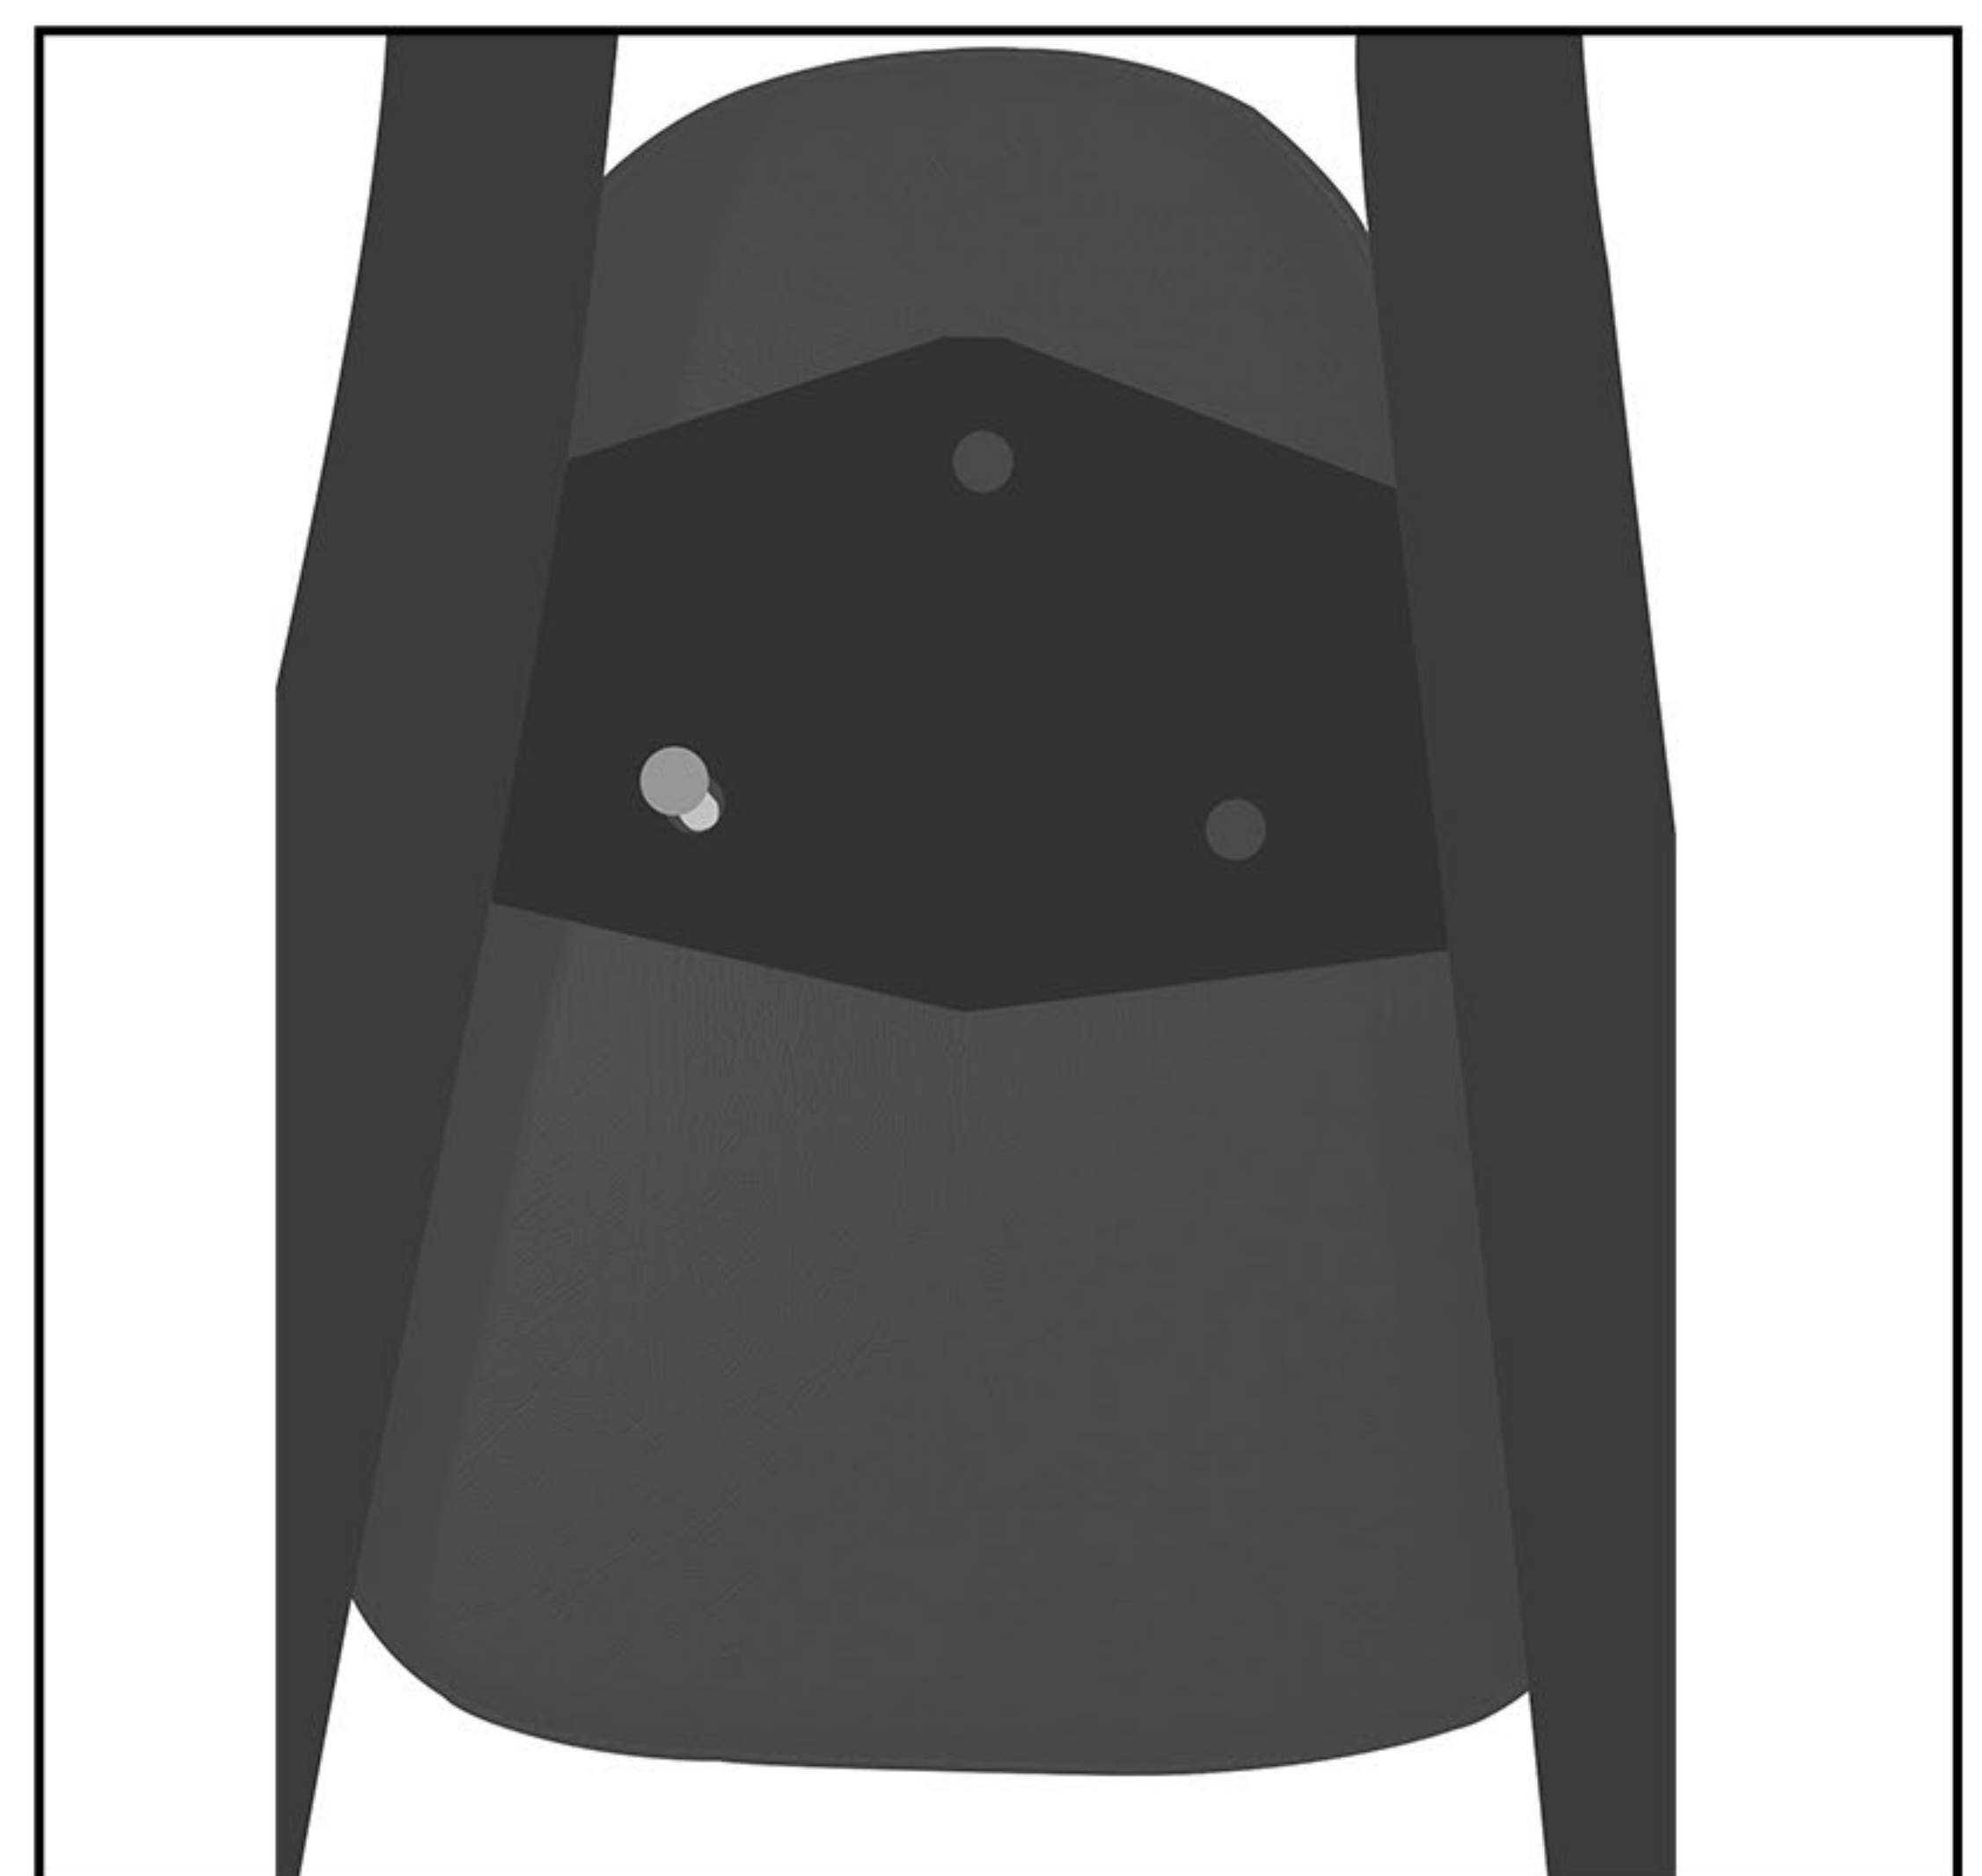

(Fig 6)

**Congratulations! Your Yamaha Bolt Battle Axe Motorcycle Sissy Bar with Backrest is mounted and you are ready to ride!**

## **Warnings !**

- Check all screw connections after the installation for tightness.
- It is important to note that if you do not mount the sissy bar properly damage may be caused to the motorcycle.
- In case you are unsure about your ability to install the racks securely, please seek assistance from a qualified mechanic.