# Viking Blade Tour Pack Luggage Rack:



#### Parts:

- Rack Assembly x 1
- ii Allen Key Head bolt 6mm x 20mm (1.25) x 4
- iii Flat Washer x 4
- iv Mounting Pads x 4
- v Plastic Washers x 4


#### Note:

The combined load of Tour-Pak and the luggage rack should not exceed 25 lbs. Exceeding the weight can cause a loss of control of your vehicle. This can lead to serious injury or death in severe cases.

#### Instructions:

# Step 1

Place the rack on the Tour-Pak to get the positioning, use furniture pads or moving pads in this step to prevent scratching on the Tour-Pak. You can either position it close to the back of the seat or towards the back of the Tour-Pak so that it is even. Once positioned, circle the points with a marker.

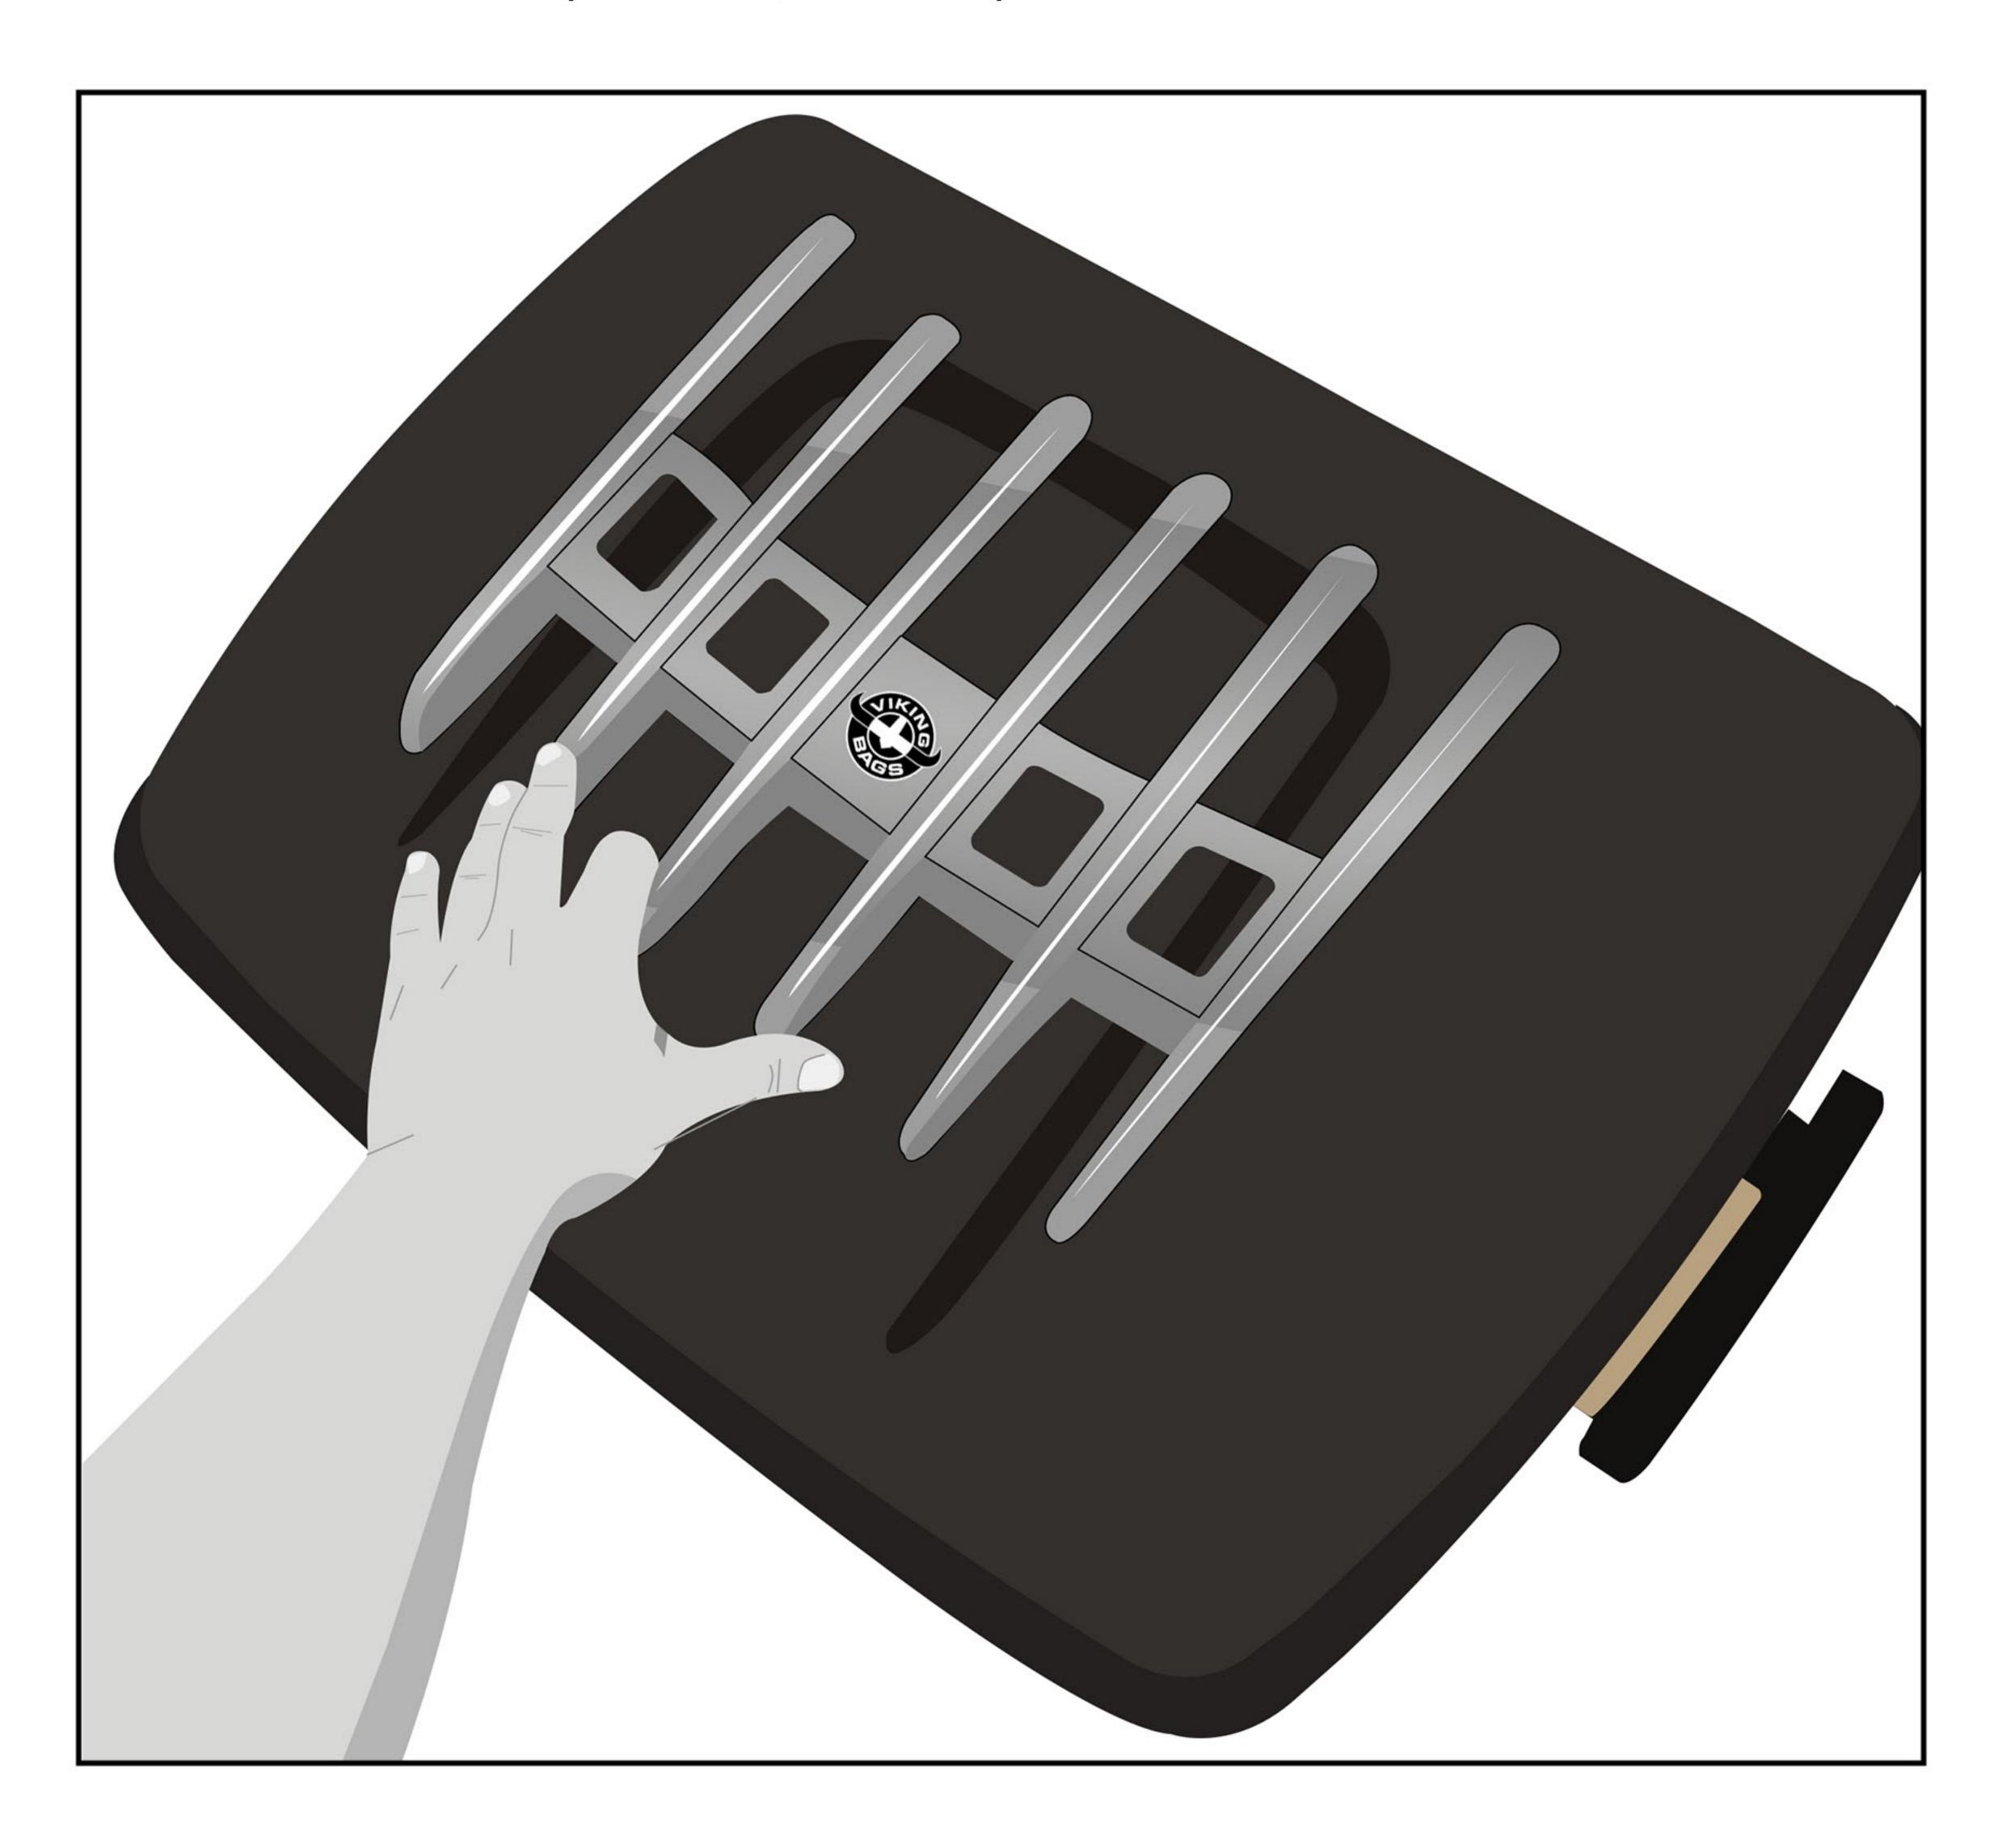

# Step 2

Use transparent Anti-Scratch tape along the lines of the marked points to prevent cracking of the paint when you are going to drill the holes. Now place the rack on top of the Tour-Pak and use a measuring tape to make sure it is even on all sides.




# Step 3

Now get a helping hand to have them push down on the rack, this will help prevent them from sliding. You can now use the marker to trace the base of each leg.


# Step 4

Next, use a ruler to find the center of each traced circle. Once you are done with all the four circles, go ahead and double check your measurements to see if it is centered and even from all sides before you start drilling.

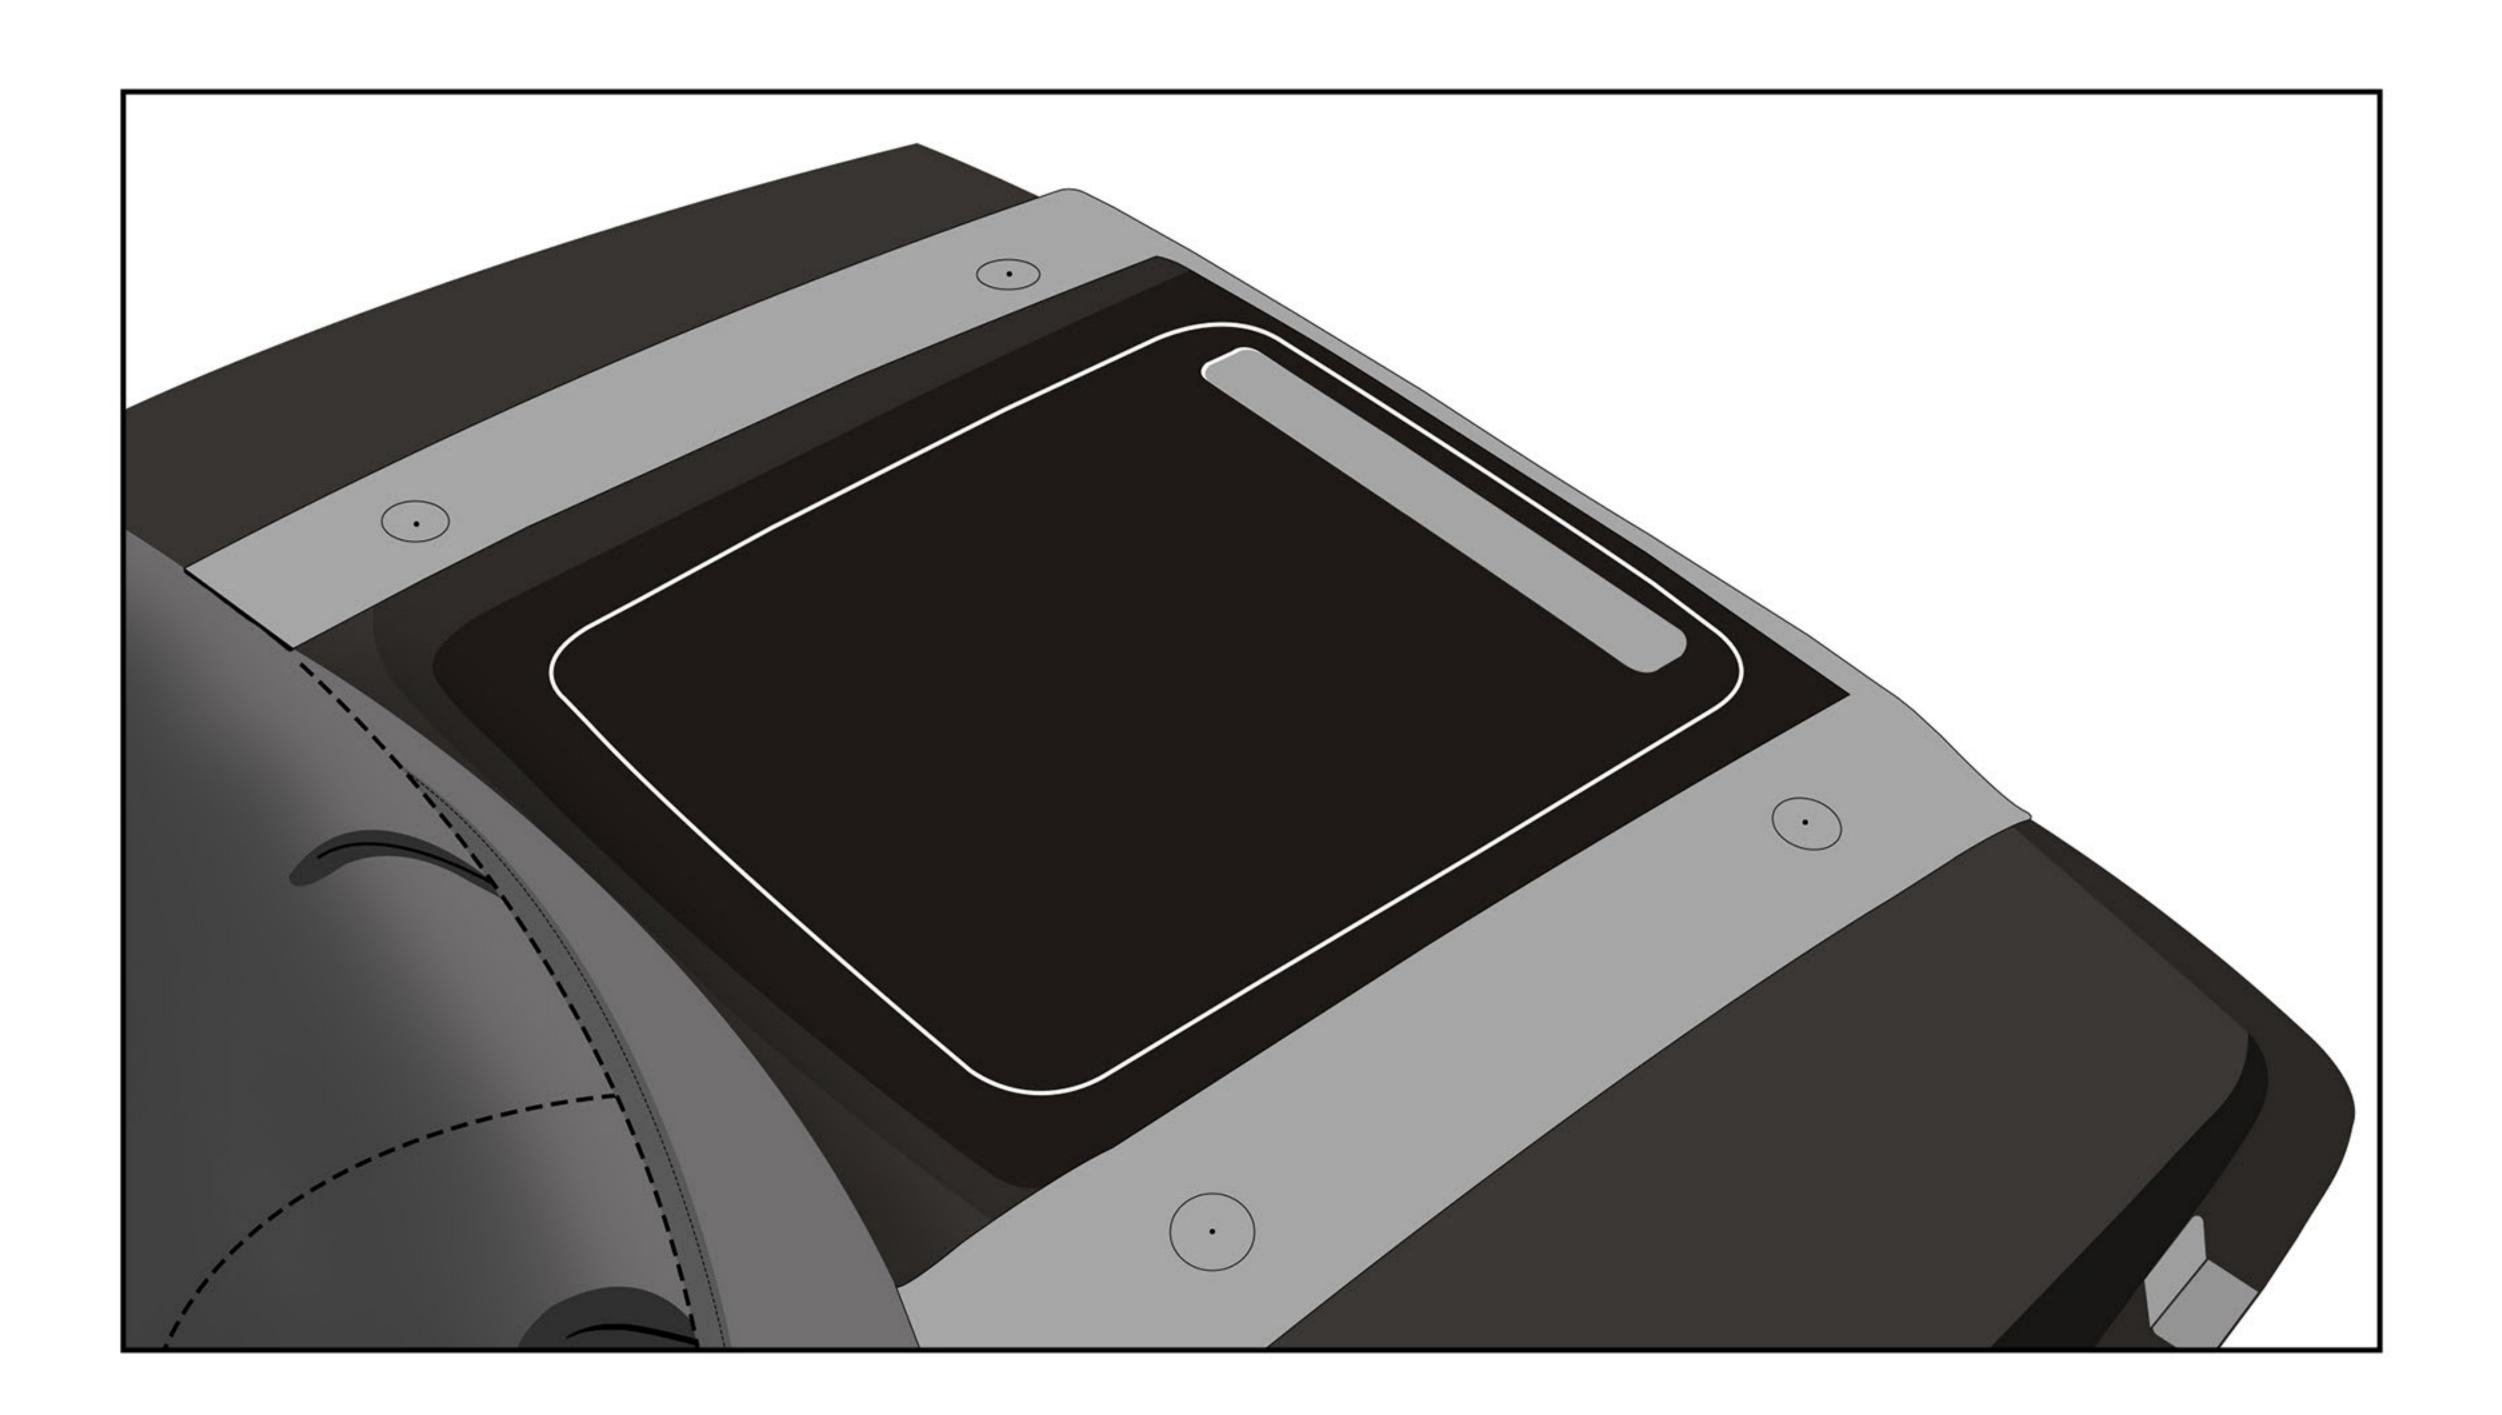


# Step 5

Use a 5/64-Inch drill bit and run the drill in reverse to make a pilot hole. Drill a pilot hole for each location, remember to drill the hole in reverse at first to get through the paint then run it forward to go through the plastic.

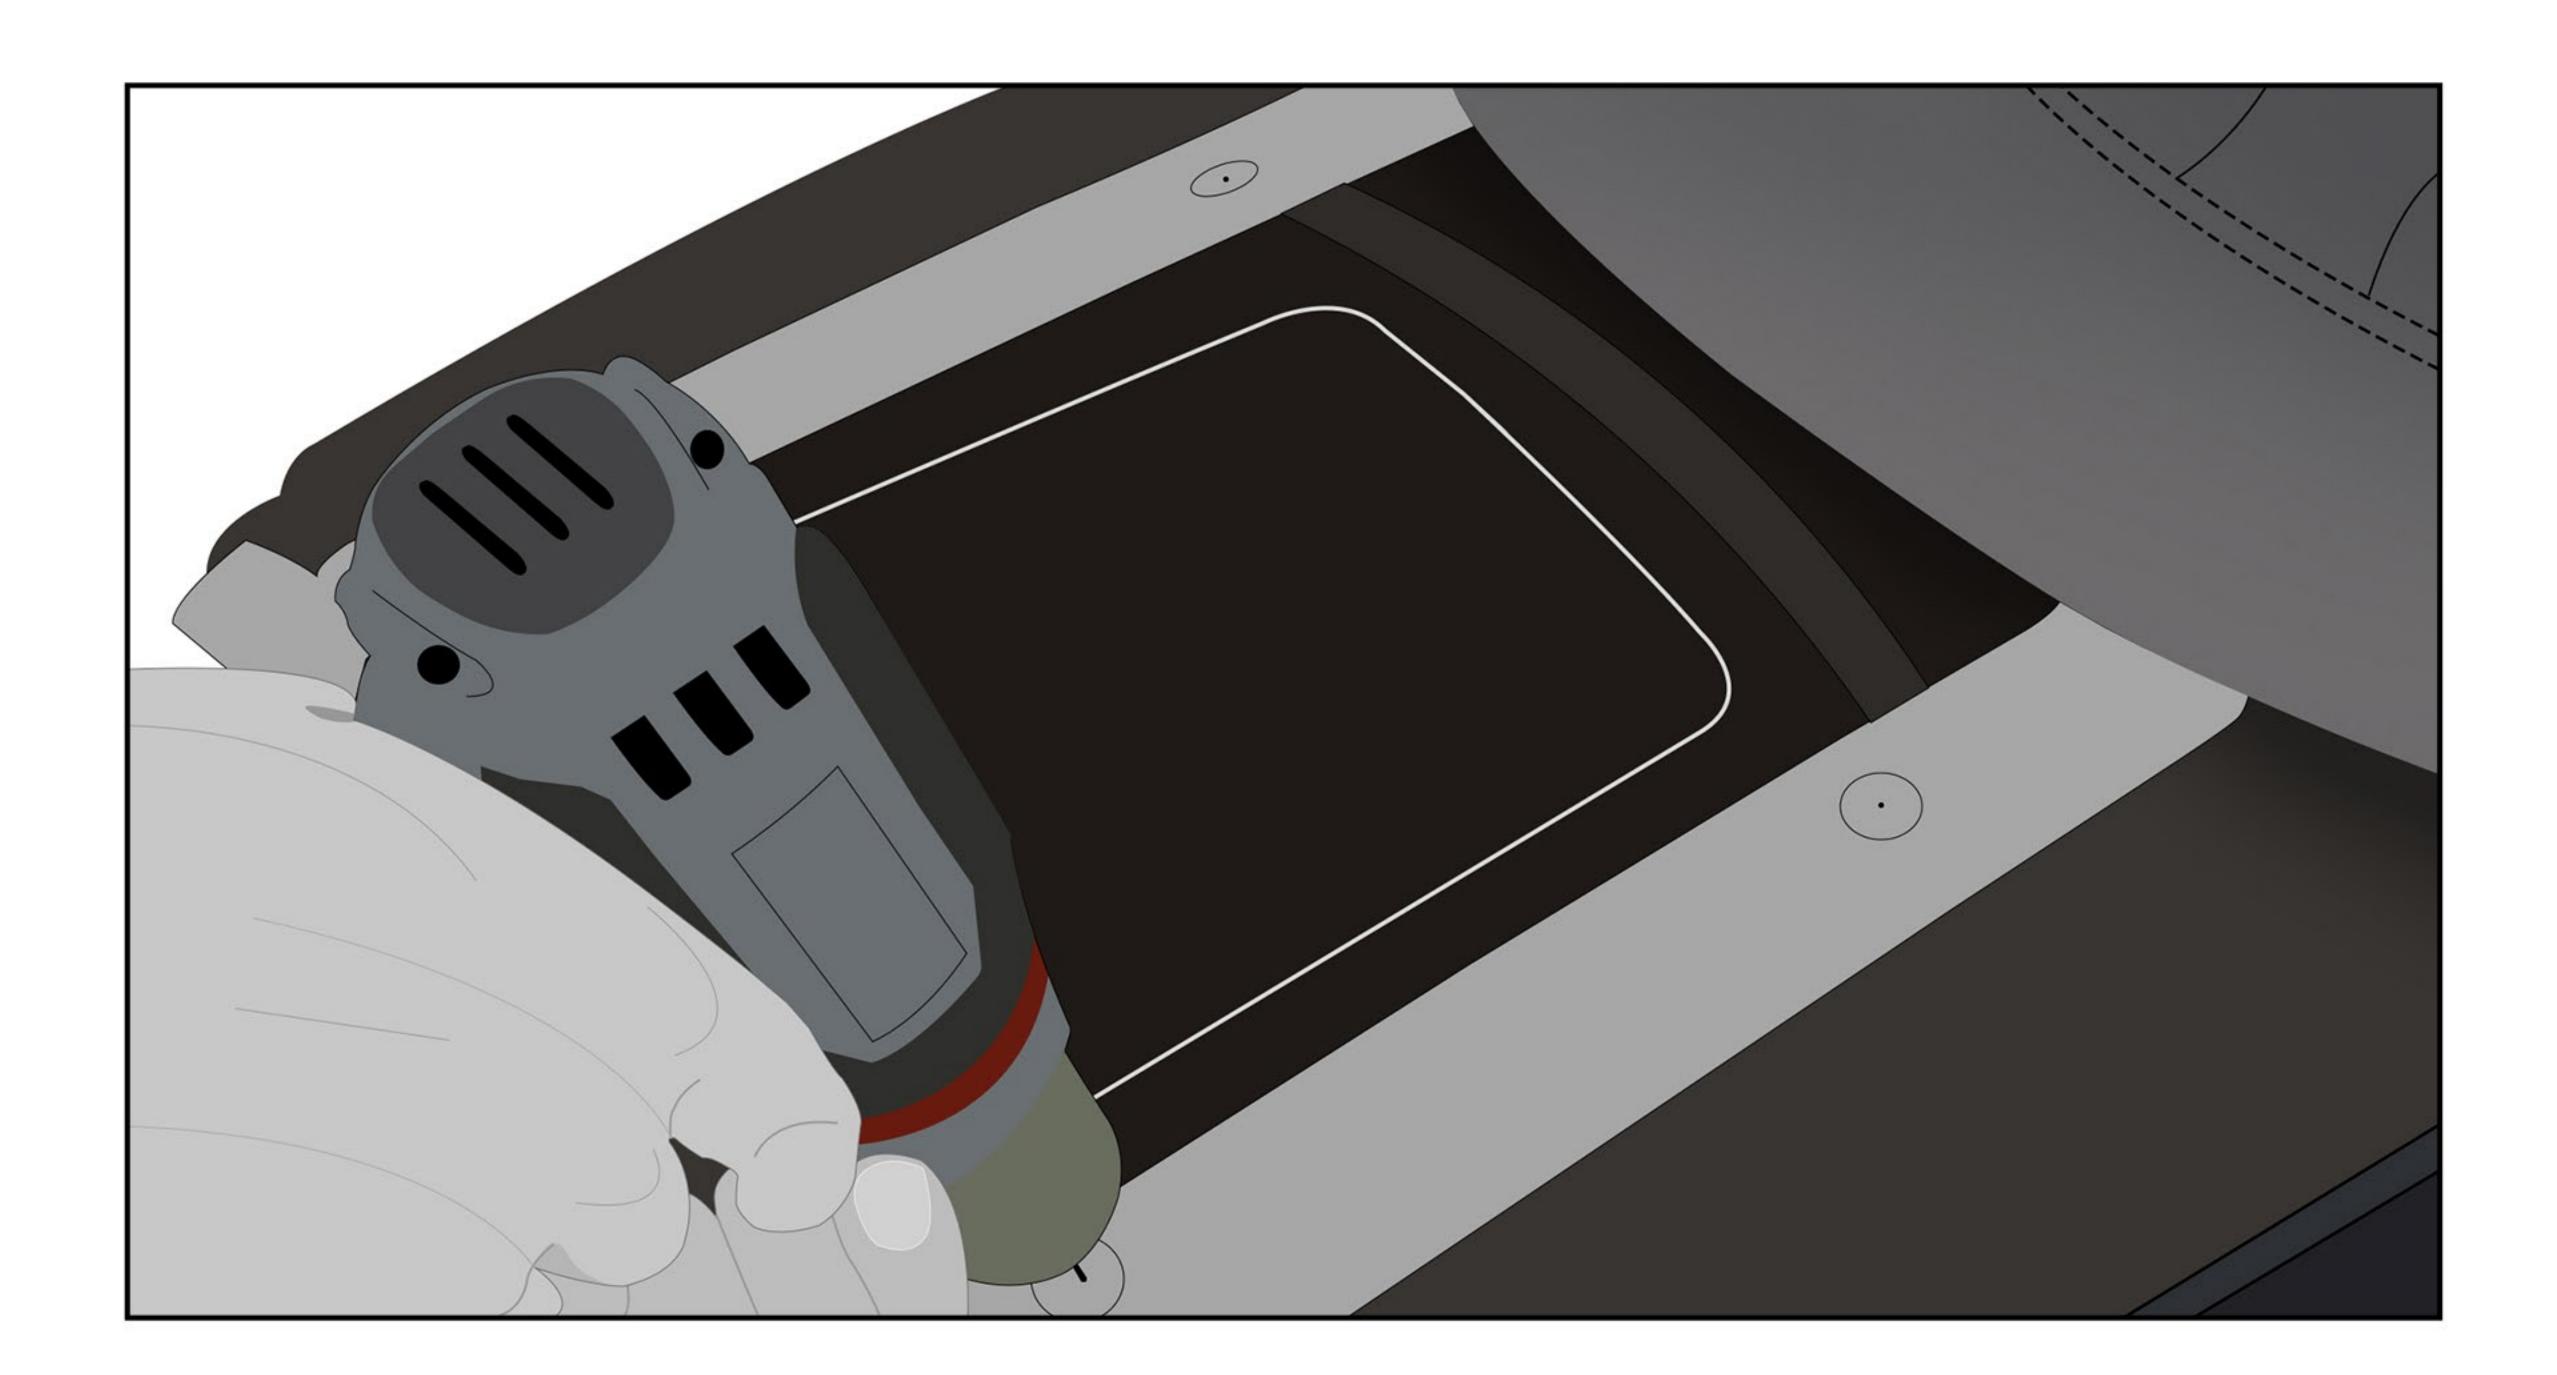

# Step 6

After the pilot holes are drilled use a  $\frac{1}{4}$  inch sized drill bit to finish the job.

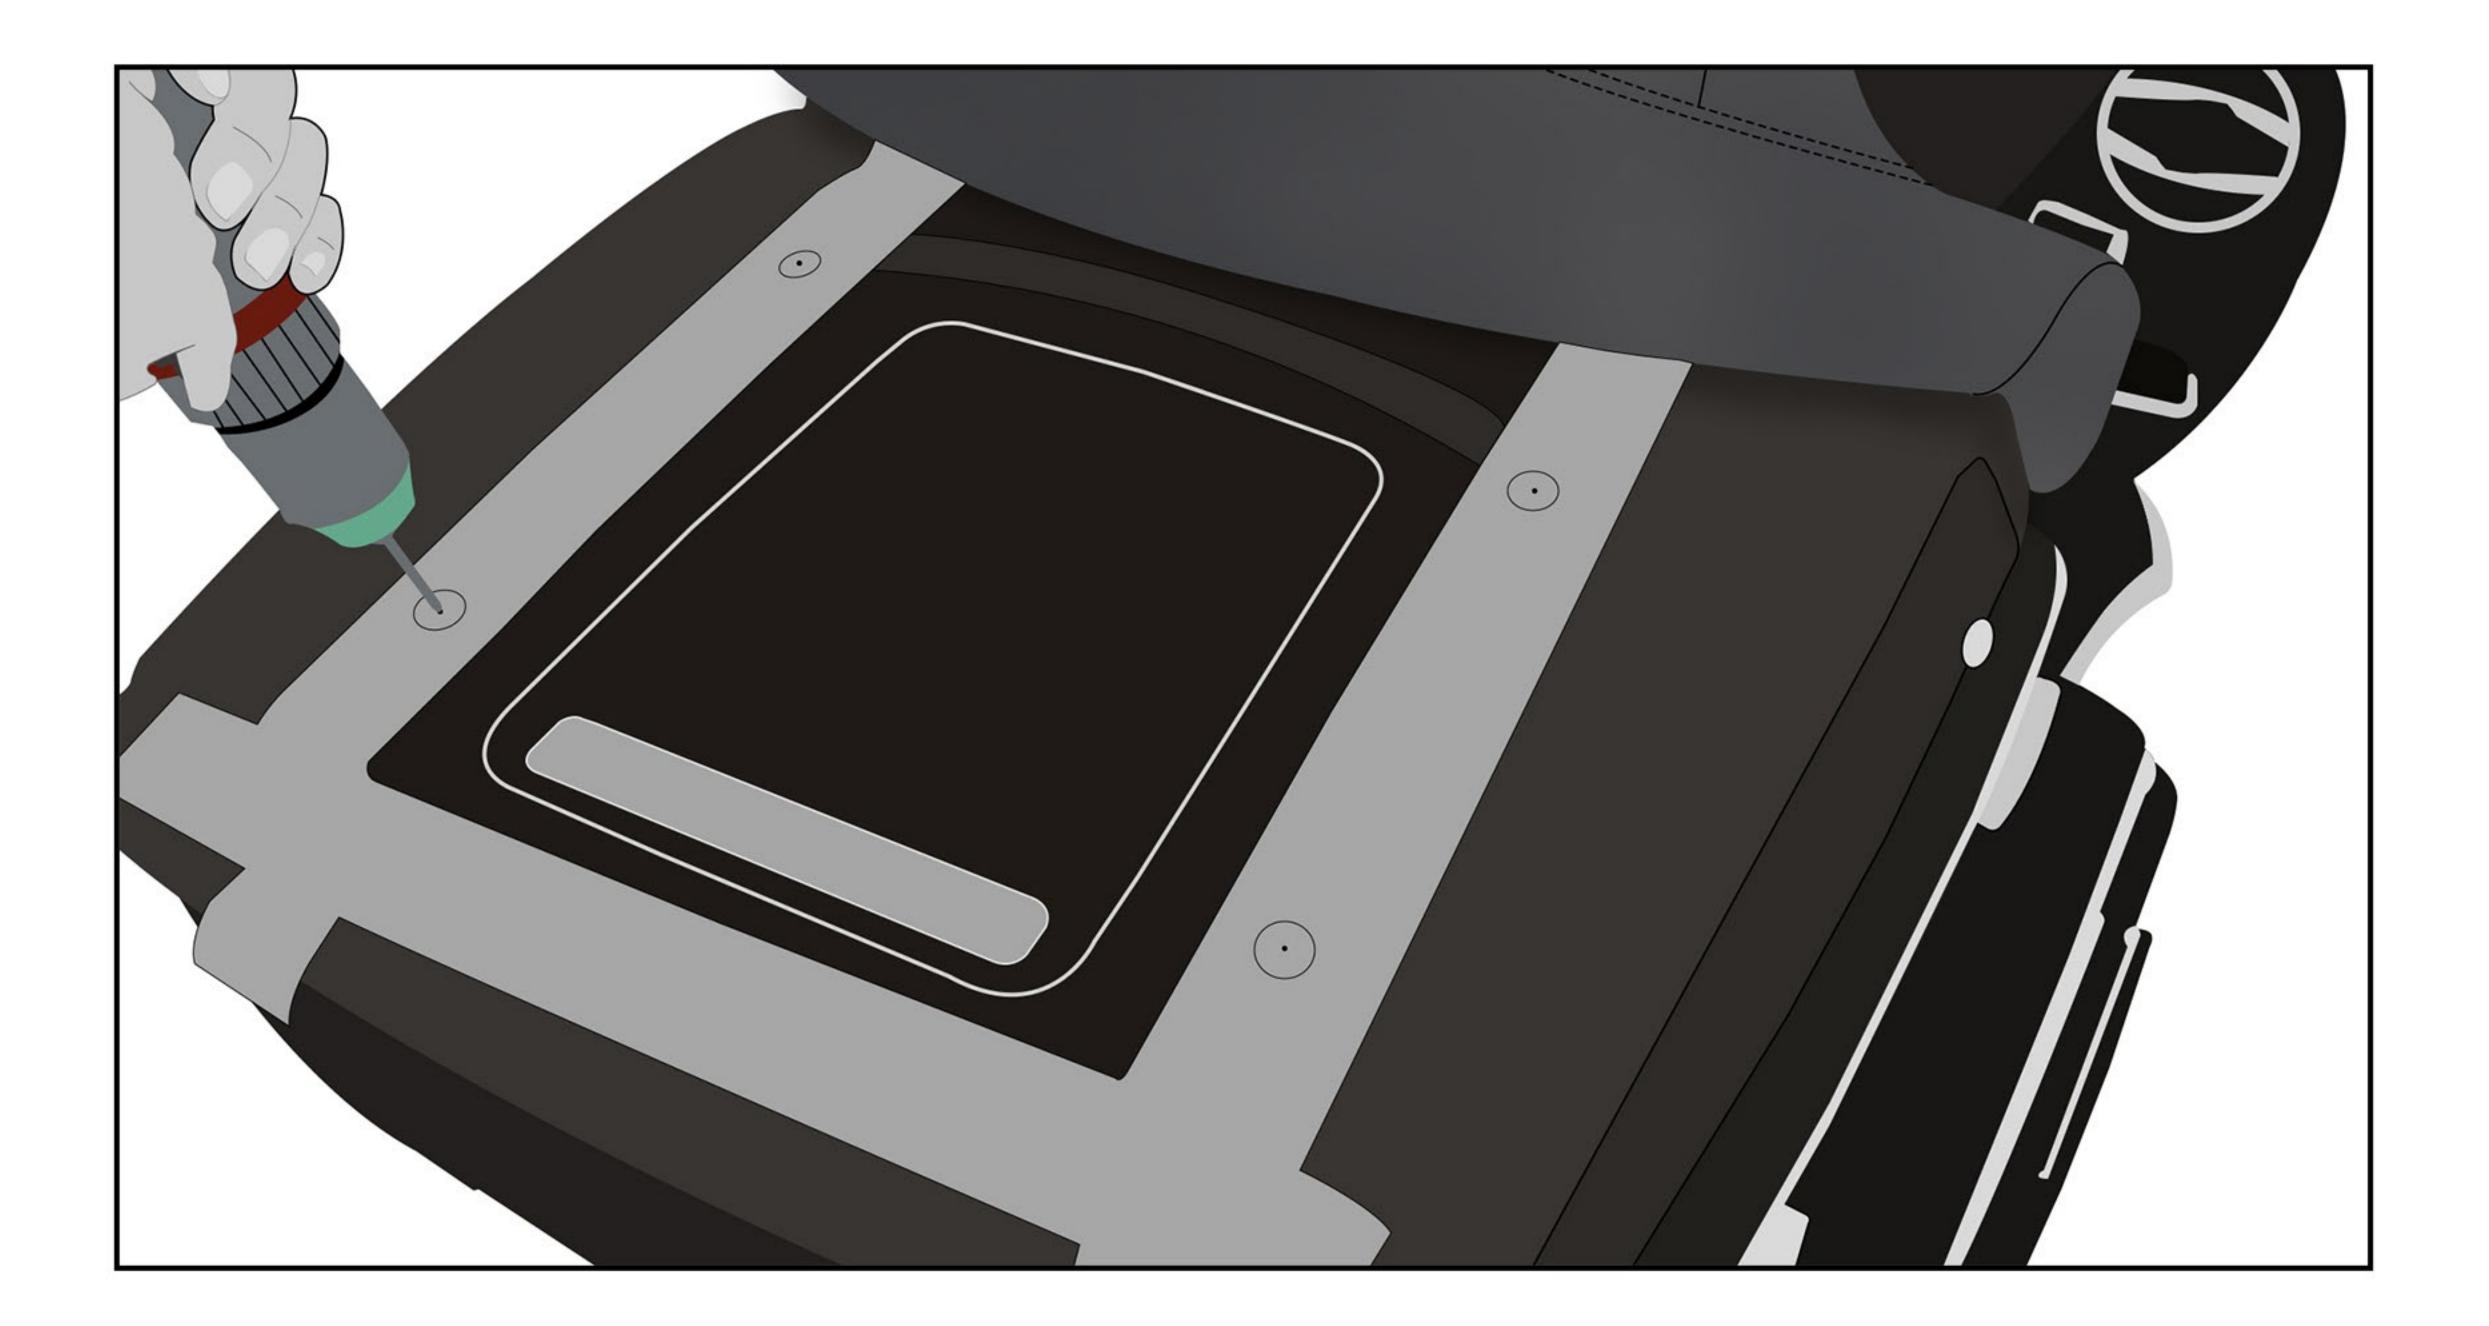

#### Step 7

Now remove the Anti-Scratch tape, lightly sand to remove any irregular edges and gather all the four bolts, they should have a metal washer and plastic washer, plastic washer goes on the side of the Tour-Pak. Use a helping hand to place the rack on the Tour-Pak and slide bolts through to secure the rack on the Tour-Pak.

#### Step 8

Finally, use a helping hand to place the rack on the Tour-Pak and slide bolts through to secure the rack on the Tour-Pak.

# Congratulations! Your Viking Blade Luggage Rack Tour Pack Luggage Rack is mounted and you are ready to ride

#### Warnings!

- Avoid usage of any mounting part that is impaired or is not working properly.
- If you are not sure about the installation of the luggage racks, do not use them.
- Do not exceed luggage rack weight capacity. Too much weight can cause loss of control of the motorcycle.
  Which can lead to serious injury or death in severe cases.
- Sporadically check for shifting of the racks and verify that no part of the mounting system is interfering with any part of the trunk while riding.
- It is important to note that if you do not mount the luggage rack properly damage may be caused to the racks and/or motorcycle.
- Always verify that luggage rack cargo is secure. It is recommended to recheck the load periodically.
- In case you are unsure about your ability to install the racks securely, please seek assistance from a qualified mechanic.
- Viking Bags is not responsible for any damage or injury resulting from improper use of the product.