

INSTALLATION INSTRUCTIONS

www.vikingbags.com





888-208-1949 | Support@vikingbags.com

BONAFIDE TAIL BAG INSTALLATION INSTRUCTIONS

Parts

- (a) Tail Bag
- (b) Securing Straps x 4
- (c) License Plate Attachments x 2
- (d) Rain Cover

Instruction

Step 1

Place the bag on rear of your seat as shown in Fig A. You may install the bag along the seat or across it depending on your preference.

Step 2


For front securing, loop a securing strap around the foot peg (or another sturdy part of the motorcycle). Once looped, pass the hook end of the strap through the front safety loop and then attach it to the mounting loop on top of the bag.

Step 3

For securing rear of the bag, loop a securing strap around the turn signals (or another sturdy part of the motorcycle). Once looped, pass the hook end of the strap through the rear safety loop and then attach it to the mounting loop on top of the bag. You may use the included license plate attachment brackets to create more secure rear mounting point (see notes).

Step 4

Repeat the process for the other side and tighten straps to secure the bag.

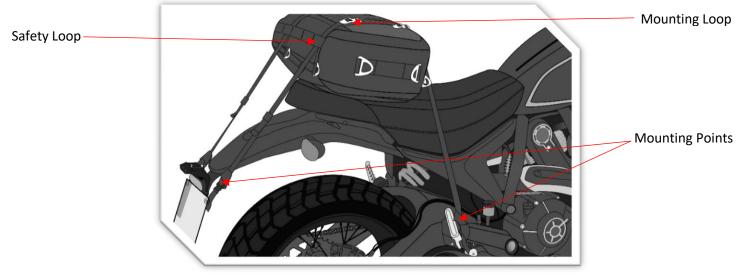



INSTALLATION INSTRUCTIONS

www.vikingbags.com





888-208-1949 | support@vikingbags.com

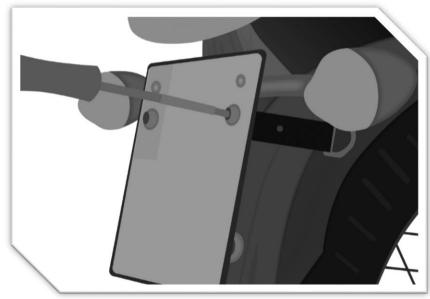


Fig.2

Note:

You may use the included license plate attachment straps (c) to create rear mounting points. The attachment straps can be installed by removing the license plate bolts and reinstalling them with license plate attachment straps sandwiched between the license plate bolt and nut.

- It is important that you either cut away or safely tuck in excess straps so they do not come in contact with any moving part of the bike.
- Do not use any part that is impaired or damaged. If you receive a damaged part, contact our customer service and we will be happy to help.
- ✓ If you are unsure about any installation step, do not install the bags. VikingBags is not responsible for any damage or injury caused by improper mounting or lack of maintenance.
- Regularly check for shifting of the bag and ensure all straps are in good condition and are not loose.
- No part of the bag should be in contact with any moving part of the bike during operation. This includes wheels, drive-train
- We recommend that you seek advice from a trained professional in case you are unsure about mounting of the bags.