

# Viking Sissy Bar Pad For Foldable Sissy Bar:



## Parts:

- i Sissy Bar Pad x 1
- ii Black Mounting Bracket x 2 (Pre-installed)
- iii Chrome Mounting Bracket x 2

## Tools Required:

- i 10mm or Adjustable Wrench


## Note:

- i. The pad comes with black pre-installed mounting brackets. We also include chrome brackets in case you are installing the pad on chrome sissy bars.
- ii. The foldable luggage rack on the sissy bar needs to be folded down/opened in order to install the sissy bar pad.

## Instructions:

### Step 1

Loosen the bolts holding the 2 mounting brackets to the pad and slide the sissy bar uprights between the brackets and the pad as shown in Fig 1.

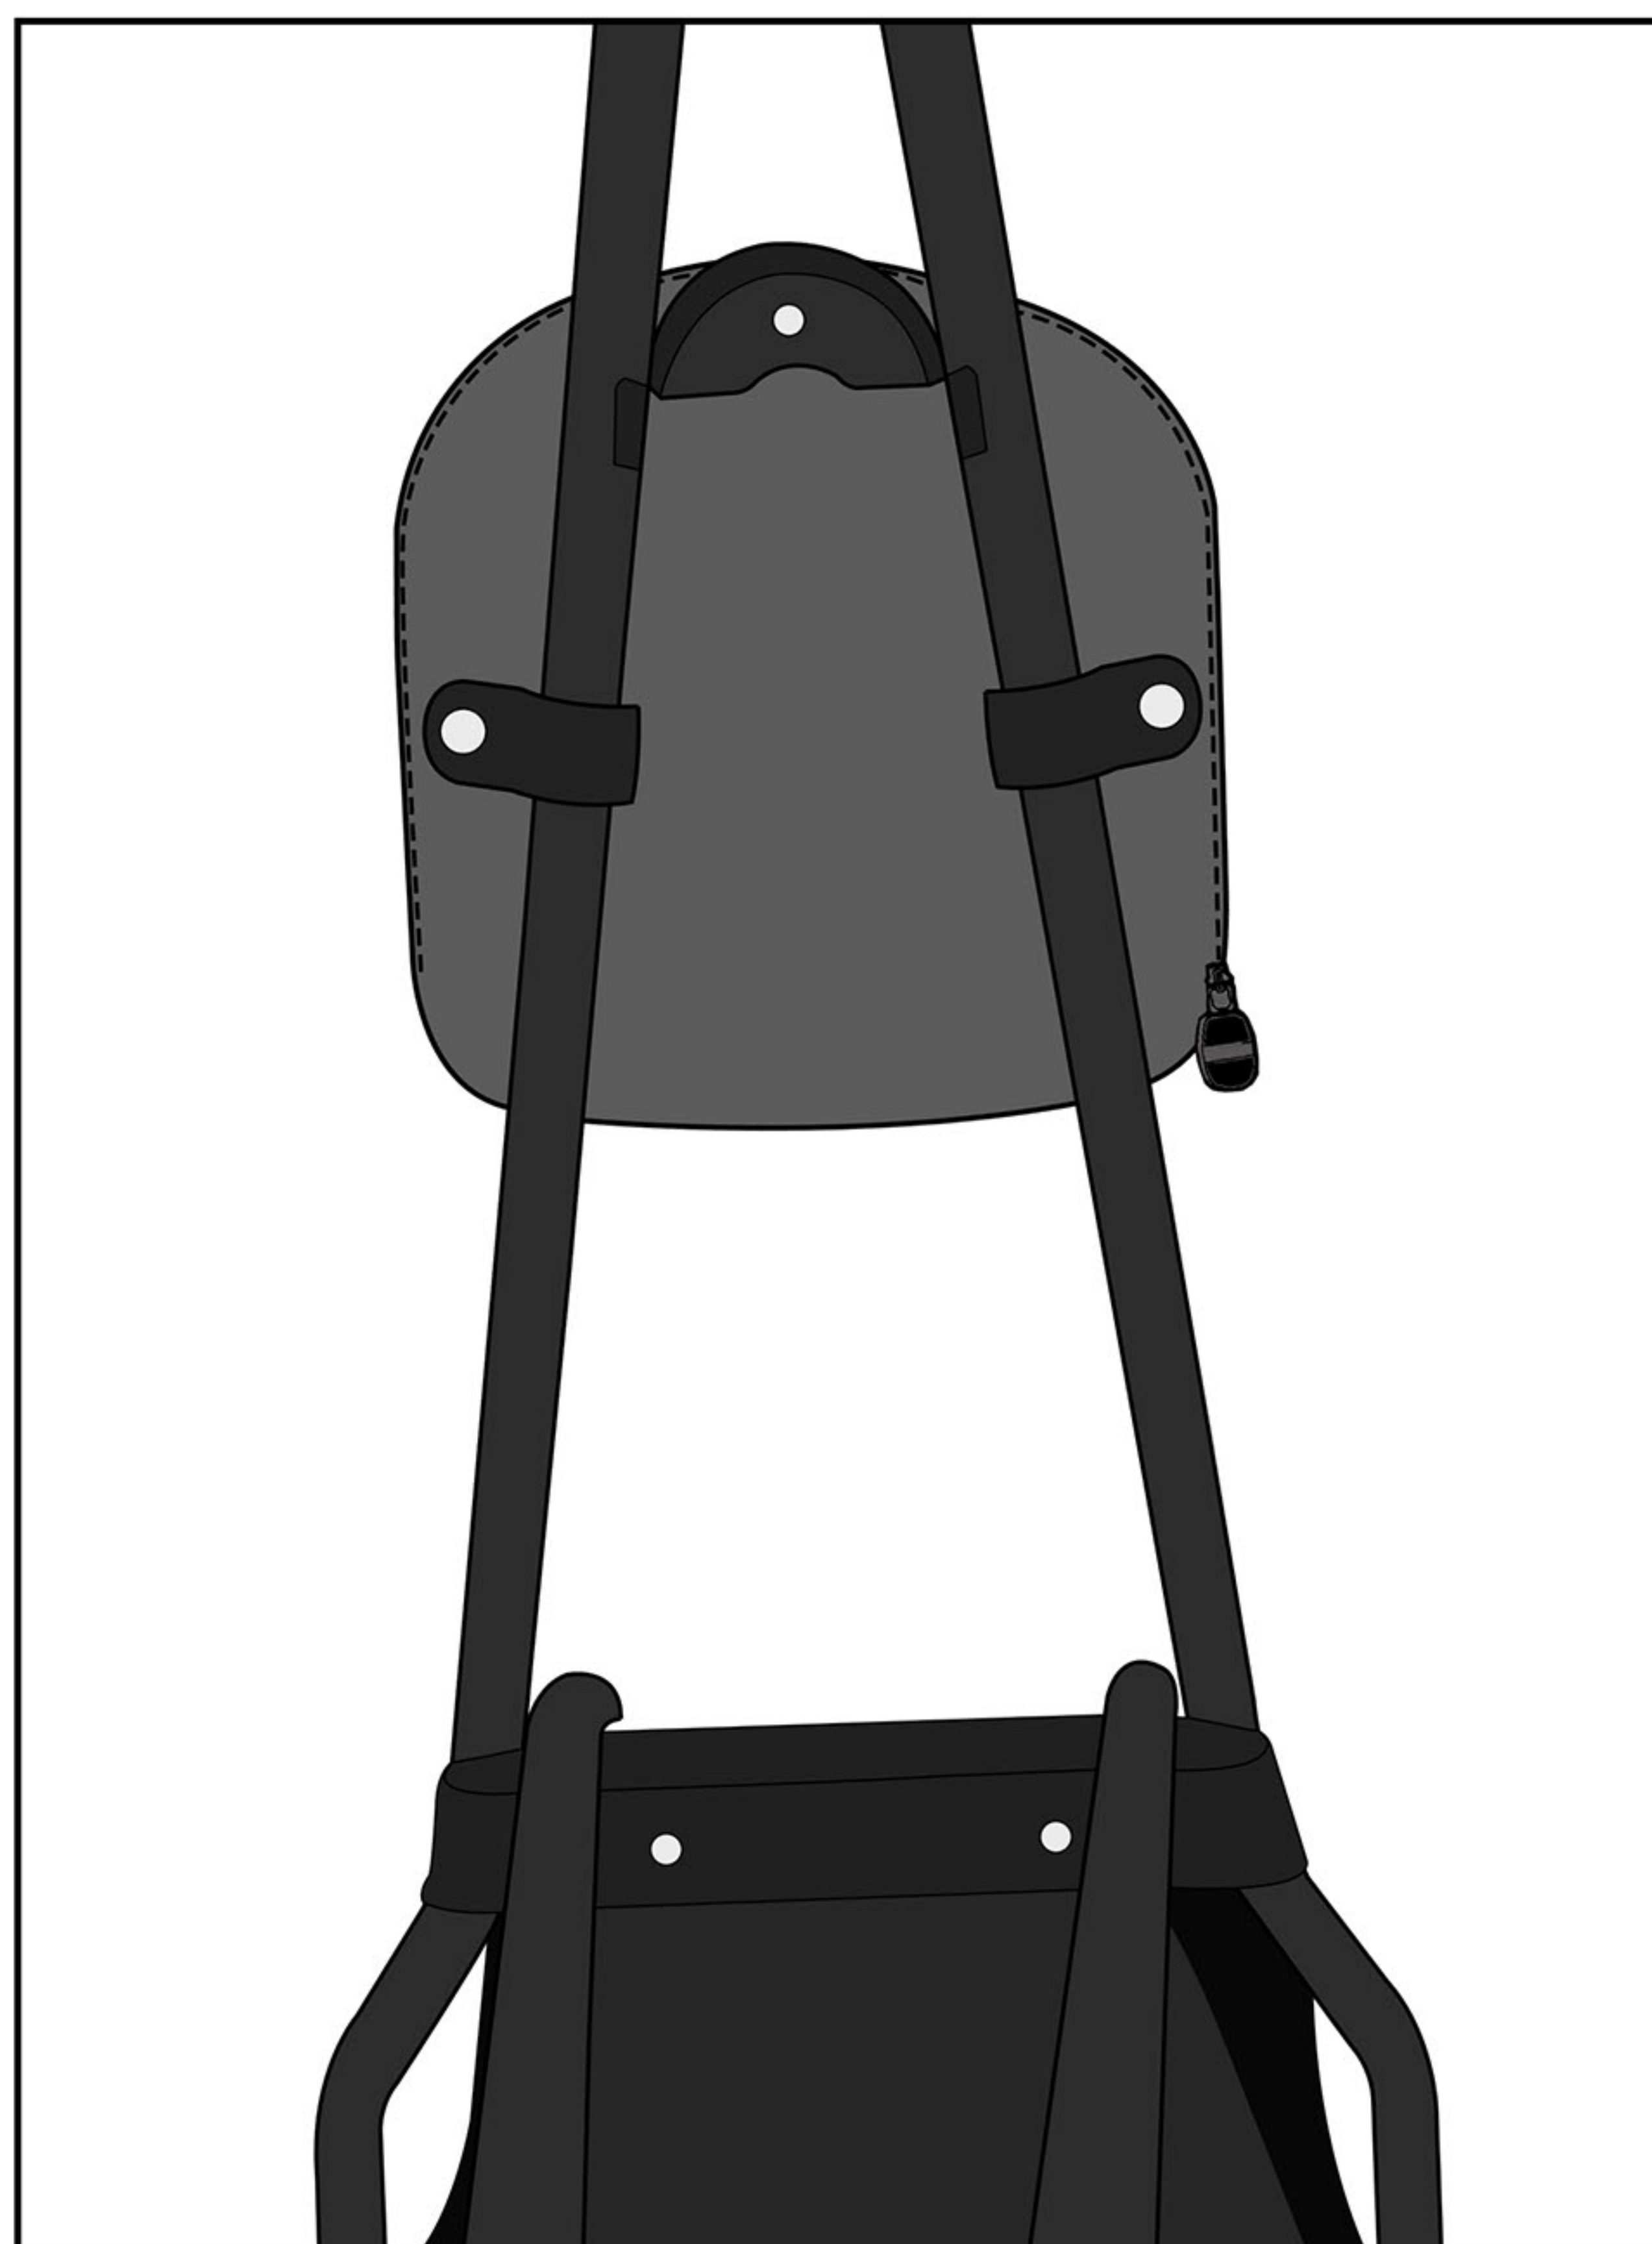


(Fig 1) Mounting Brackets Installed

### Step 2

Once you find a suitable position, tighten the bolts using a 10 mm combination wrench.




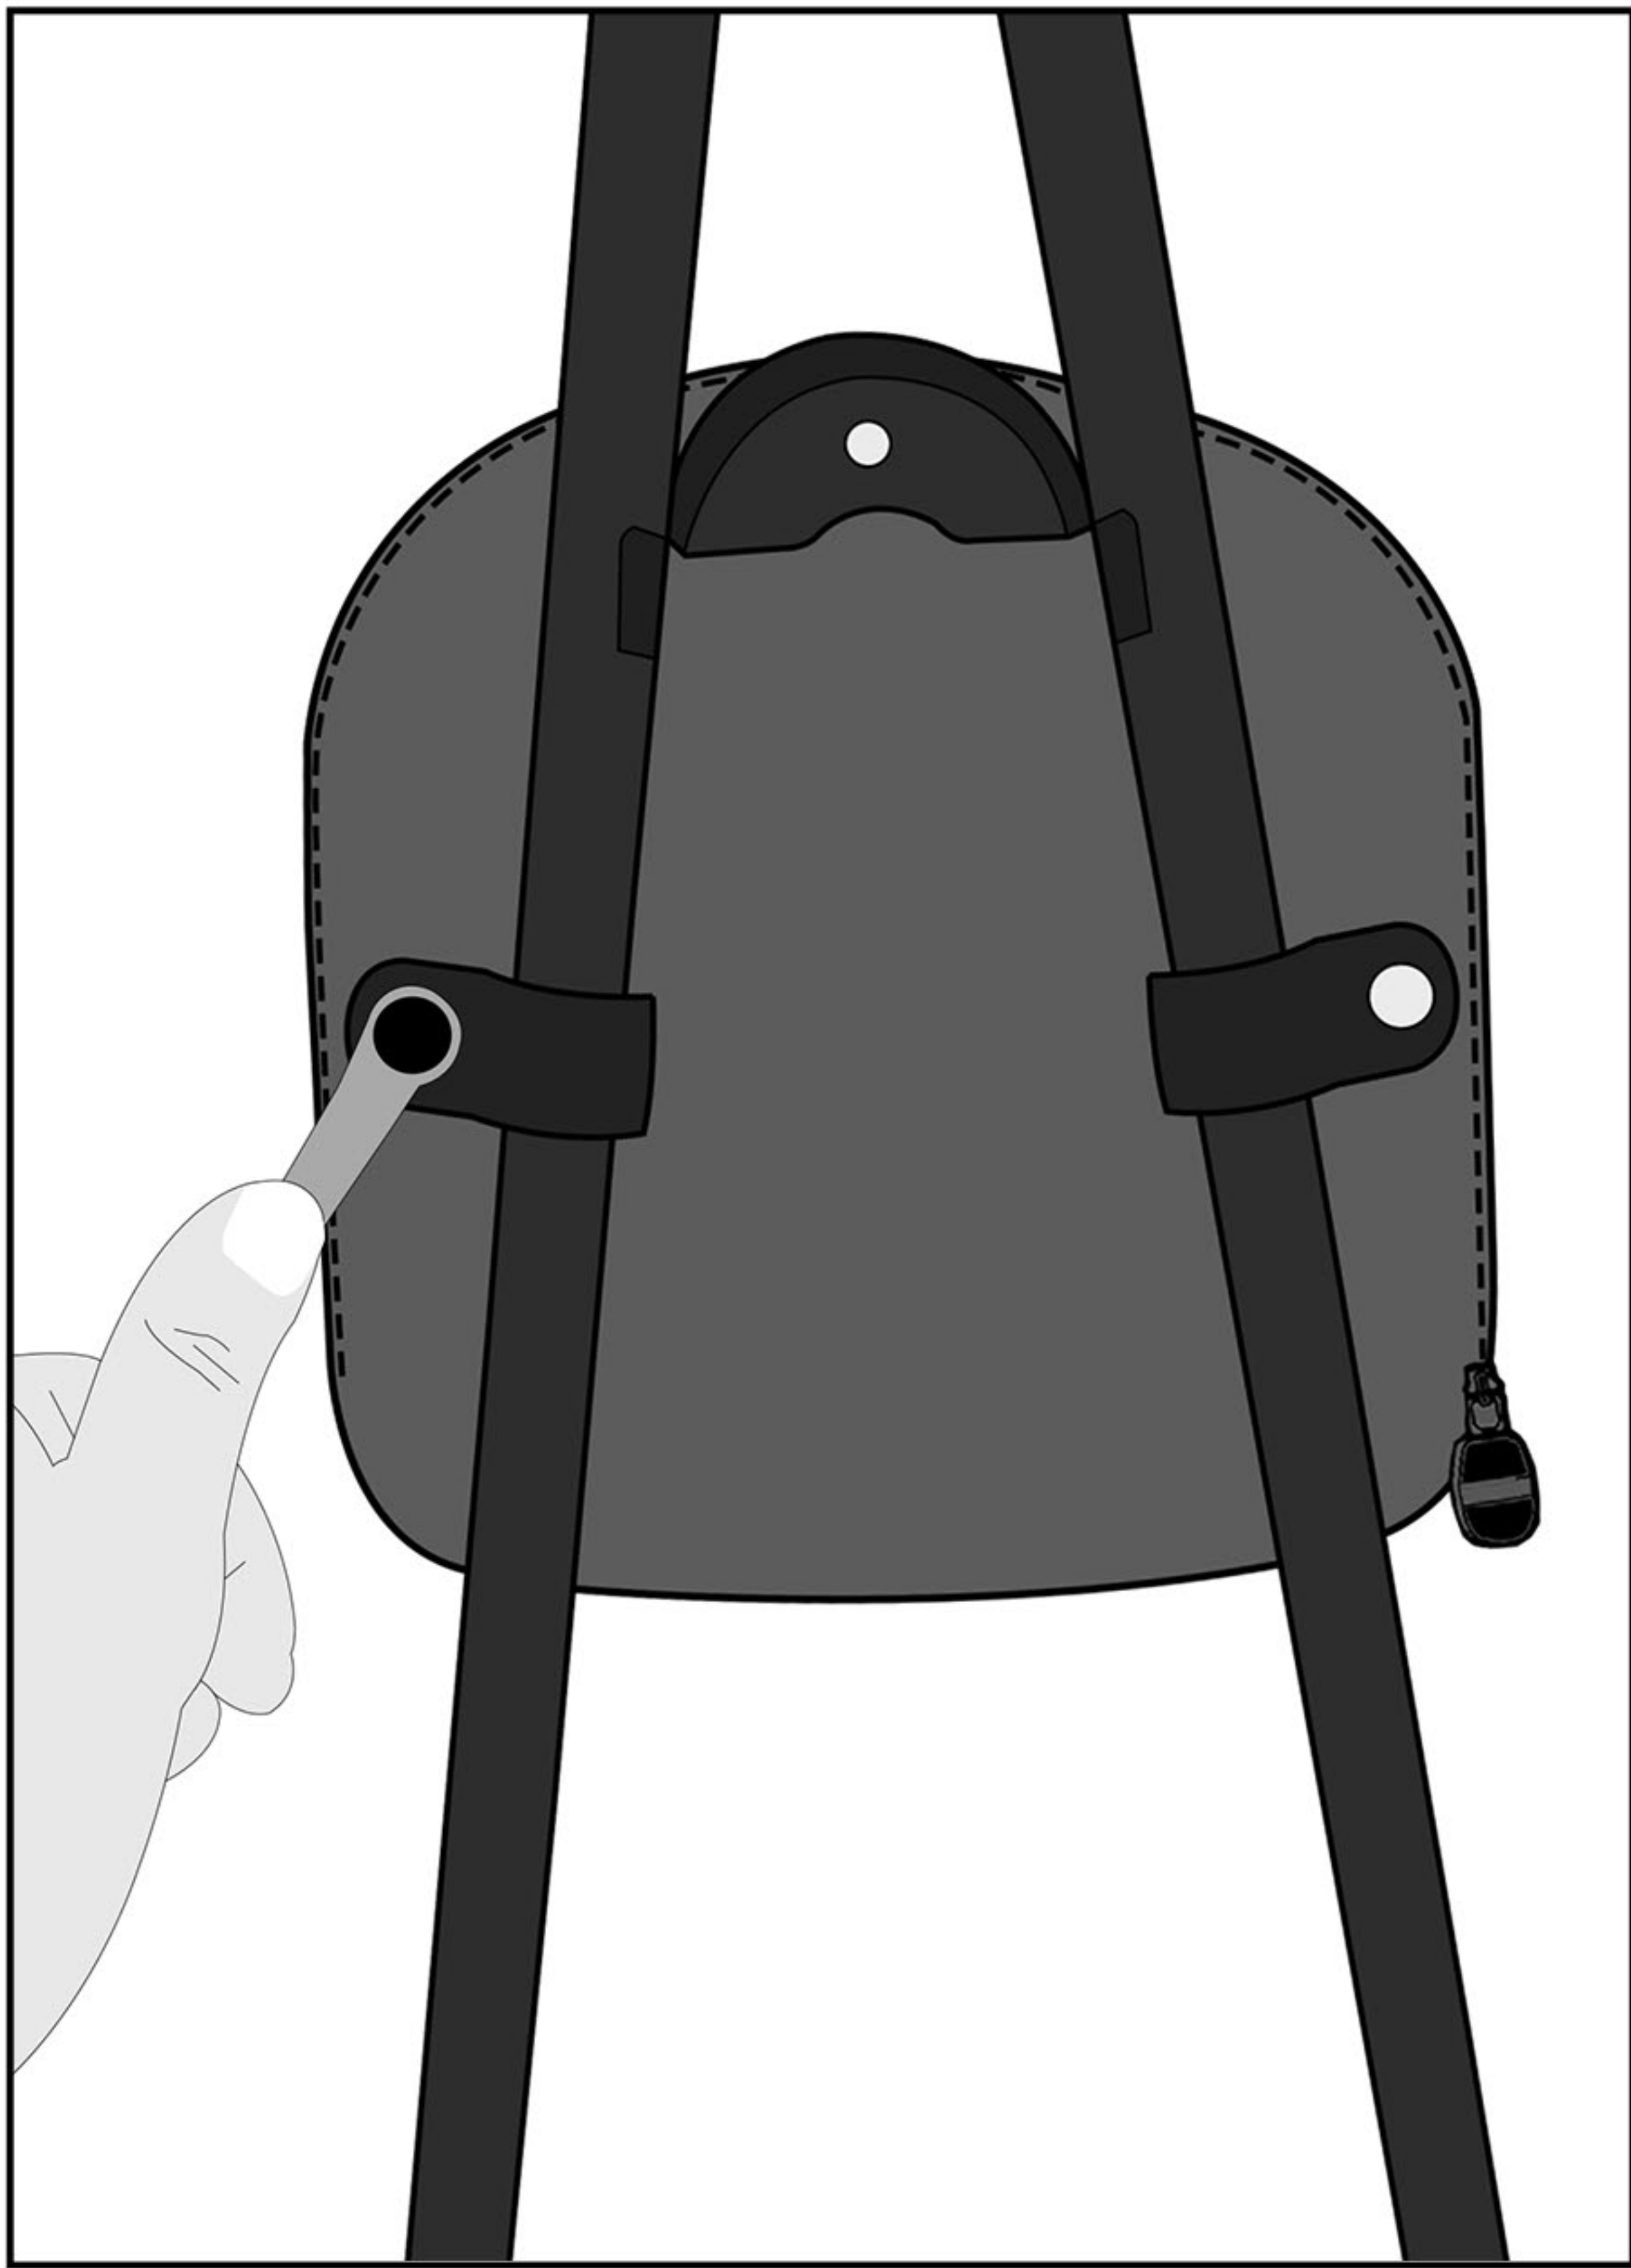

**(Fig 2) Tightening Mounting Bolts**

### **Step 3**

Ensure the pad is securely installed and does not wiggle.

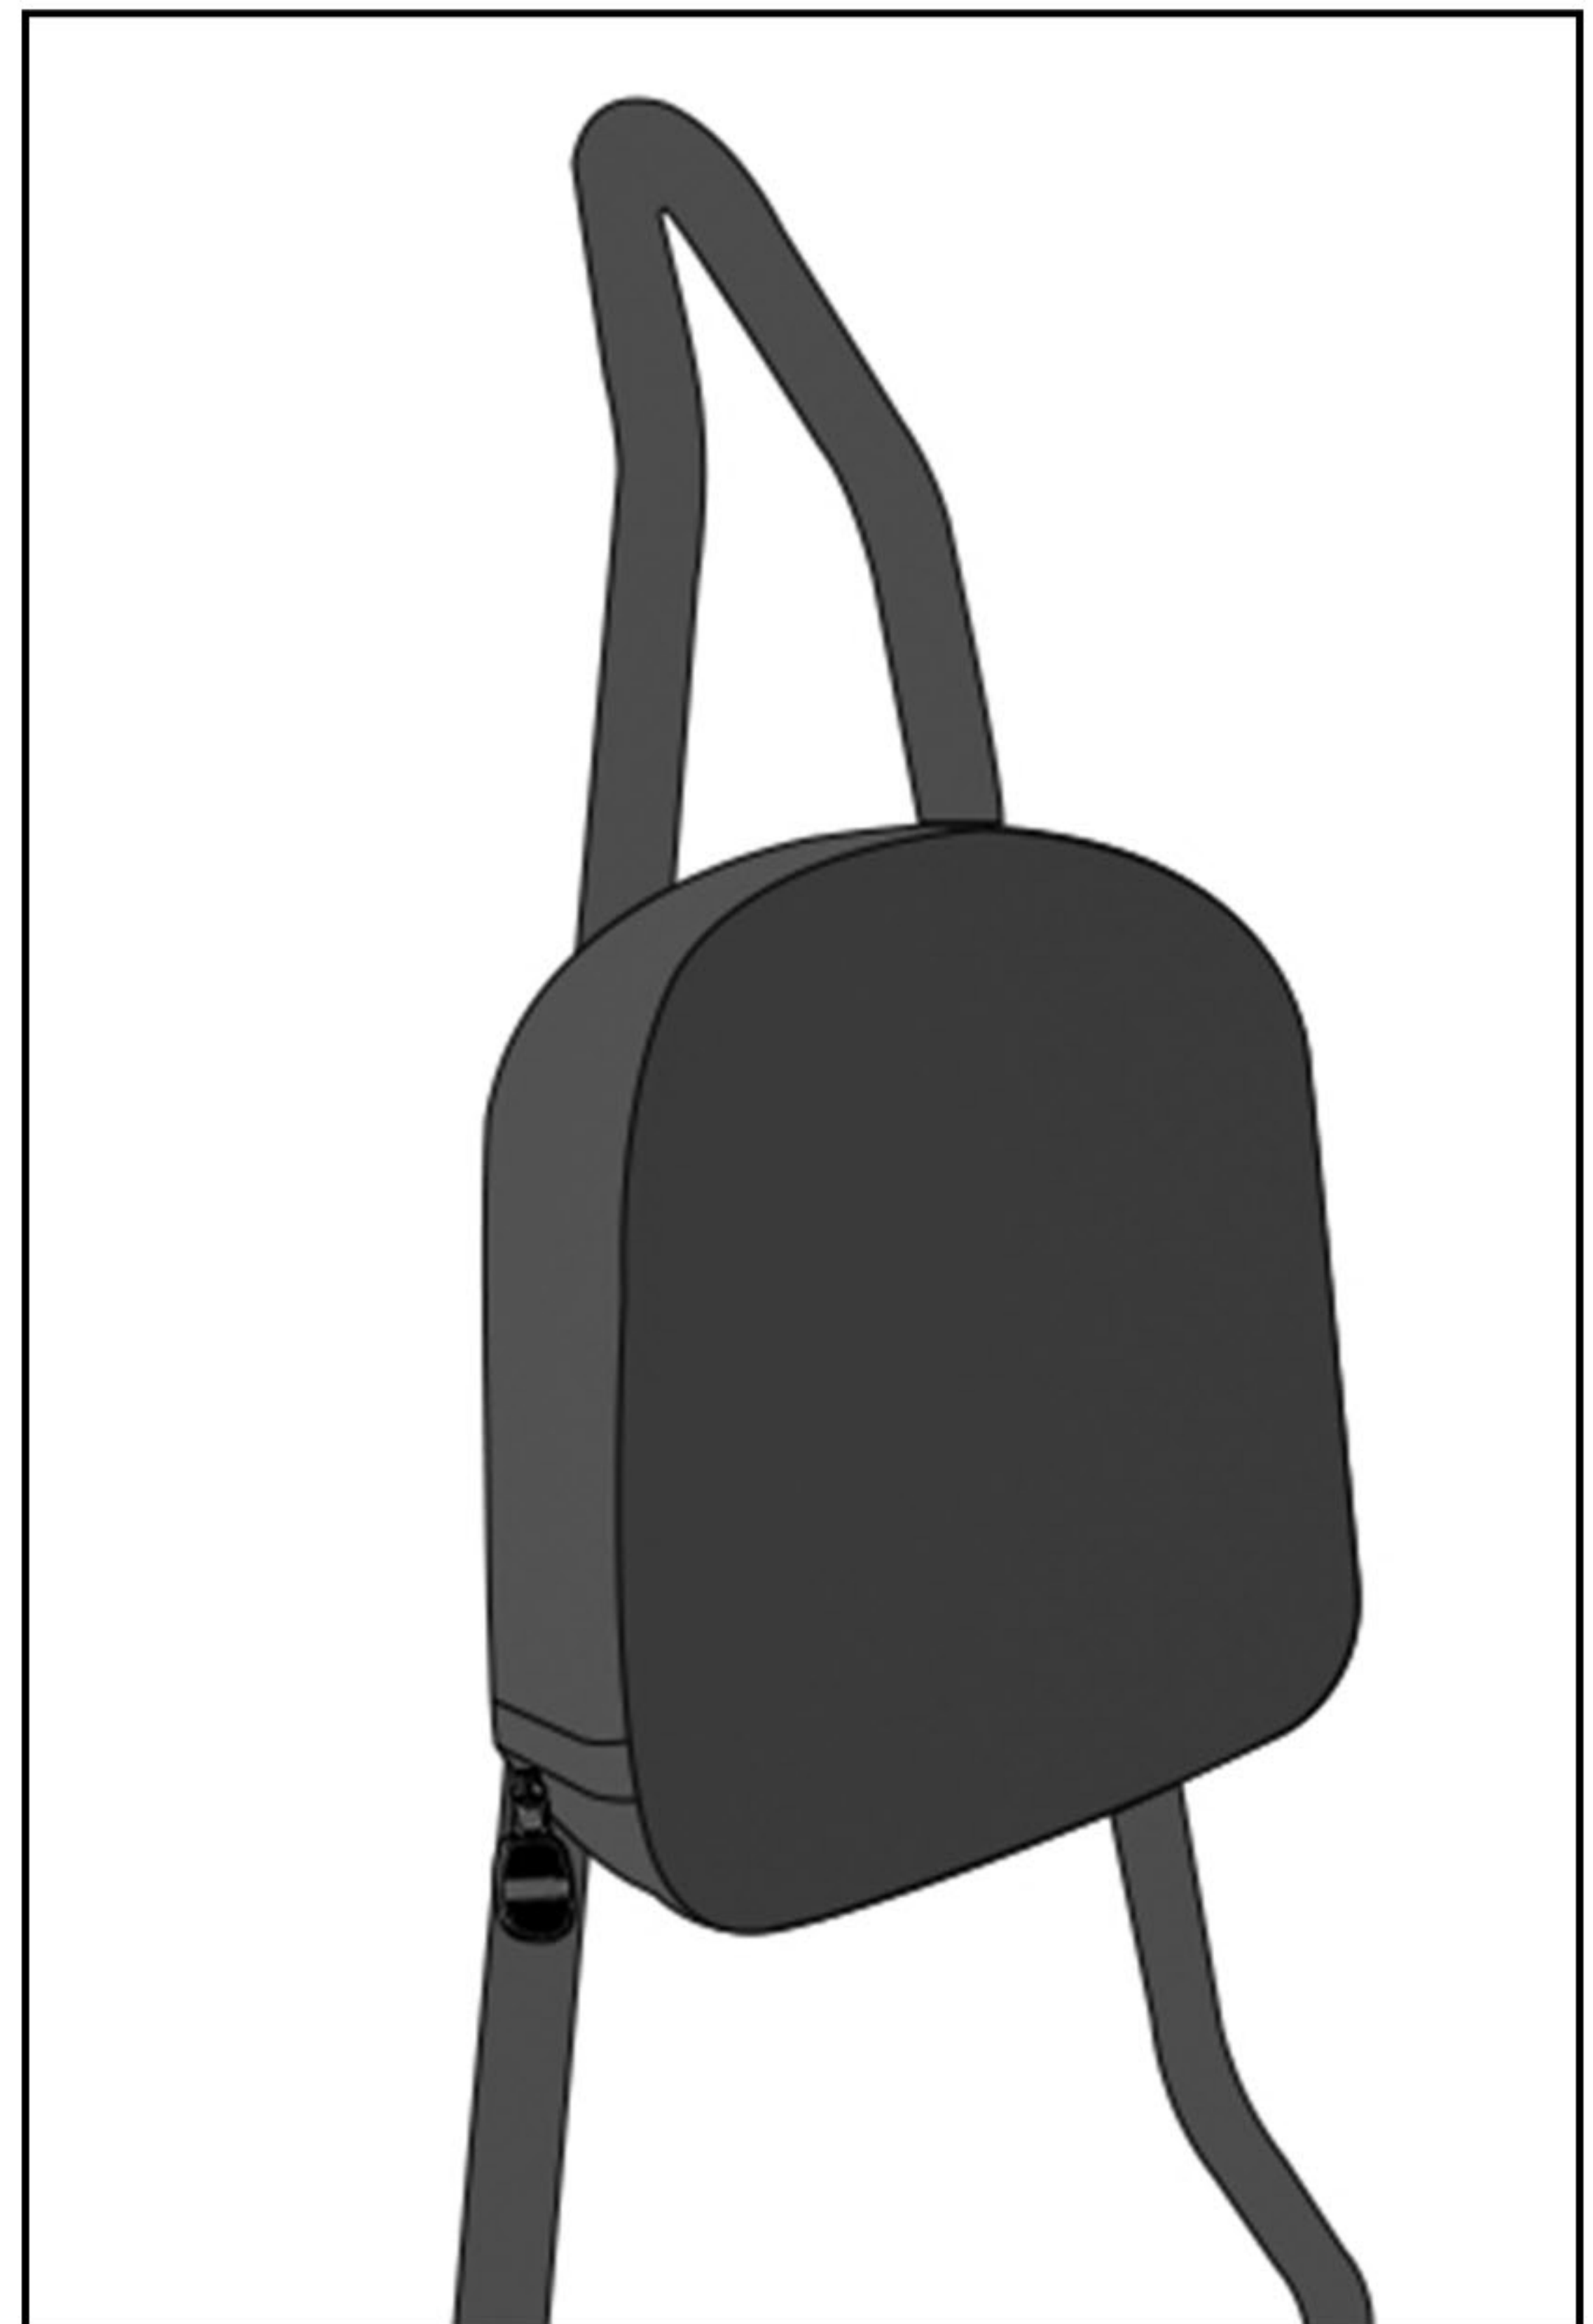

**(Fig 3) Installed Sissy Bar Pad**

### **Warnings !**

- Avoid using any mounting part that is impaired or not working properly.
- Periodically check the installed product to ensure all bolts are tight.
- Do not install the product if you are unsure about any of the installation steps.
- Viking Bags is not responsible for any damage caused by improper use of the product.