

# Viking Odyssey 80L Luggage System Installation Guide:



## Parts:

i	Odyssey Luggage System 80L Harness	x1
ii	25L Dry Bag	x2
iii	Tailpack 22L	x1
iv	Backup Pocket 4L	x2
v	Heatshield	x1
vi	Blind Nuts	x20
vii	6mm Bolts	x20
viii	Washer	x20
ix	Zip Ties	x4
x	Tent Pole Bag	x1

## Tools Needed:

- i Screw Driver

## Tip:

- i Apply Loctite to ensure proper installation of bolts.
- ii Read the installation instructions carefully and make sure that all parts under the parts list are included.

## Parts Diagram:


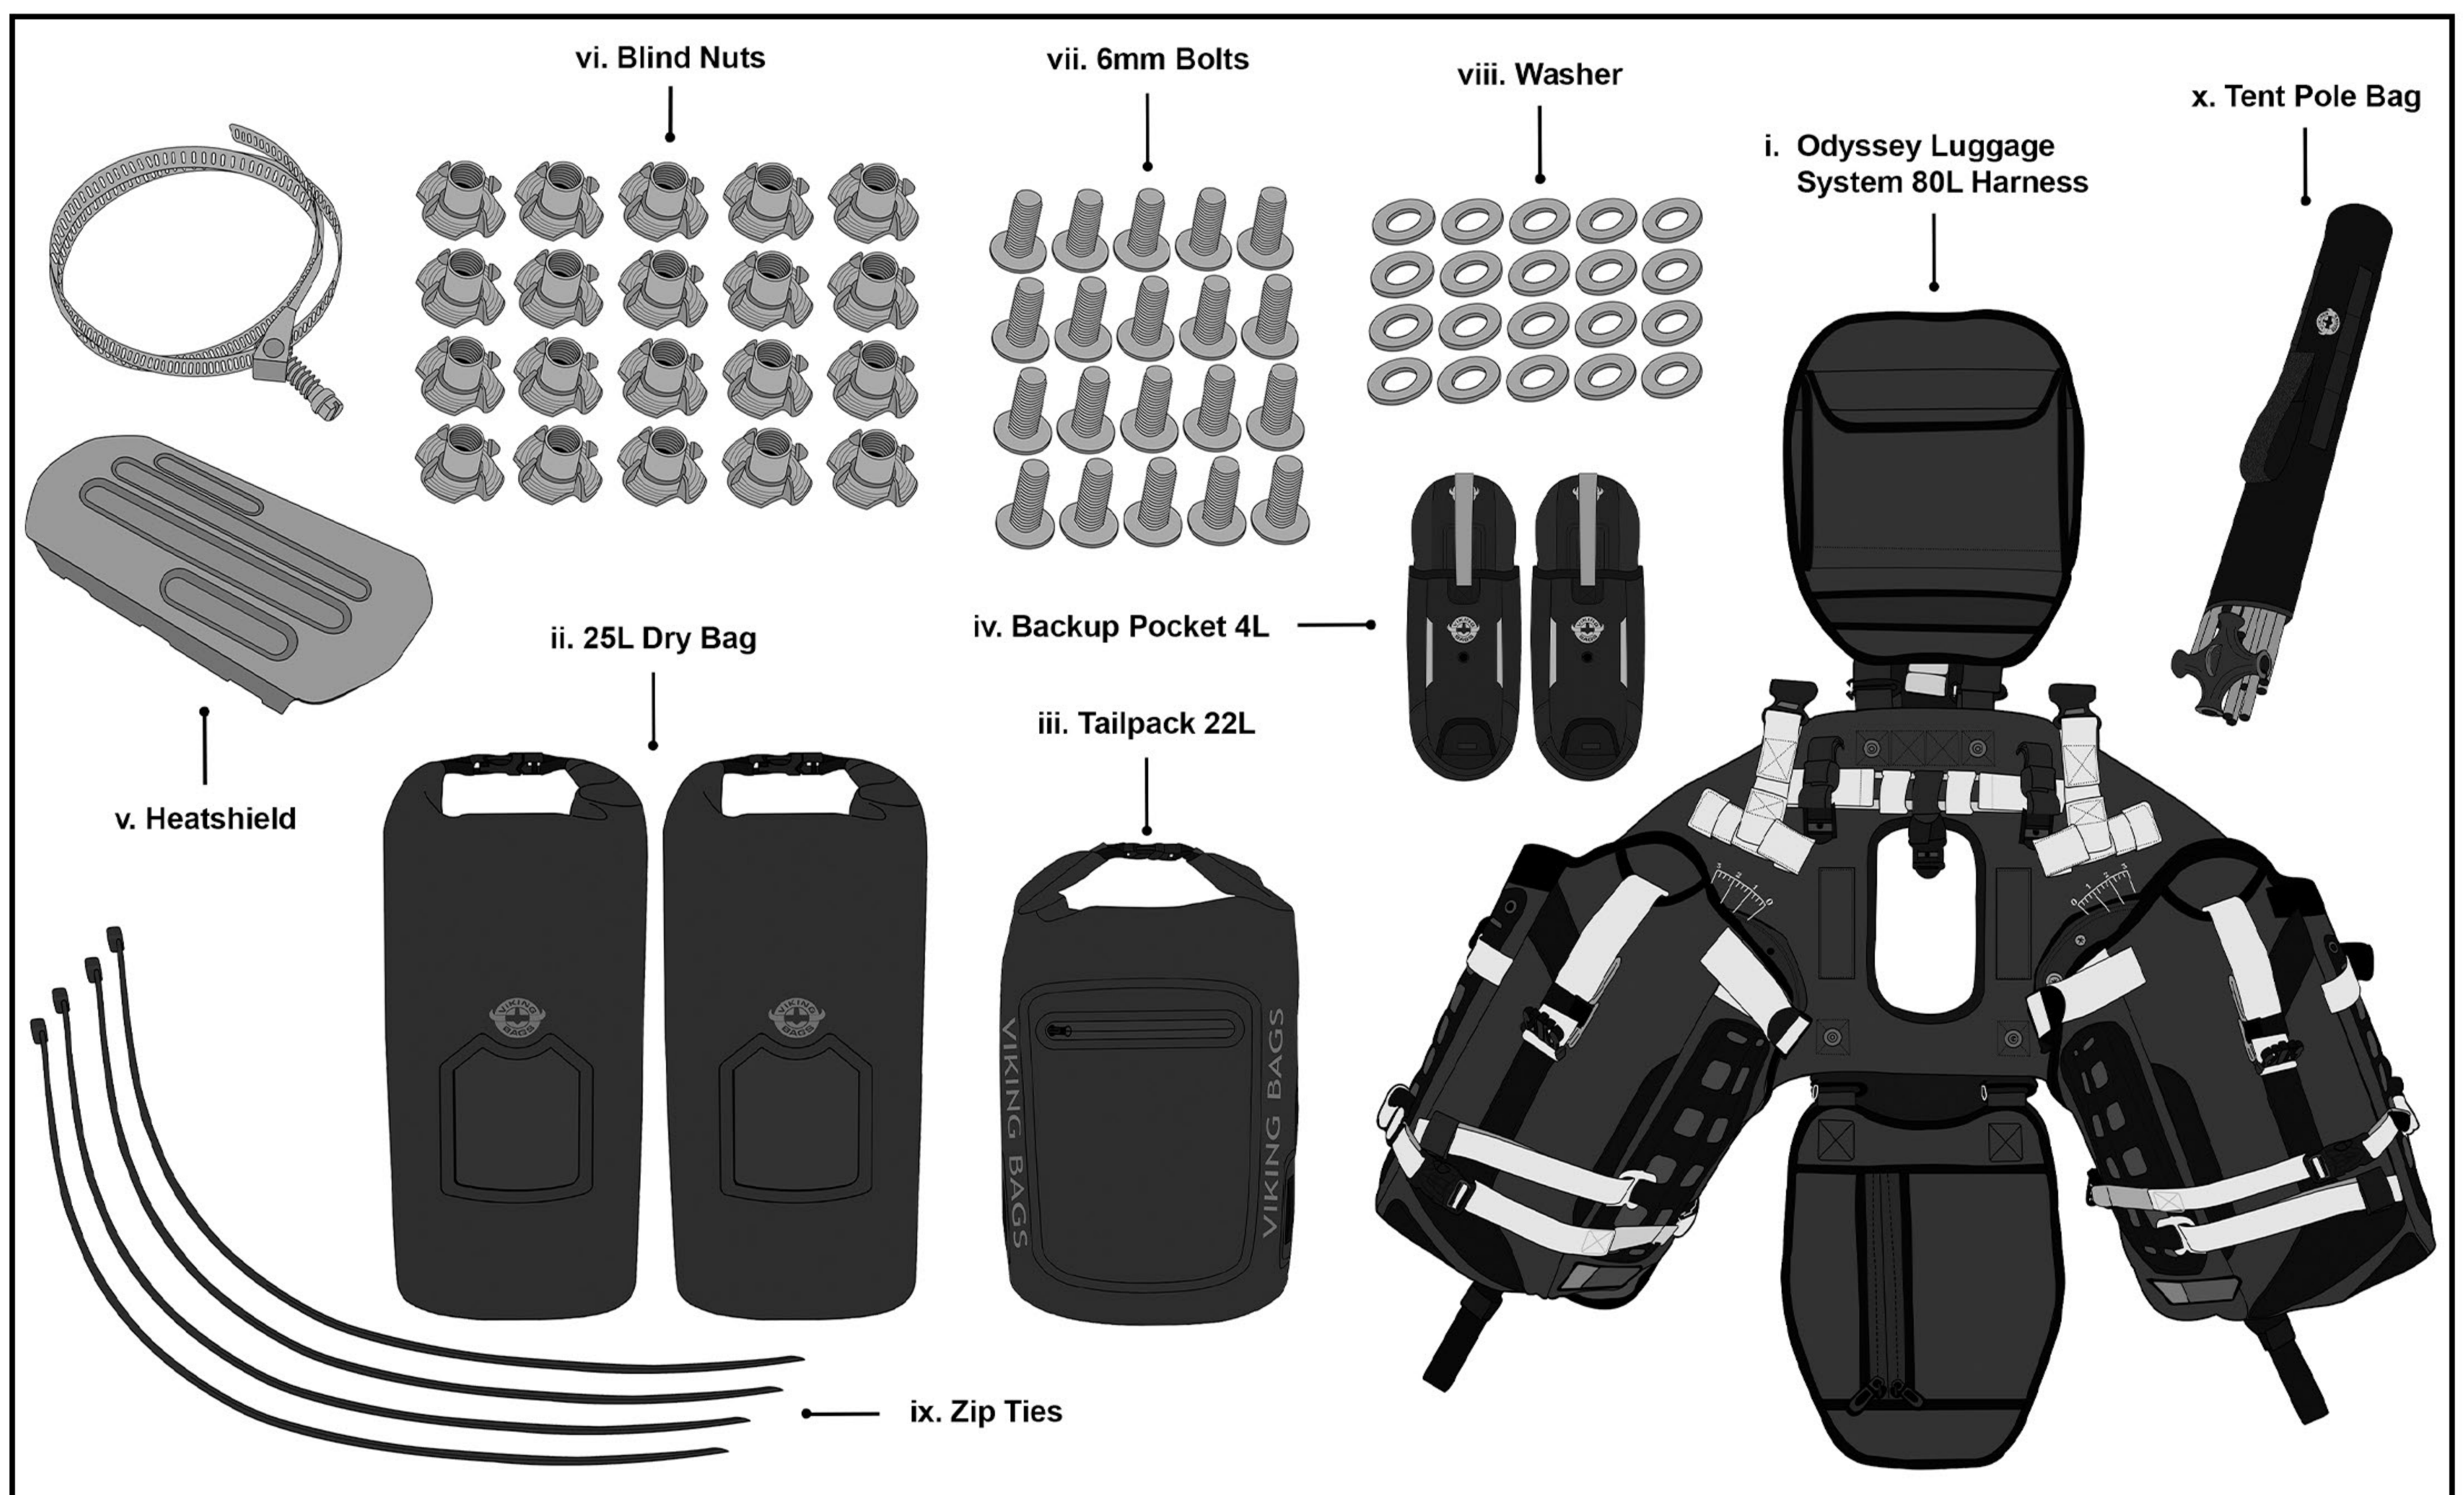


Fig 1. Parts List

## Instructions:

### Step 1:


Put your Odyssey 80 luggage System Harness on a flat surface. Insert two 6mm bolts(VII), blind nuts(VI), and washers(VIII) onto the center of the detachable legs. Do not fully tighten, keep the bolts loose. See Fig 1.

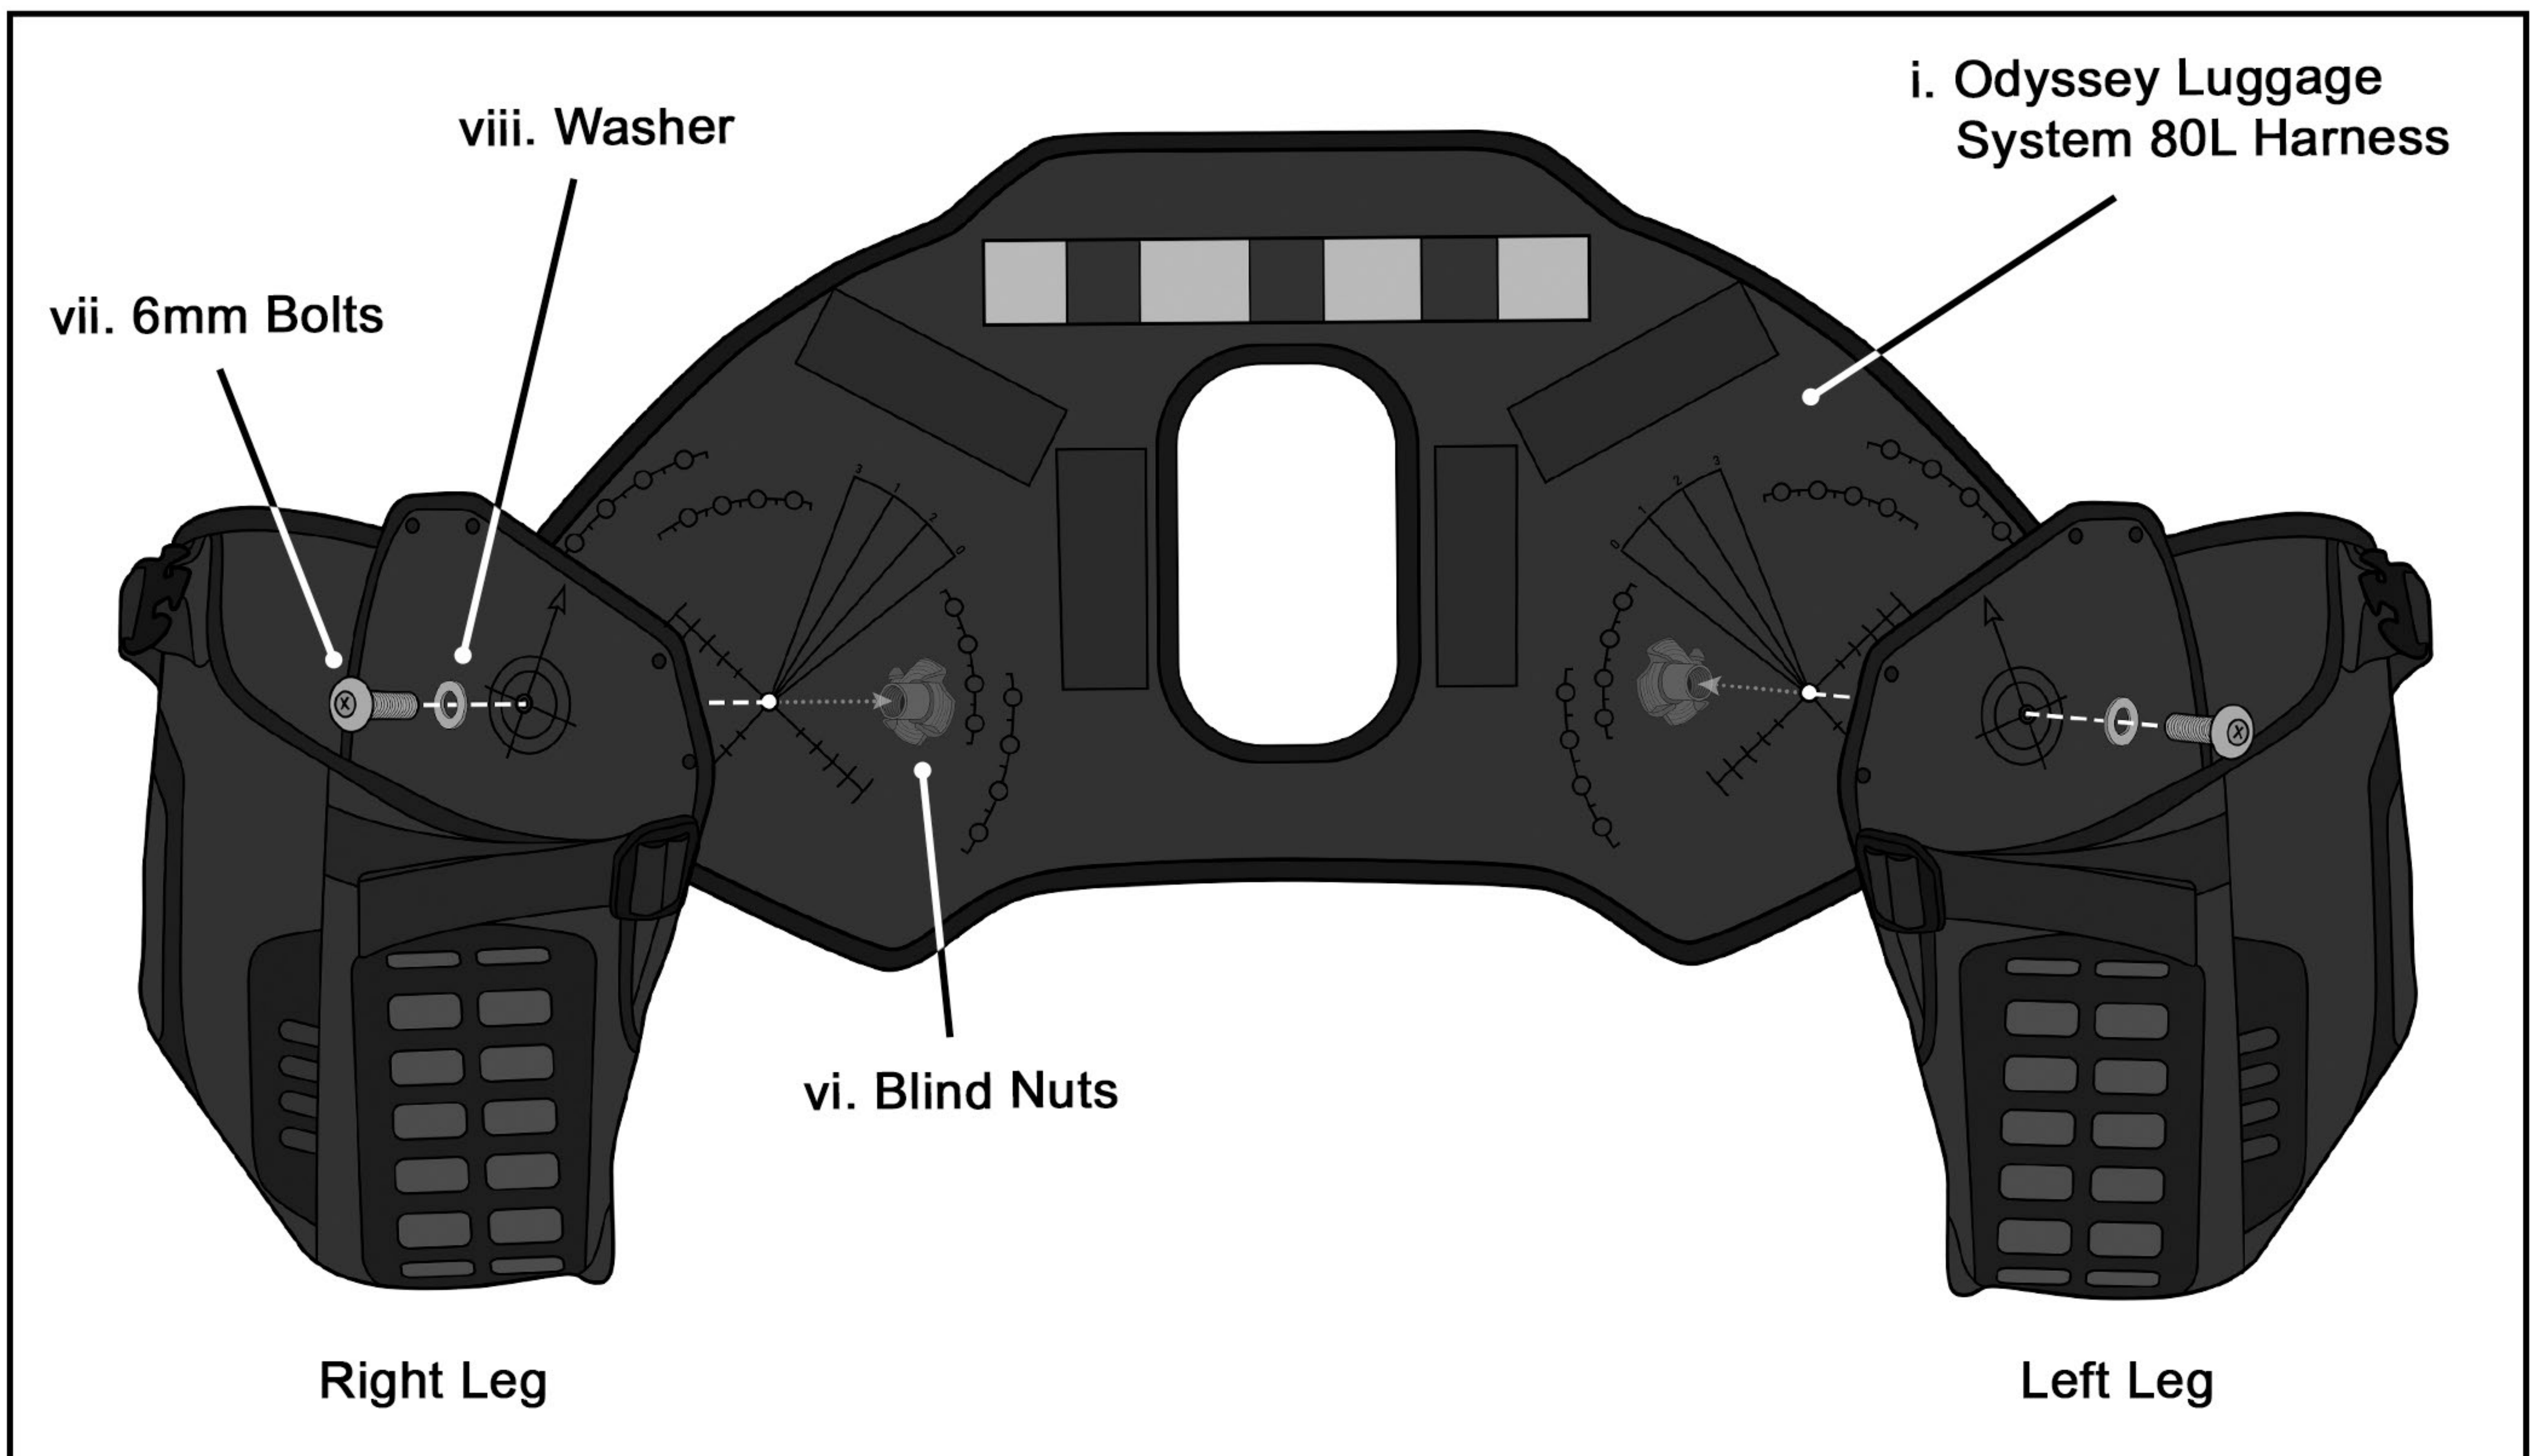

**Fig 1. Attaching the legs to the harness**

**Step 2:**


Place the luggage system on your motorcycle's rear and find a suitable position. Then rotate the legs to your desired angle. See Fig 2.

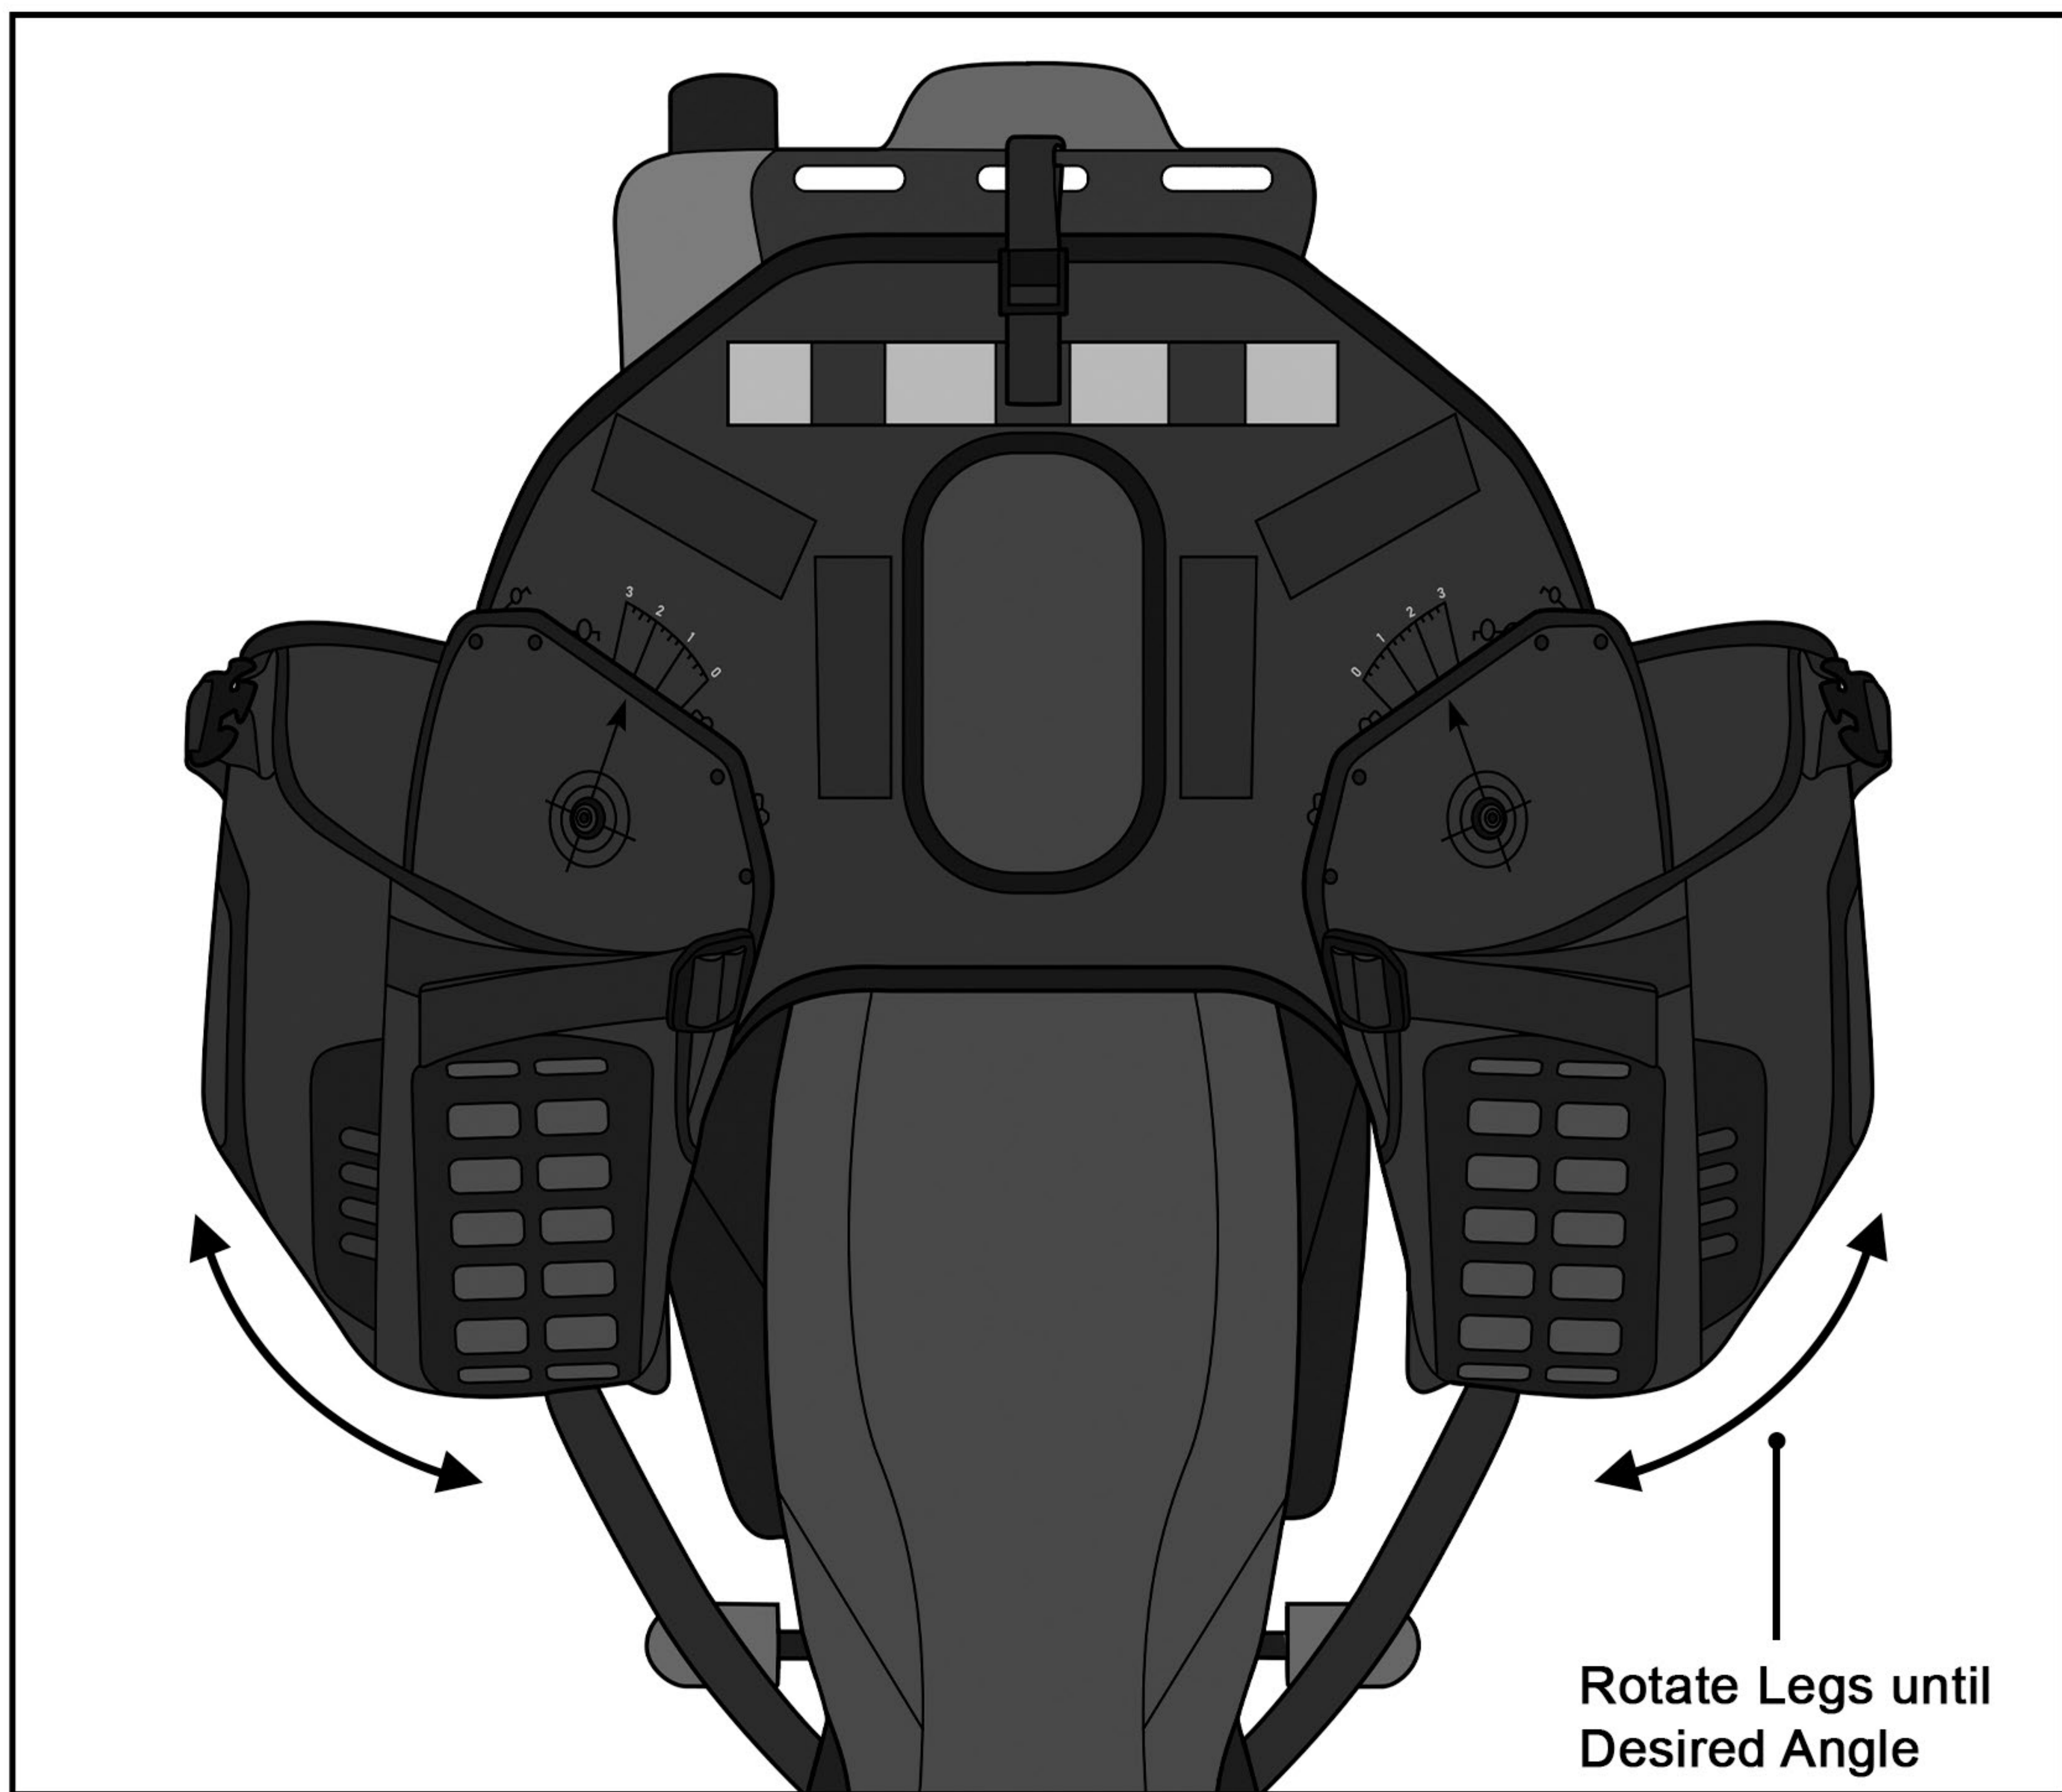

**Fig 2. Adjusting the legs to your specific bike**

### Step 3:


Once you know your desired angle. Take the luggage system on a flat surface and add the rest of the blind nuts(VI), washers(VIII), and 6mm bolts(VII). See Fig 3.

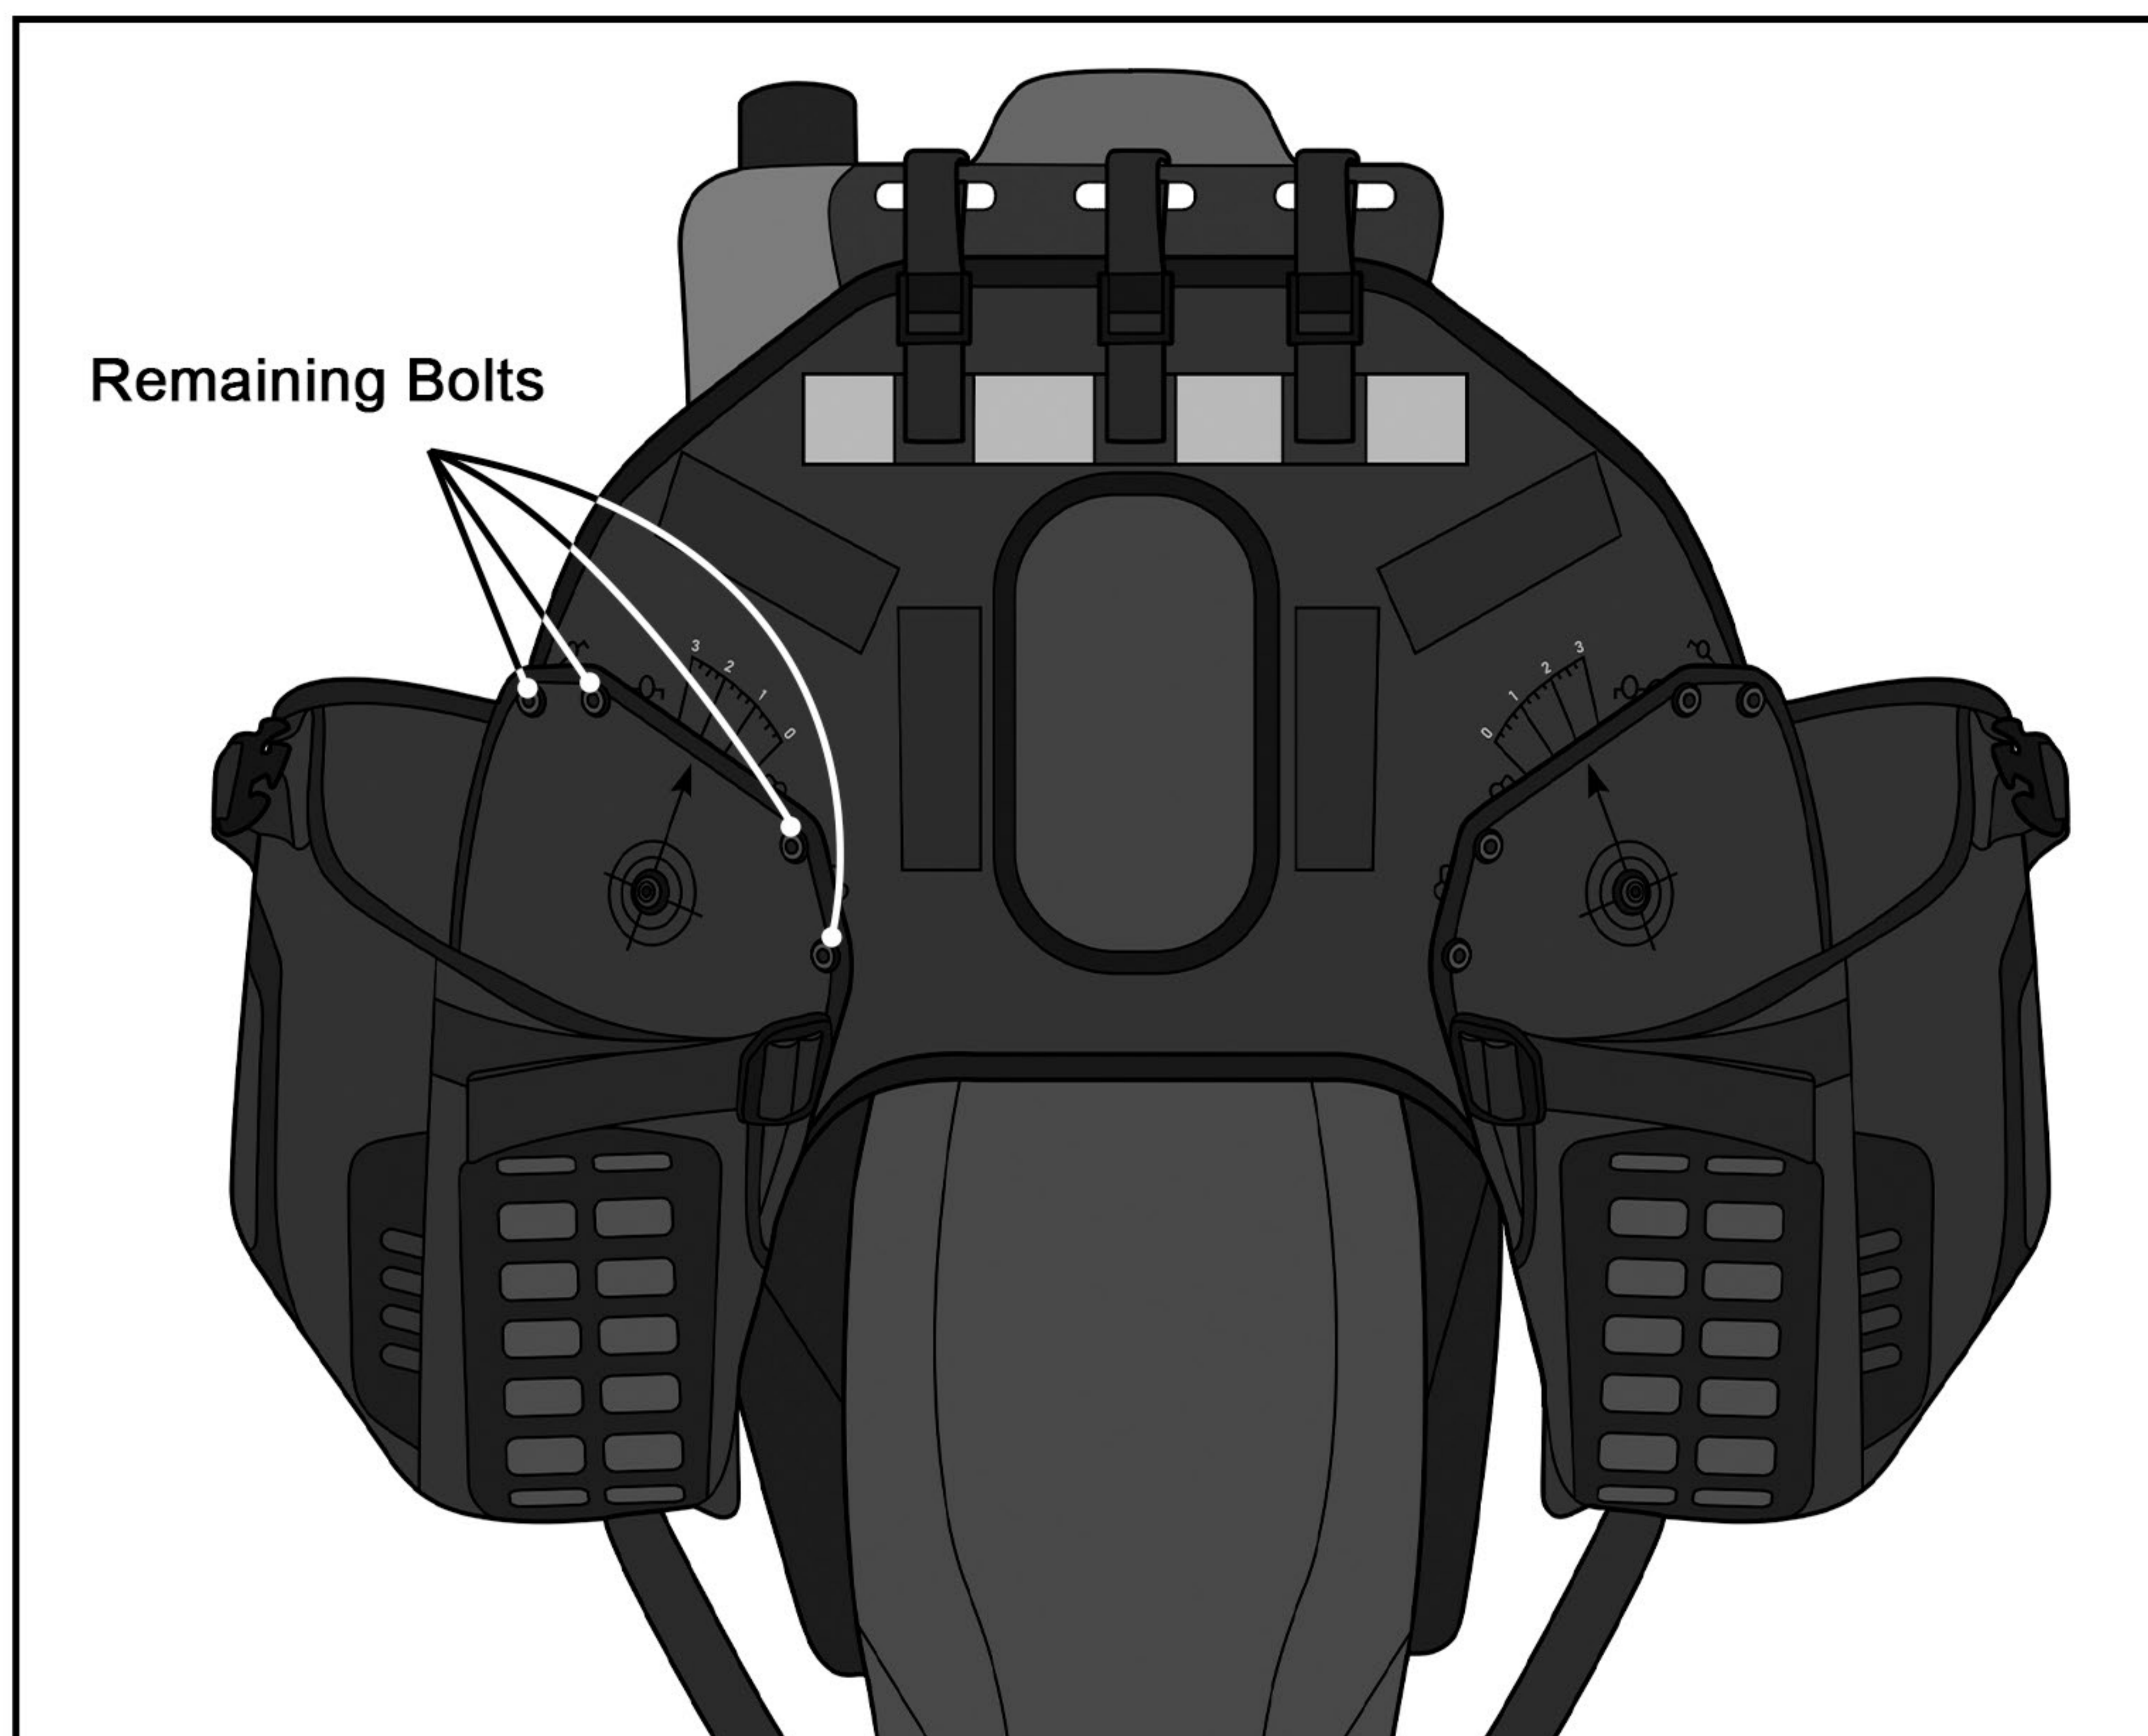


**Fig 3. Installing the remaining bolts**

### Step 4:

Complete the installation of the Odyssey Luggage System 80L to your bike by passing the three rear straps through your luggage rack slots or other rear tubing of the motorcycle. Once wrapped, buckle the straps and roll the extra length of the straps using the strap keeper. See Fig 4. and Fig 5.

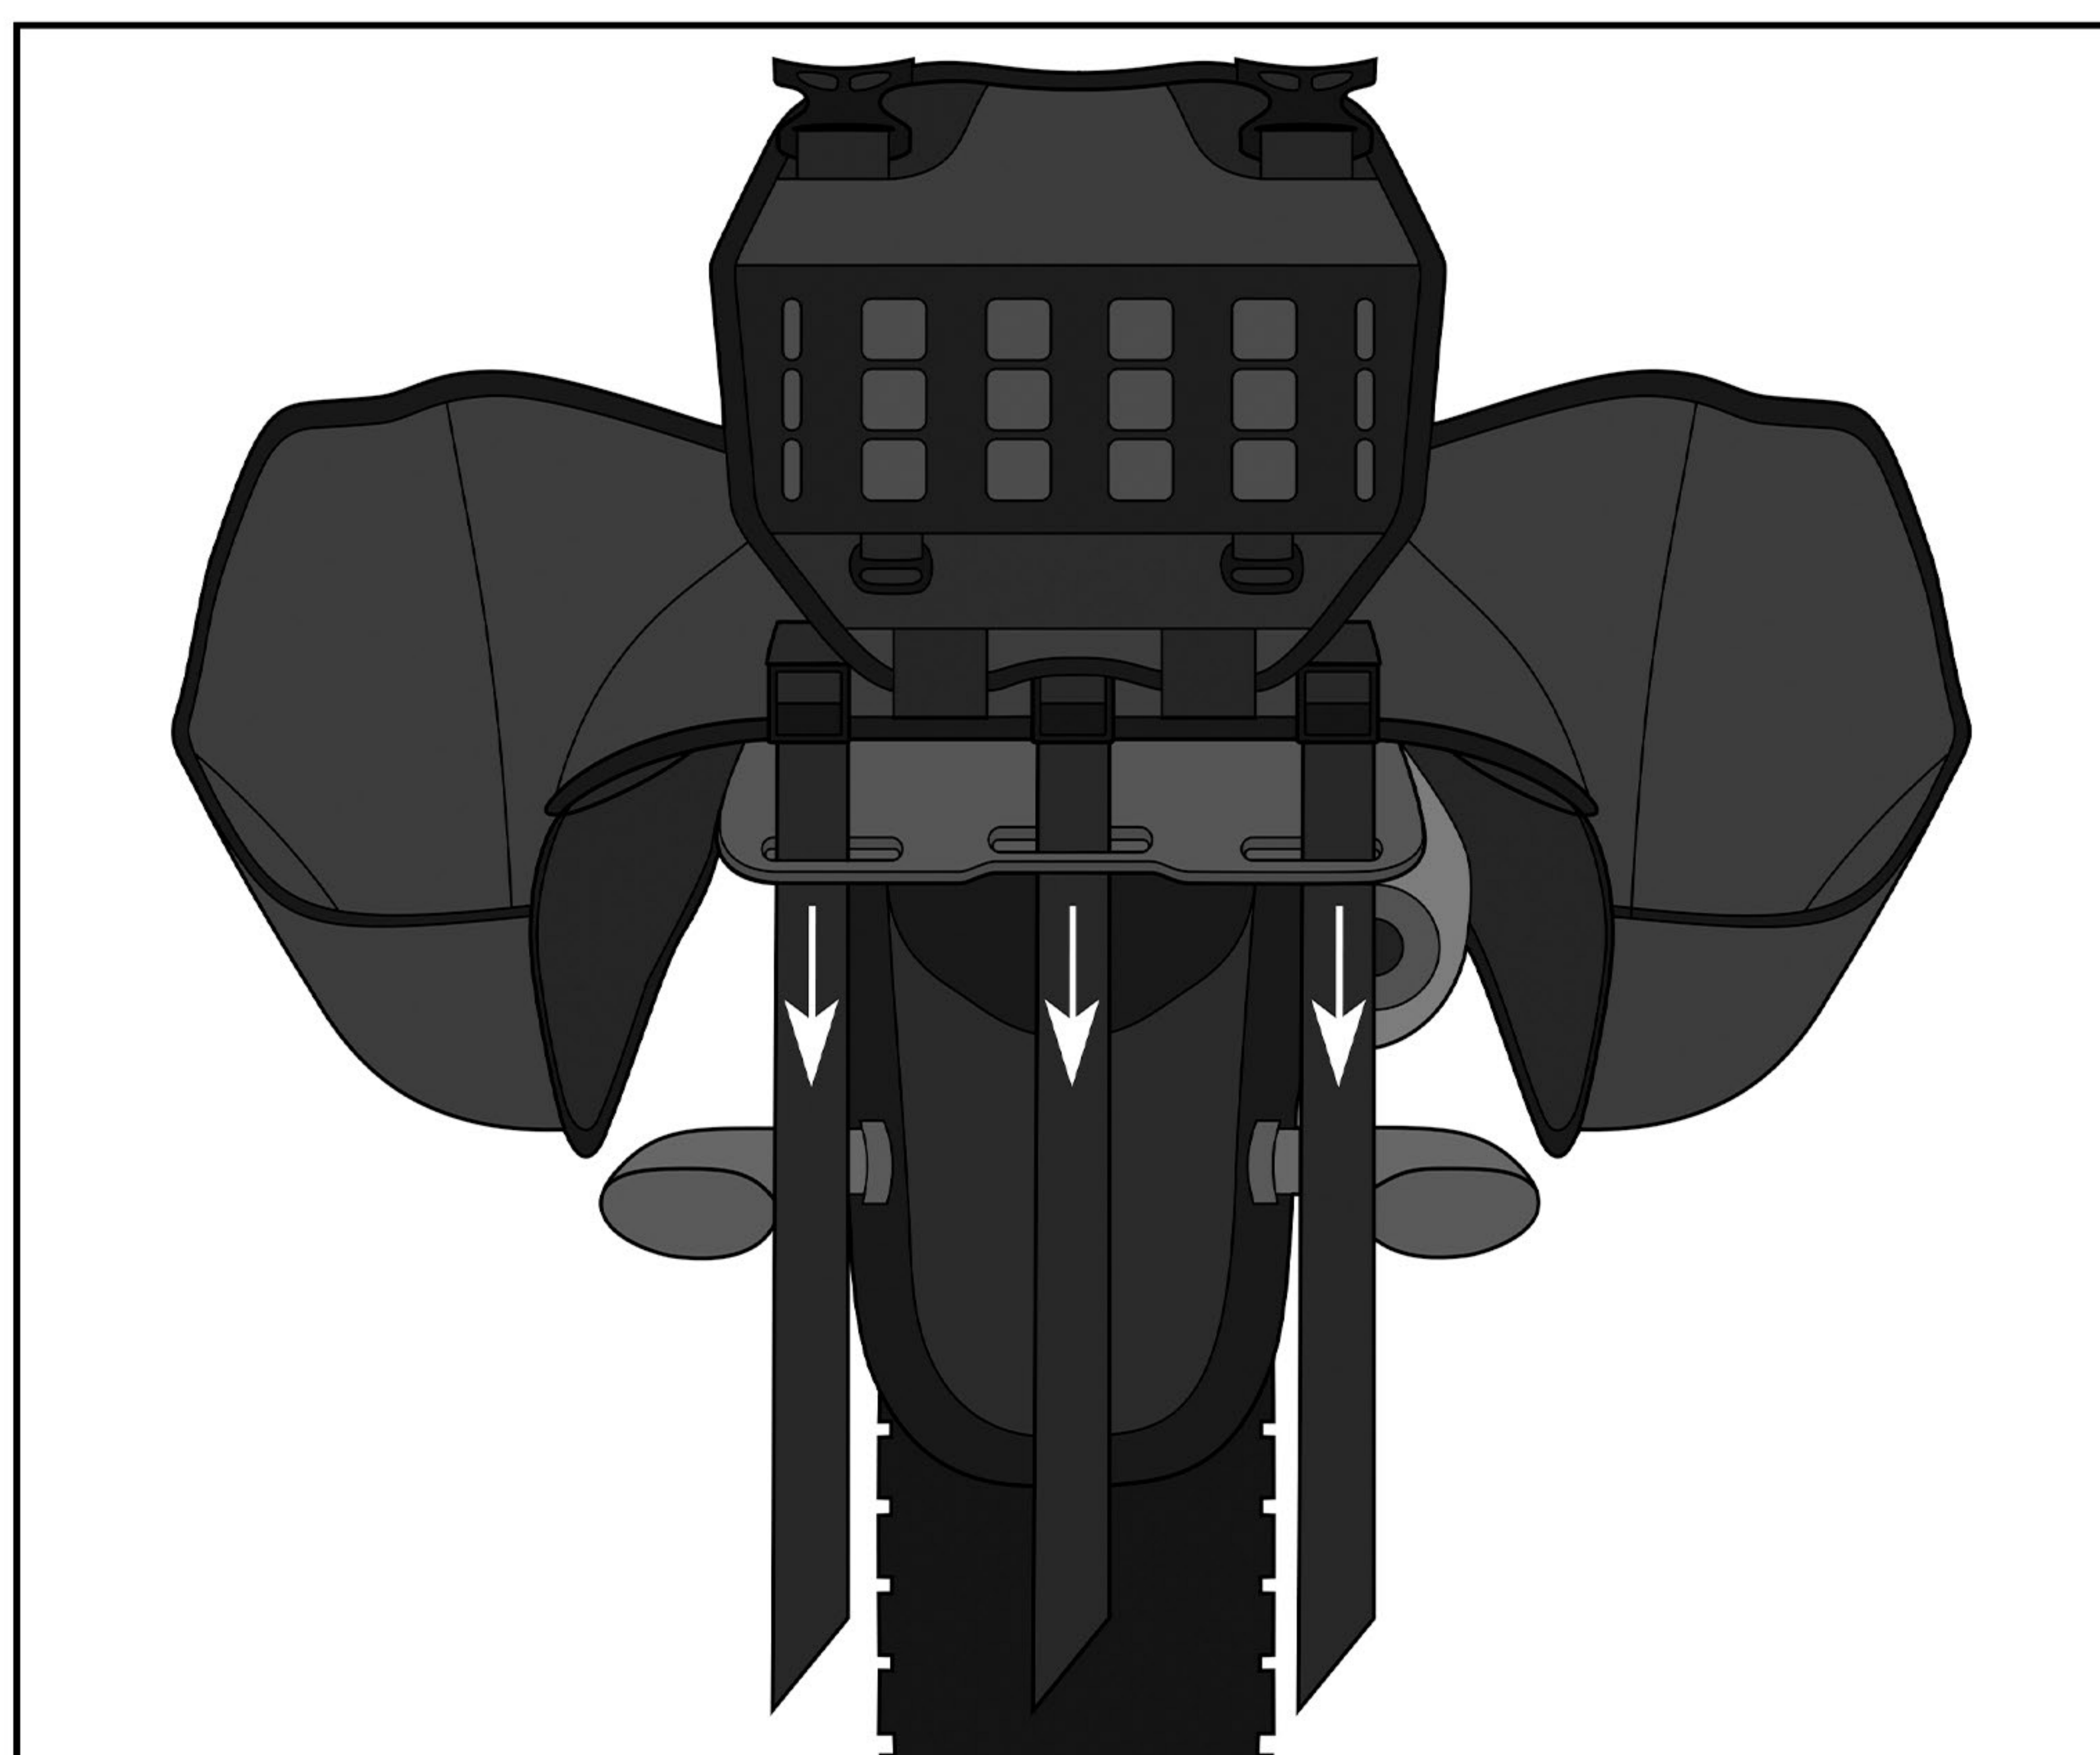


**Fig 4. Securing the rear straps**

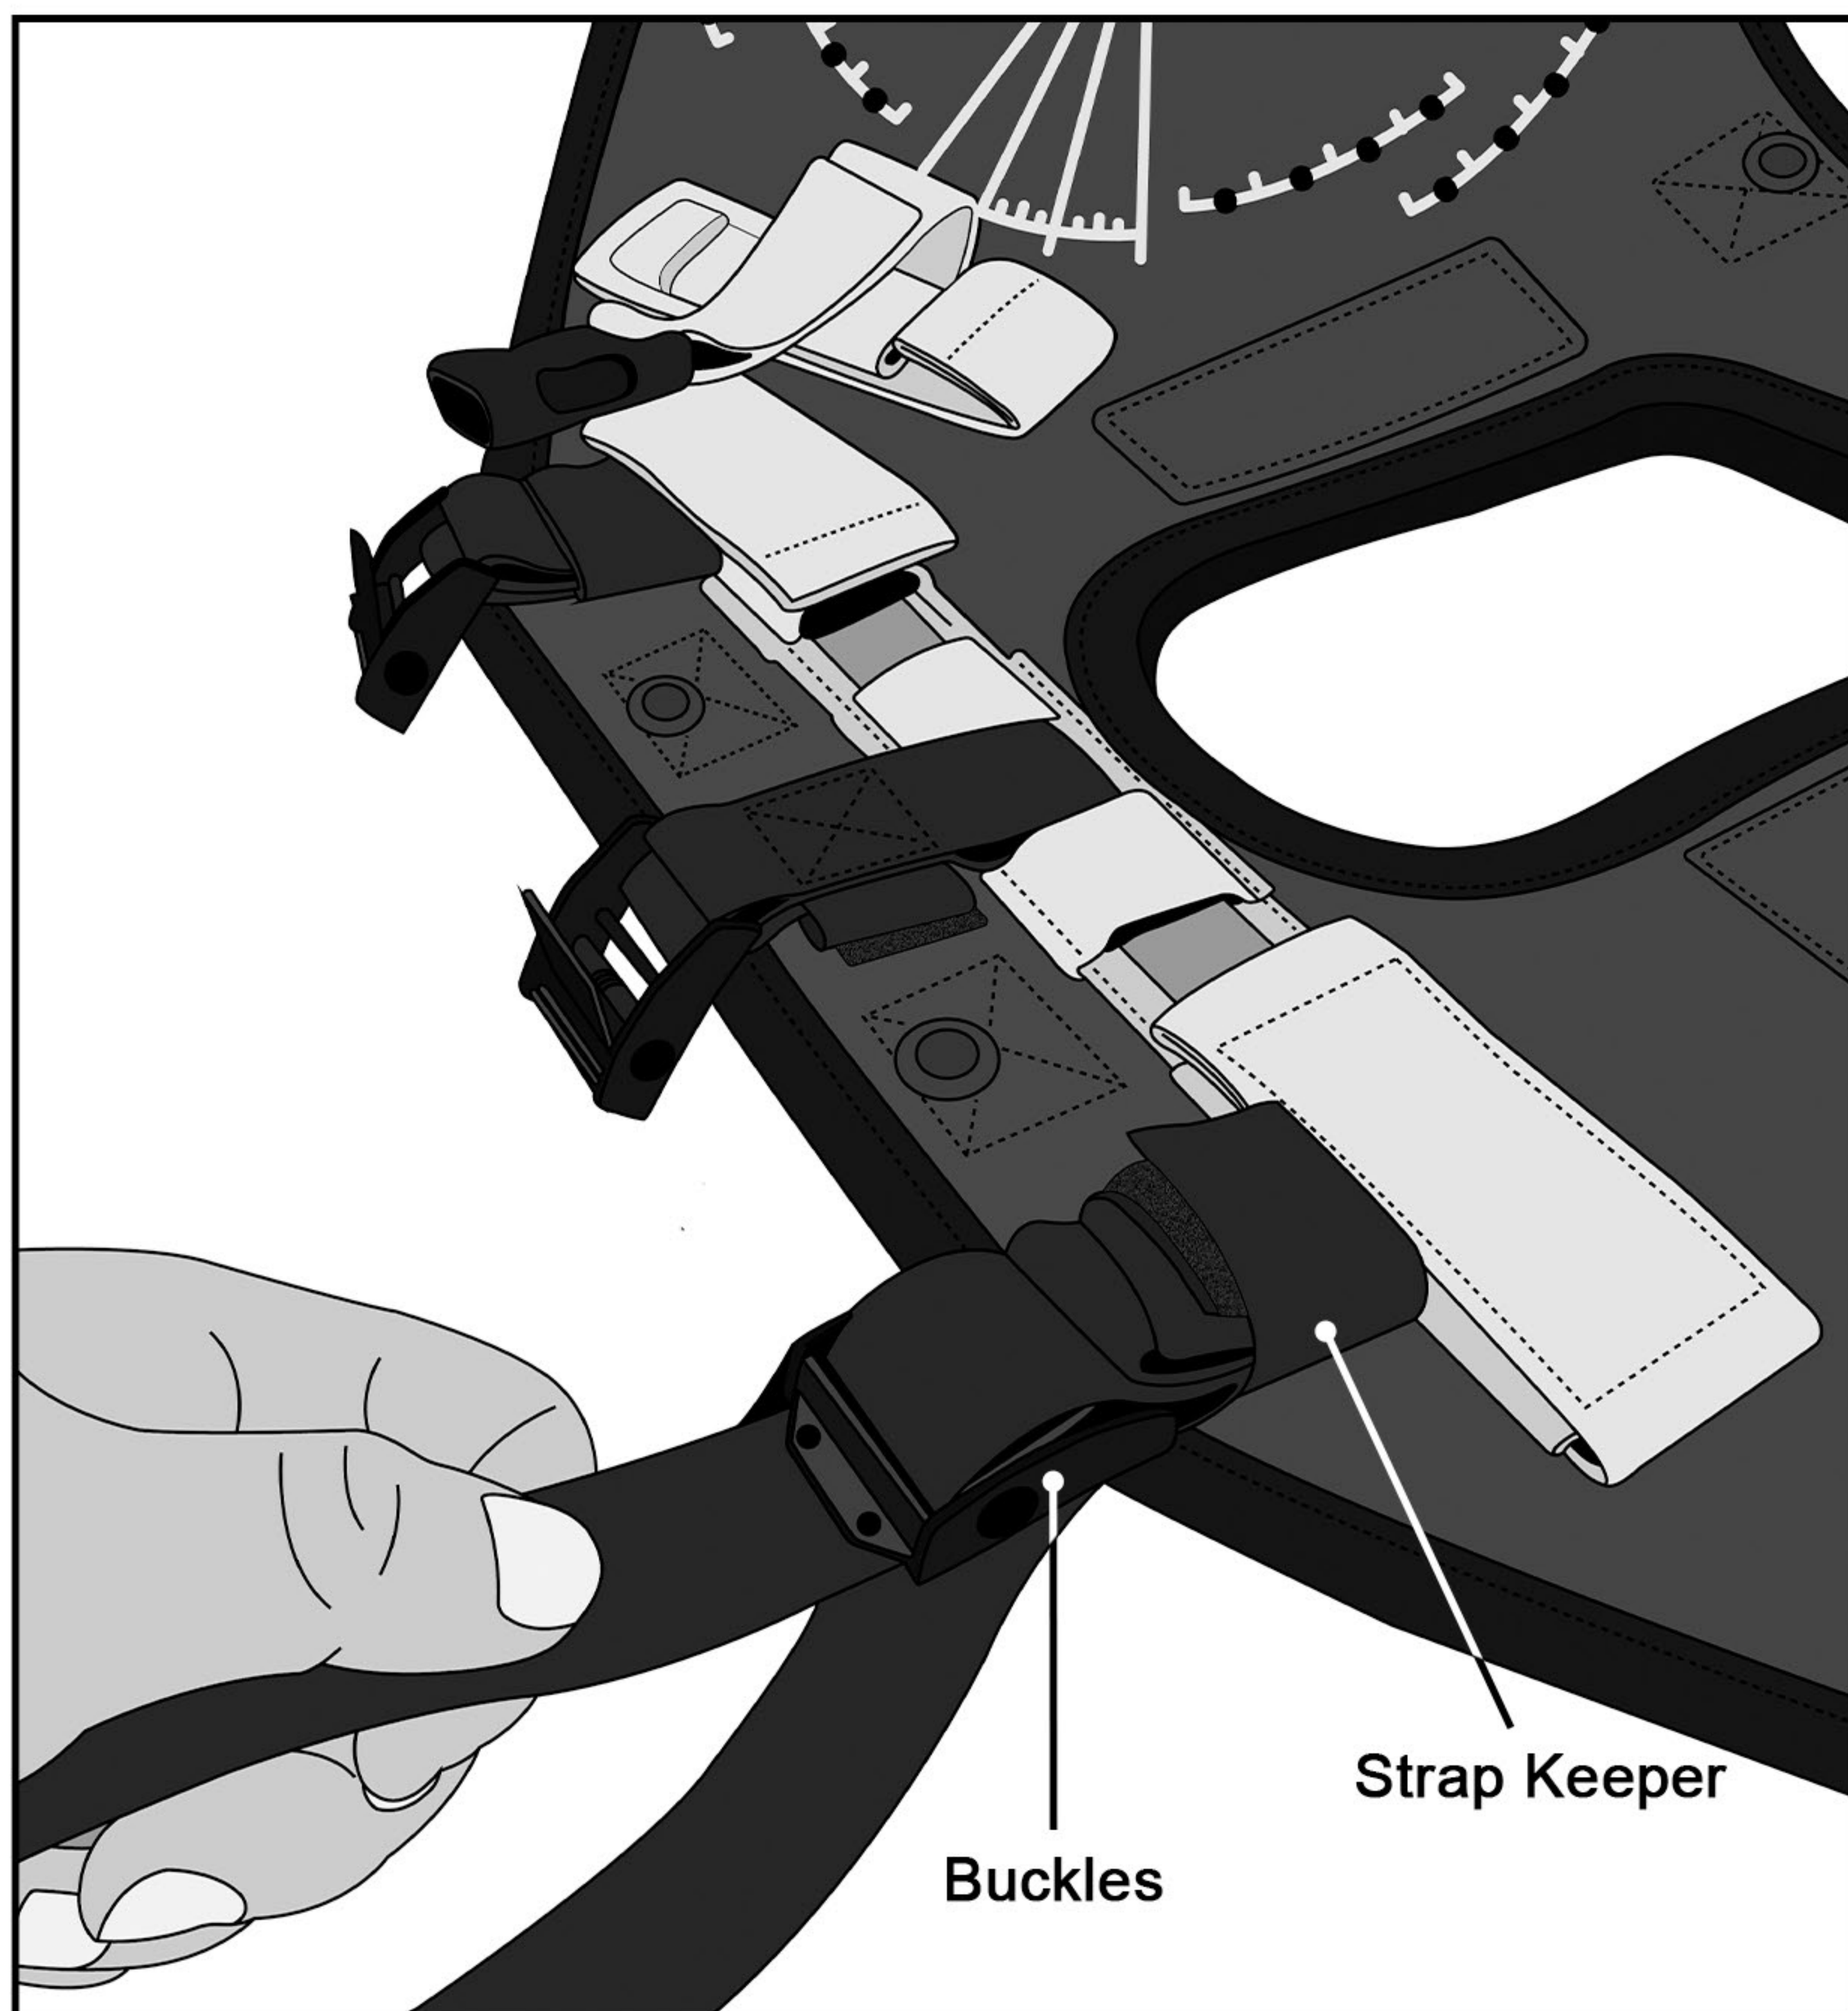

**Fig 5. Securing the harness straps**

**Step 5:**

Now wrap the leg straps through the passenger footpegs or other motorcycle frames. See Fig 6.

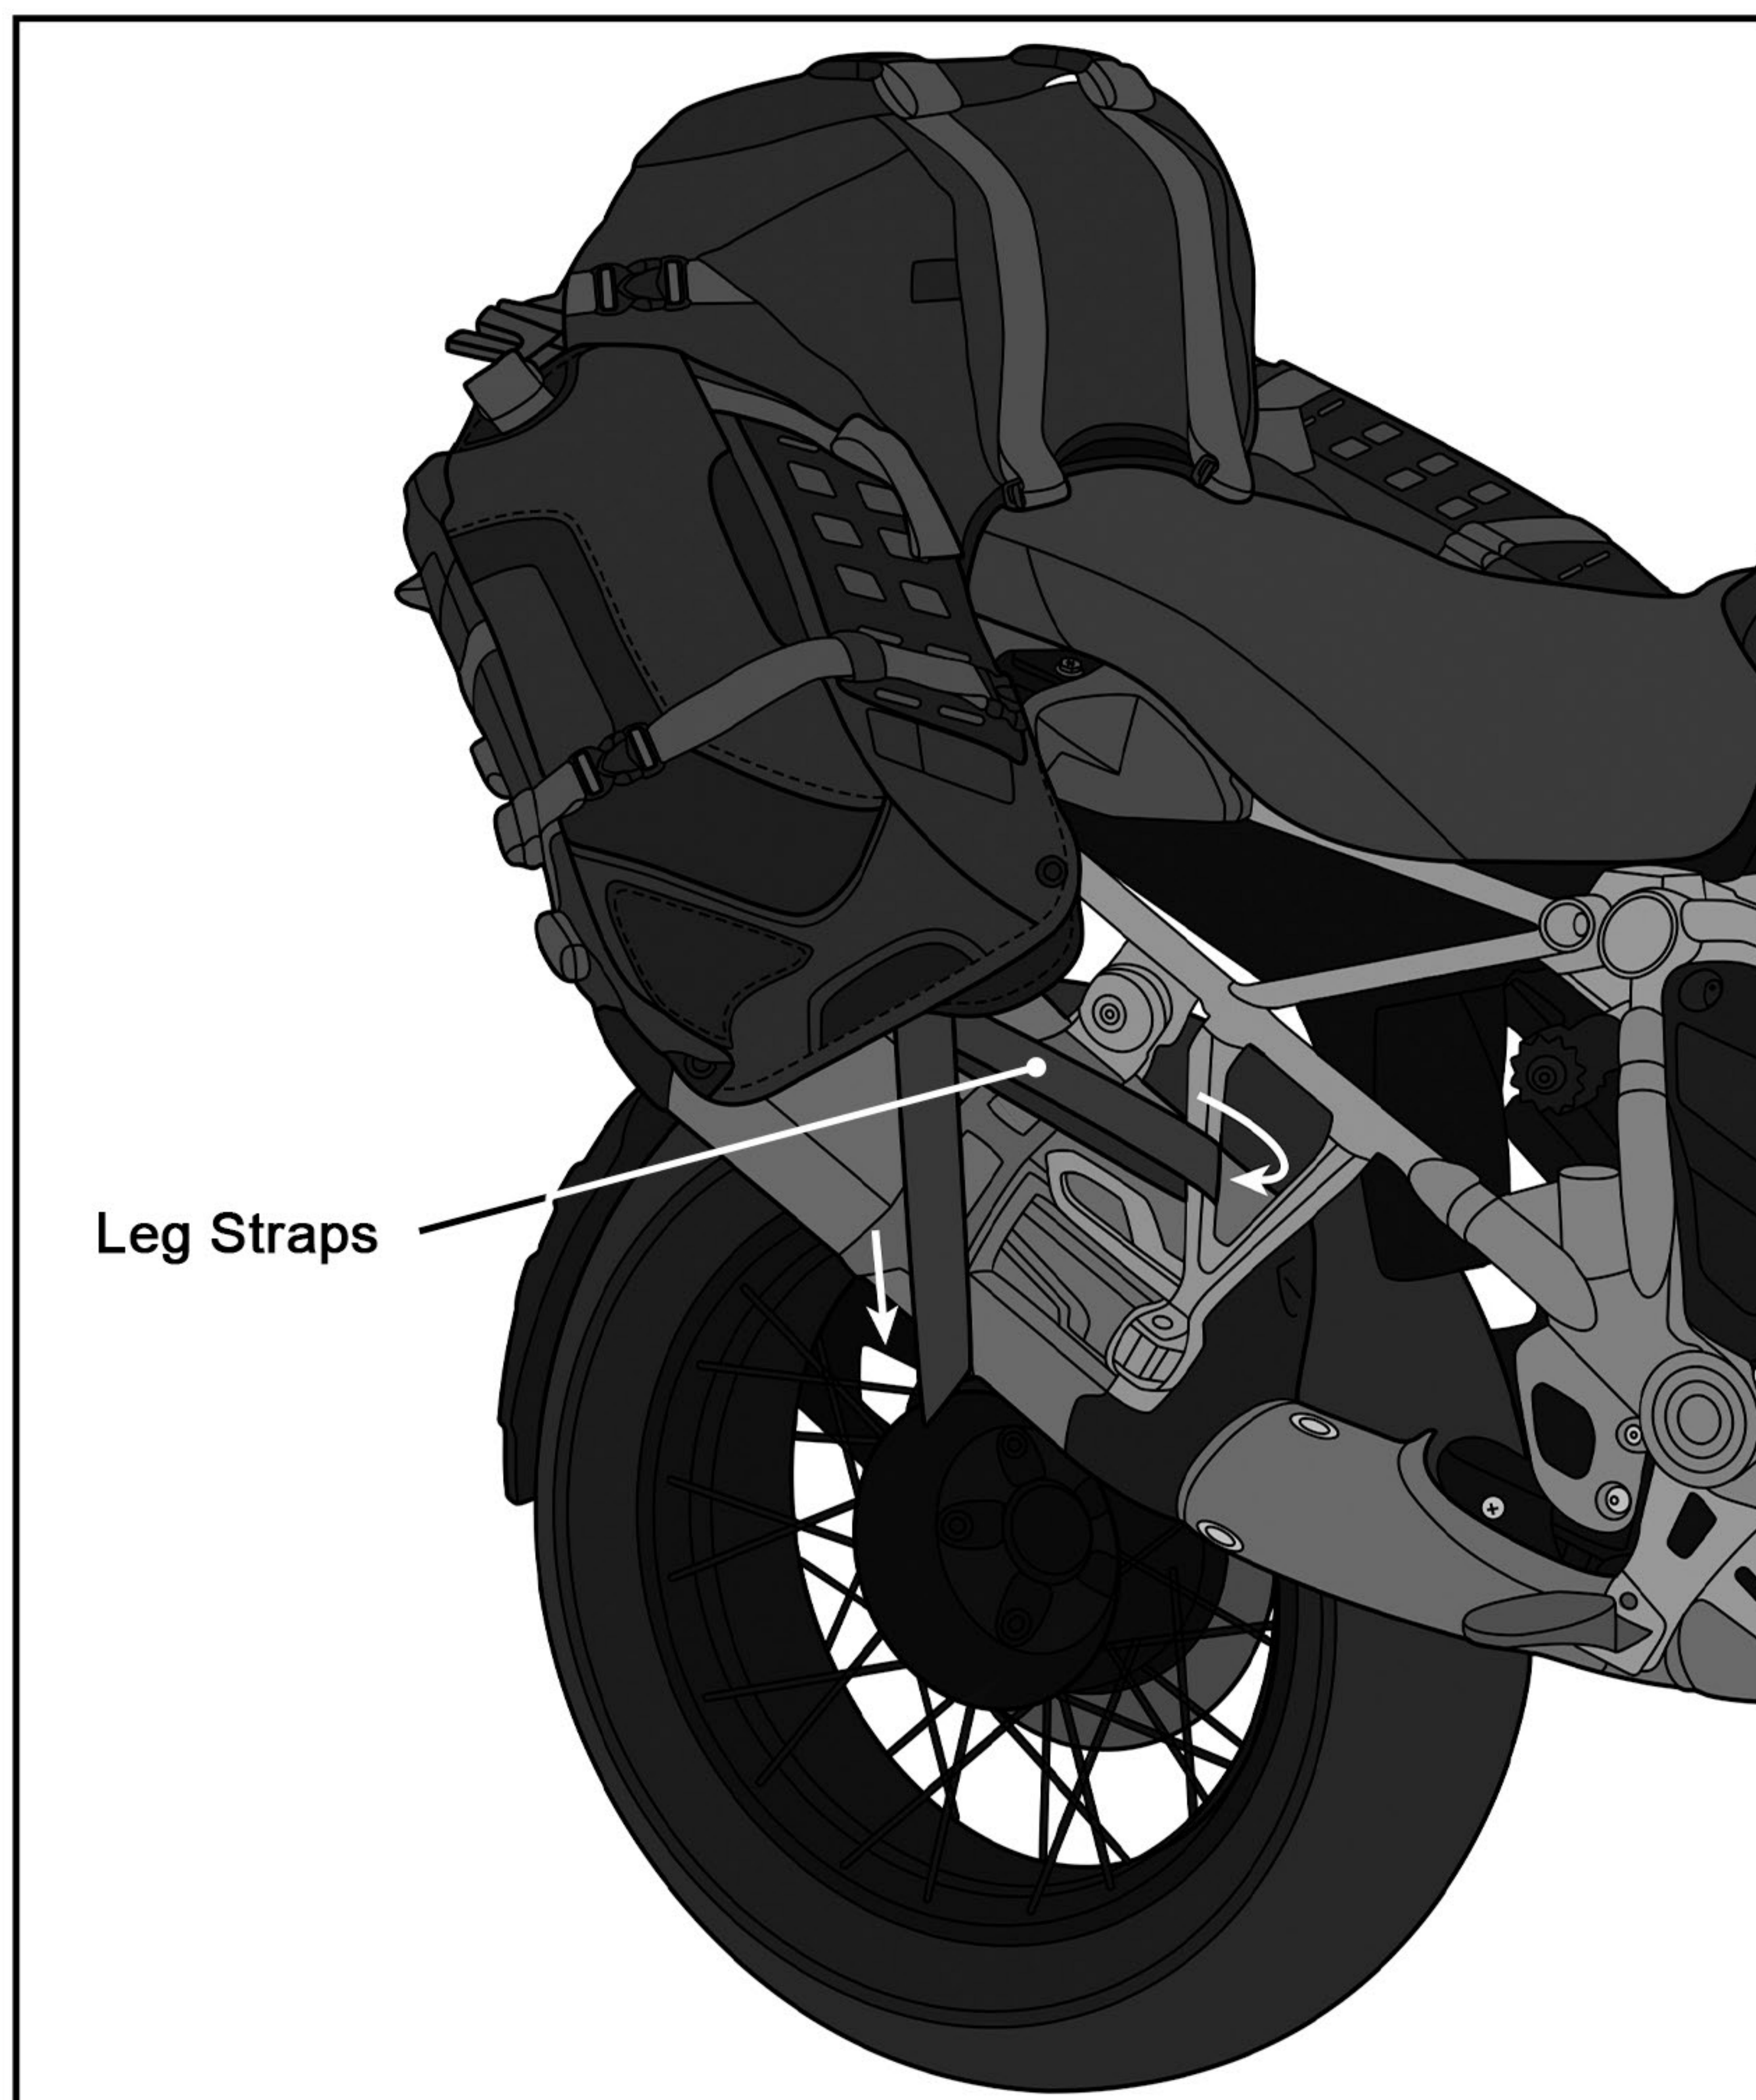

**Fig 6. Securing the leg straps**

## **Step 6:**

Install the 4L Backup Pockets to the sides of your legs using five 6mm bolts(VII), washers(VIII), and blind nuts(VI).

## **Step 7:**

The Odyssey Luggage system is not resistant to heat. Place the heat shield included in the kit on your exhaust in a location that protects the bag. Once fully tightened, cut off any excess hose sticking out.

**Congratulations! You have successfully installed the Viking Odyssey Luggage System 80L and are now ready to ride.**

### **Warnings!**

- Do not install if any of the mounting hardware is damaged or impaired.
- If you have any questions or concerns about the installation, call Viking Bags or consult your local mechanic.
- Ensure no part of the bag constructs any of the moving parts of the bike.
- Viking Bags is not liable for any damage or malfunctions caused to your motorcycle during the installation process.
- Improper loading can cause vehicle handling problems leading to death or severe injury.
- Periodically check the bolts on your bike for tightness.
- Double exhausts, additional uncovered or exceptionally hot-running exhausts, might require an additional heat shield.
- Check your heatshield placement from time to time, improper installation of the heatshield can lead to damage to your bag.