

# Installation Manual: Viking Dual-Pocket Windshield Bag:



## Parts Included:

- i Dual-Pocket Windshield Bag

## Note:

Avoid using Dual-Pocket Windshield Bag with Flamed Windshield. Graphics will be damaged.


## Tip:

During installation, push back the exposed screw threads in the horizontal windshield bracket and pry the vertical windshield support away from the horizontal frame to allow the bag bracket mounting tabs to fit between them.

## Instructions:

### Step 1

Remove the center, inner left, and inner right cap nuts from the horizontal windshield frame (see Fig1.). The two outermost cap nuts can remain in place.

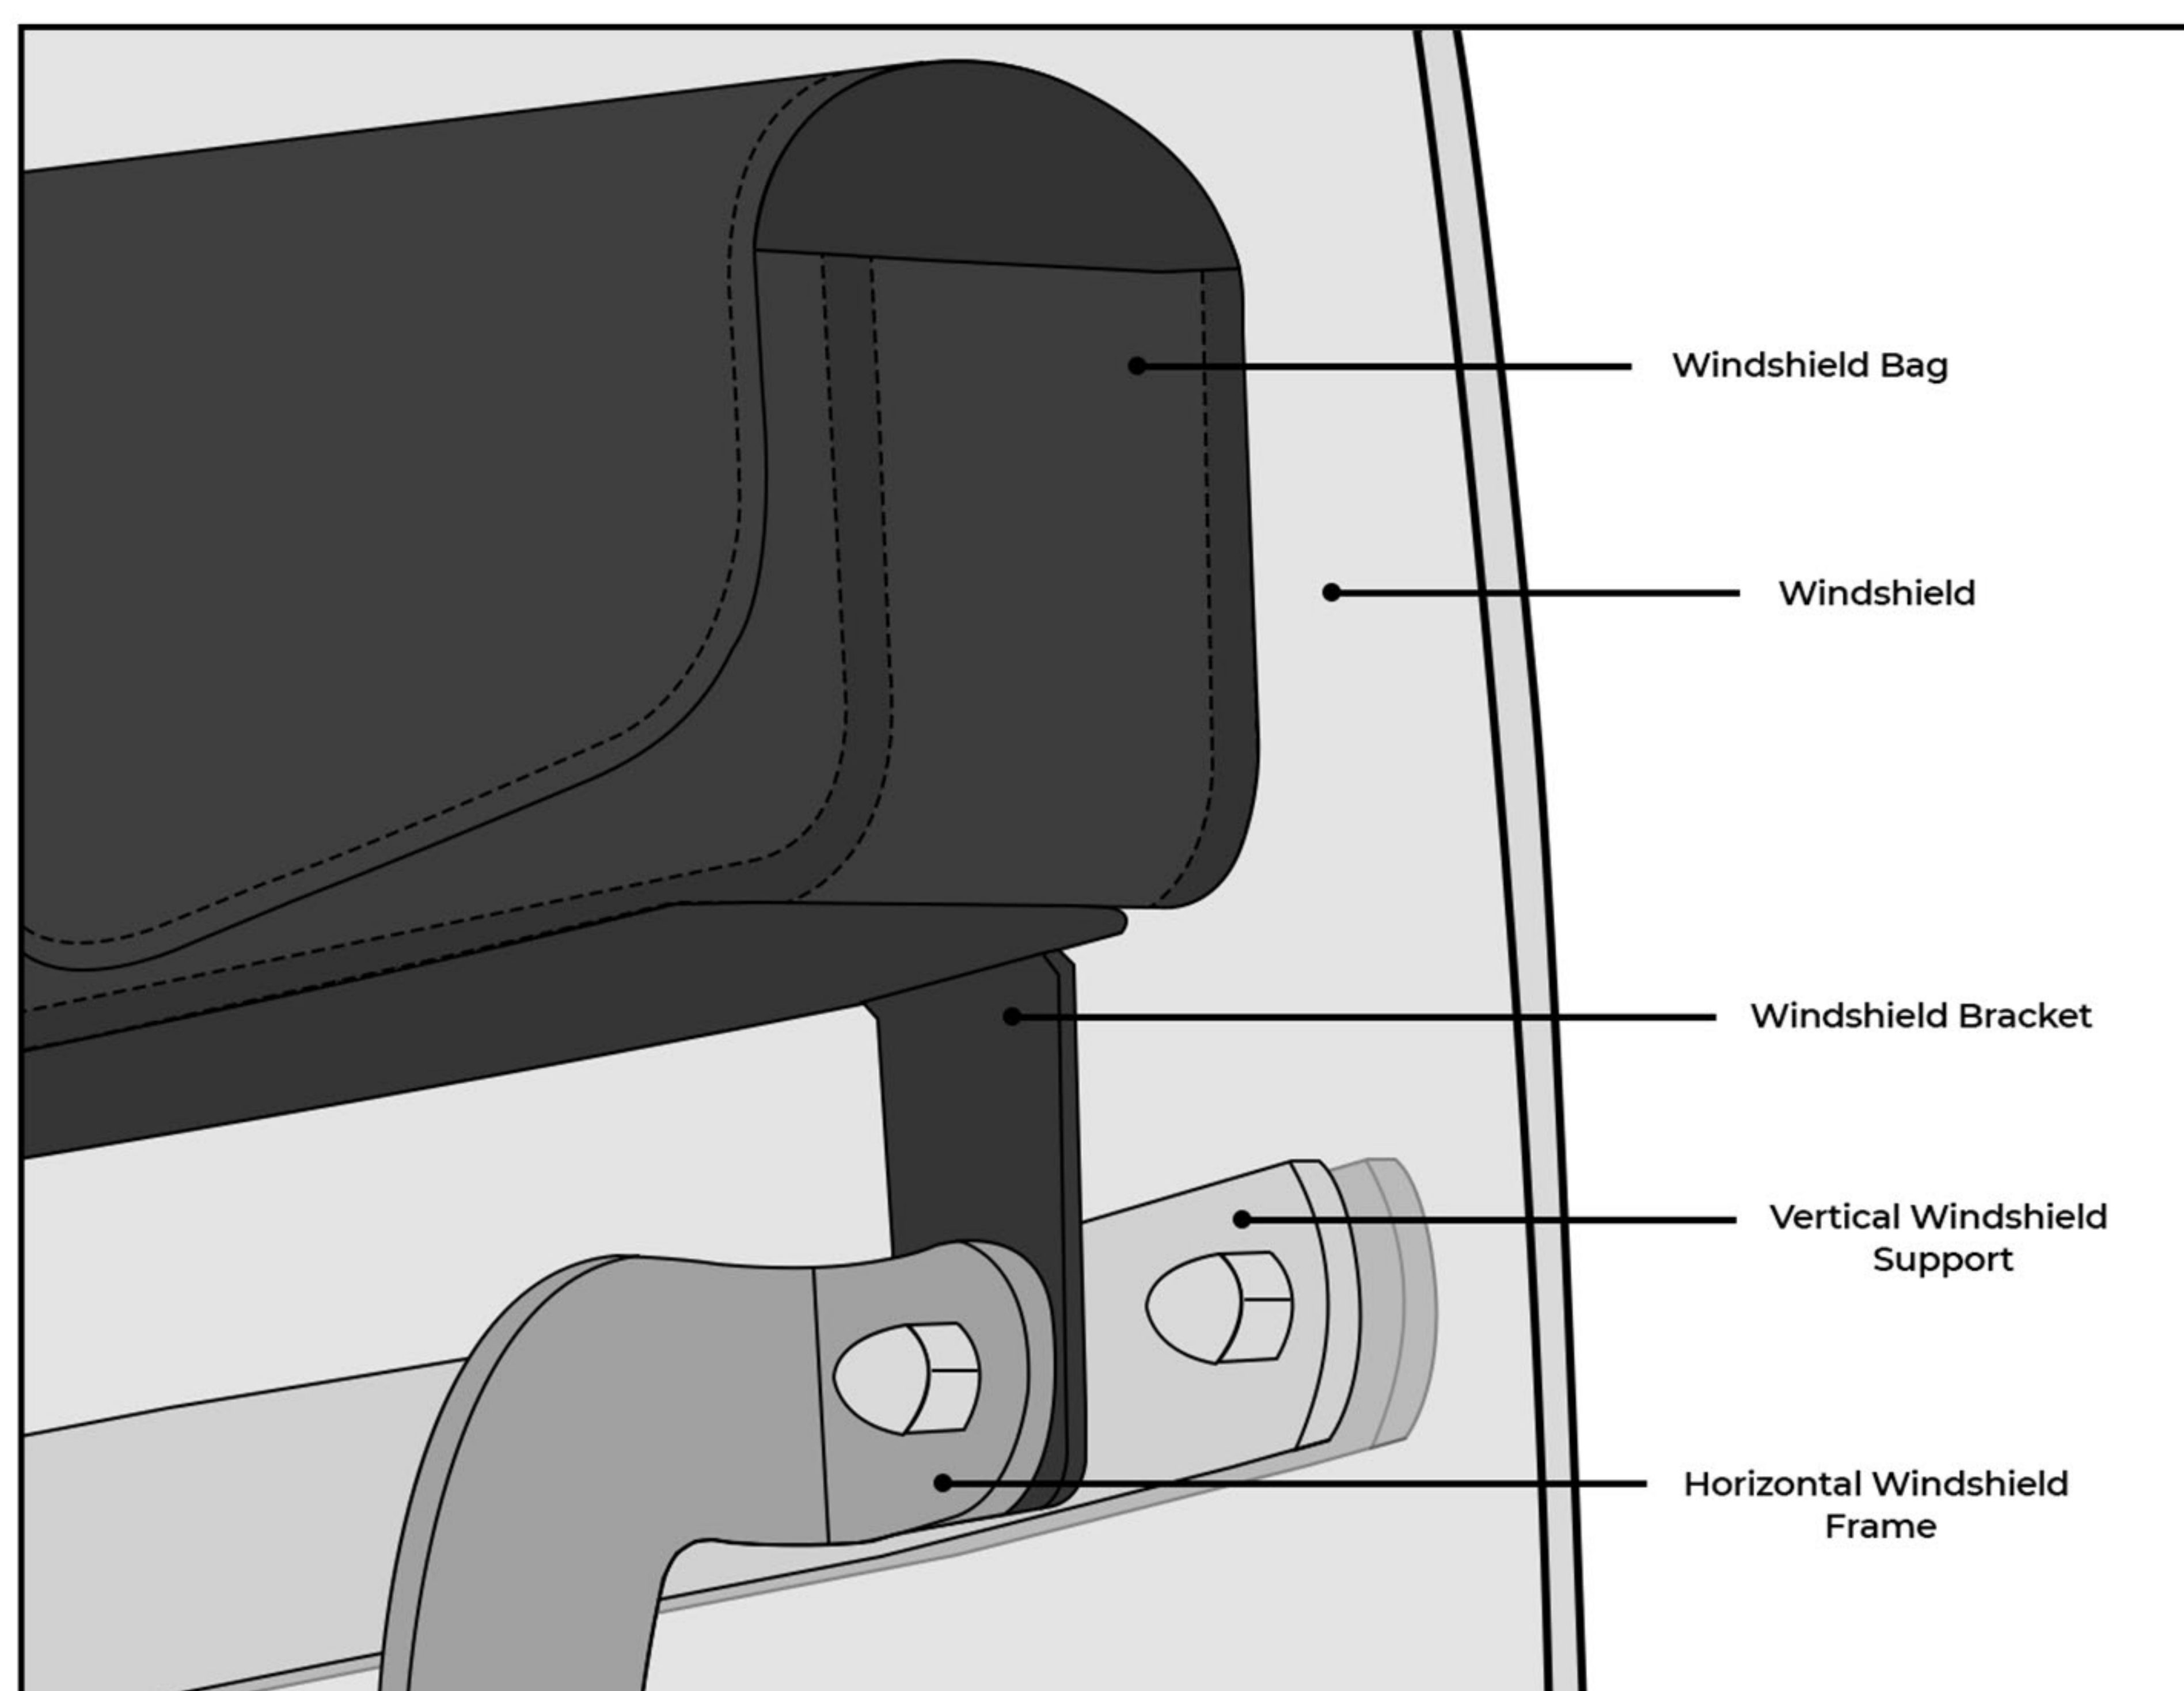

(Figure 1). Windshield Bag Mounted

### Step 2

Position the windshield bag and bracket with the mounting tabs (3) between the horizontal windshield frame and vertical windshield supports. Push the screws back through the bag bracket tabs and vertical supports.



## Step 3

Insert back the cap nuts removed in Step 1 onto the screw threads. It is recommended to tighten the nuts to 10.2 - 12.4 Nm (90 - 110 in-lbs).

**Congratulation! Your Viking Dual-Pocket Windshield Bag is installed and you are ready to ride.**

### **Warnings !**

- Avoid using any mounting part that is impaired or not working properly.
- Ensure no parts of the bag obstructs any of the moving parts of the bike.
- In case you are unsure about your ability to install the saddlebags securely, please seek assistance from a qualified mechanic.
- Viking Bags is not responsible for any damage or injury from improper use of the product.
- Improper loading can cause vehicle handling problems leading to death or serious injury.