

# Installation Manual: Viking Tri-Pocket Windshield Bag:



## Parts Included:

- i. Tri-Pocket Windshield Bag

## Note:

The brace under the bottom of the windshield bag adapts to the shape of the windshield bracket as the cap nuts are torqued.


## Tip:

- i. To keep the surface of the windshield bag in good condition, gently wipe it with a Micro Fiber cloth dampened with clear water or a mild cleanser.
- ii. During Step 2 apply protective tape strips to the horizontal windshield frame to protect the chrome finish before placing the windshield bag and bracket.

## Instructions:

### Step 1

Remove the cap nuts from the center, left, and right on the horizontal windshield frame (see Fig1.)

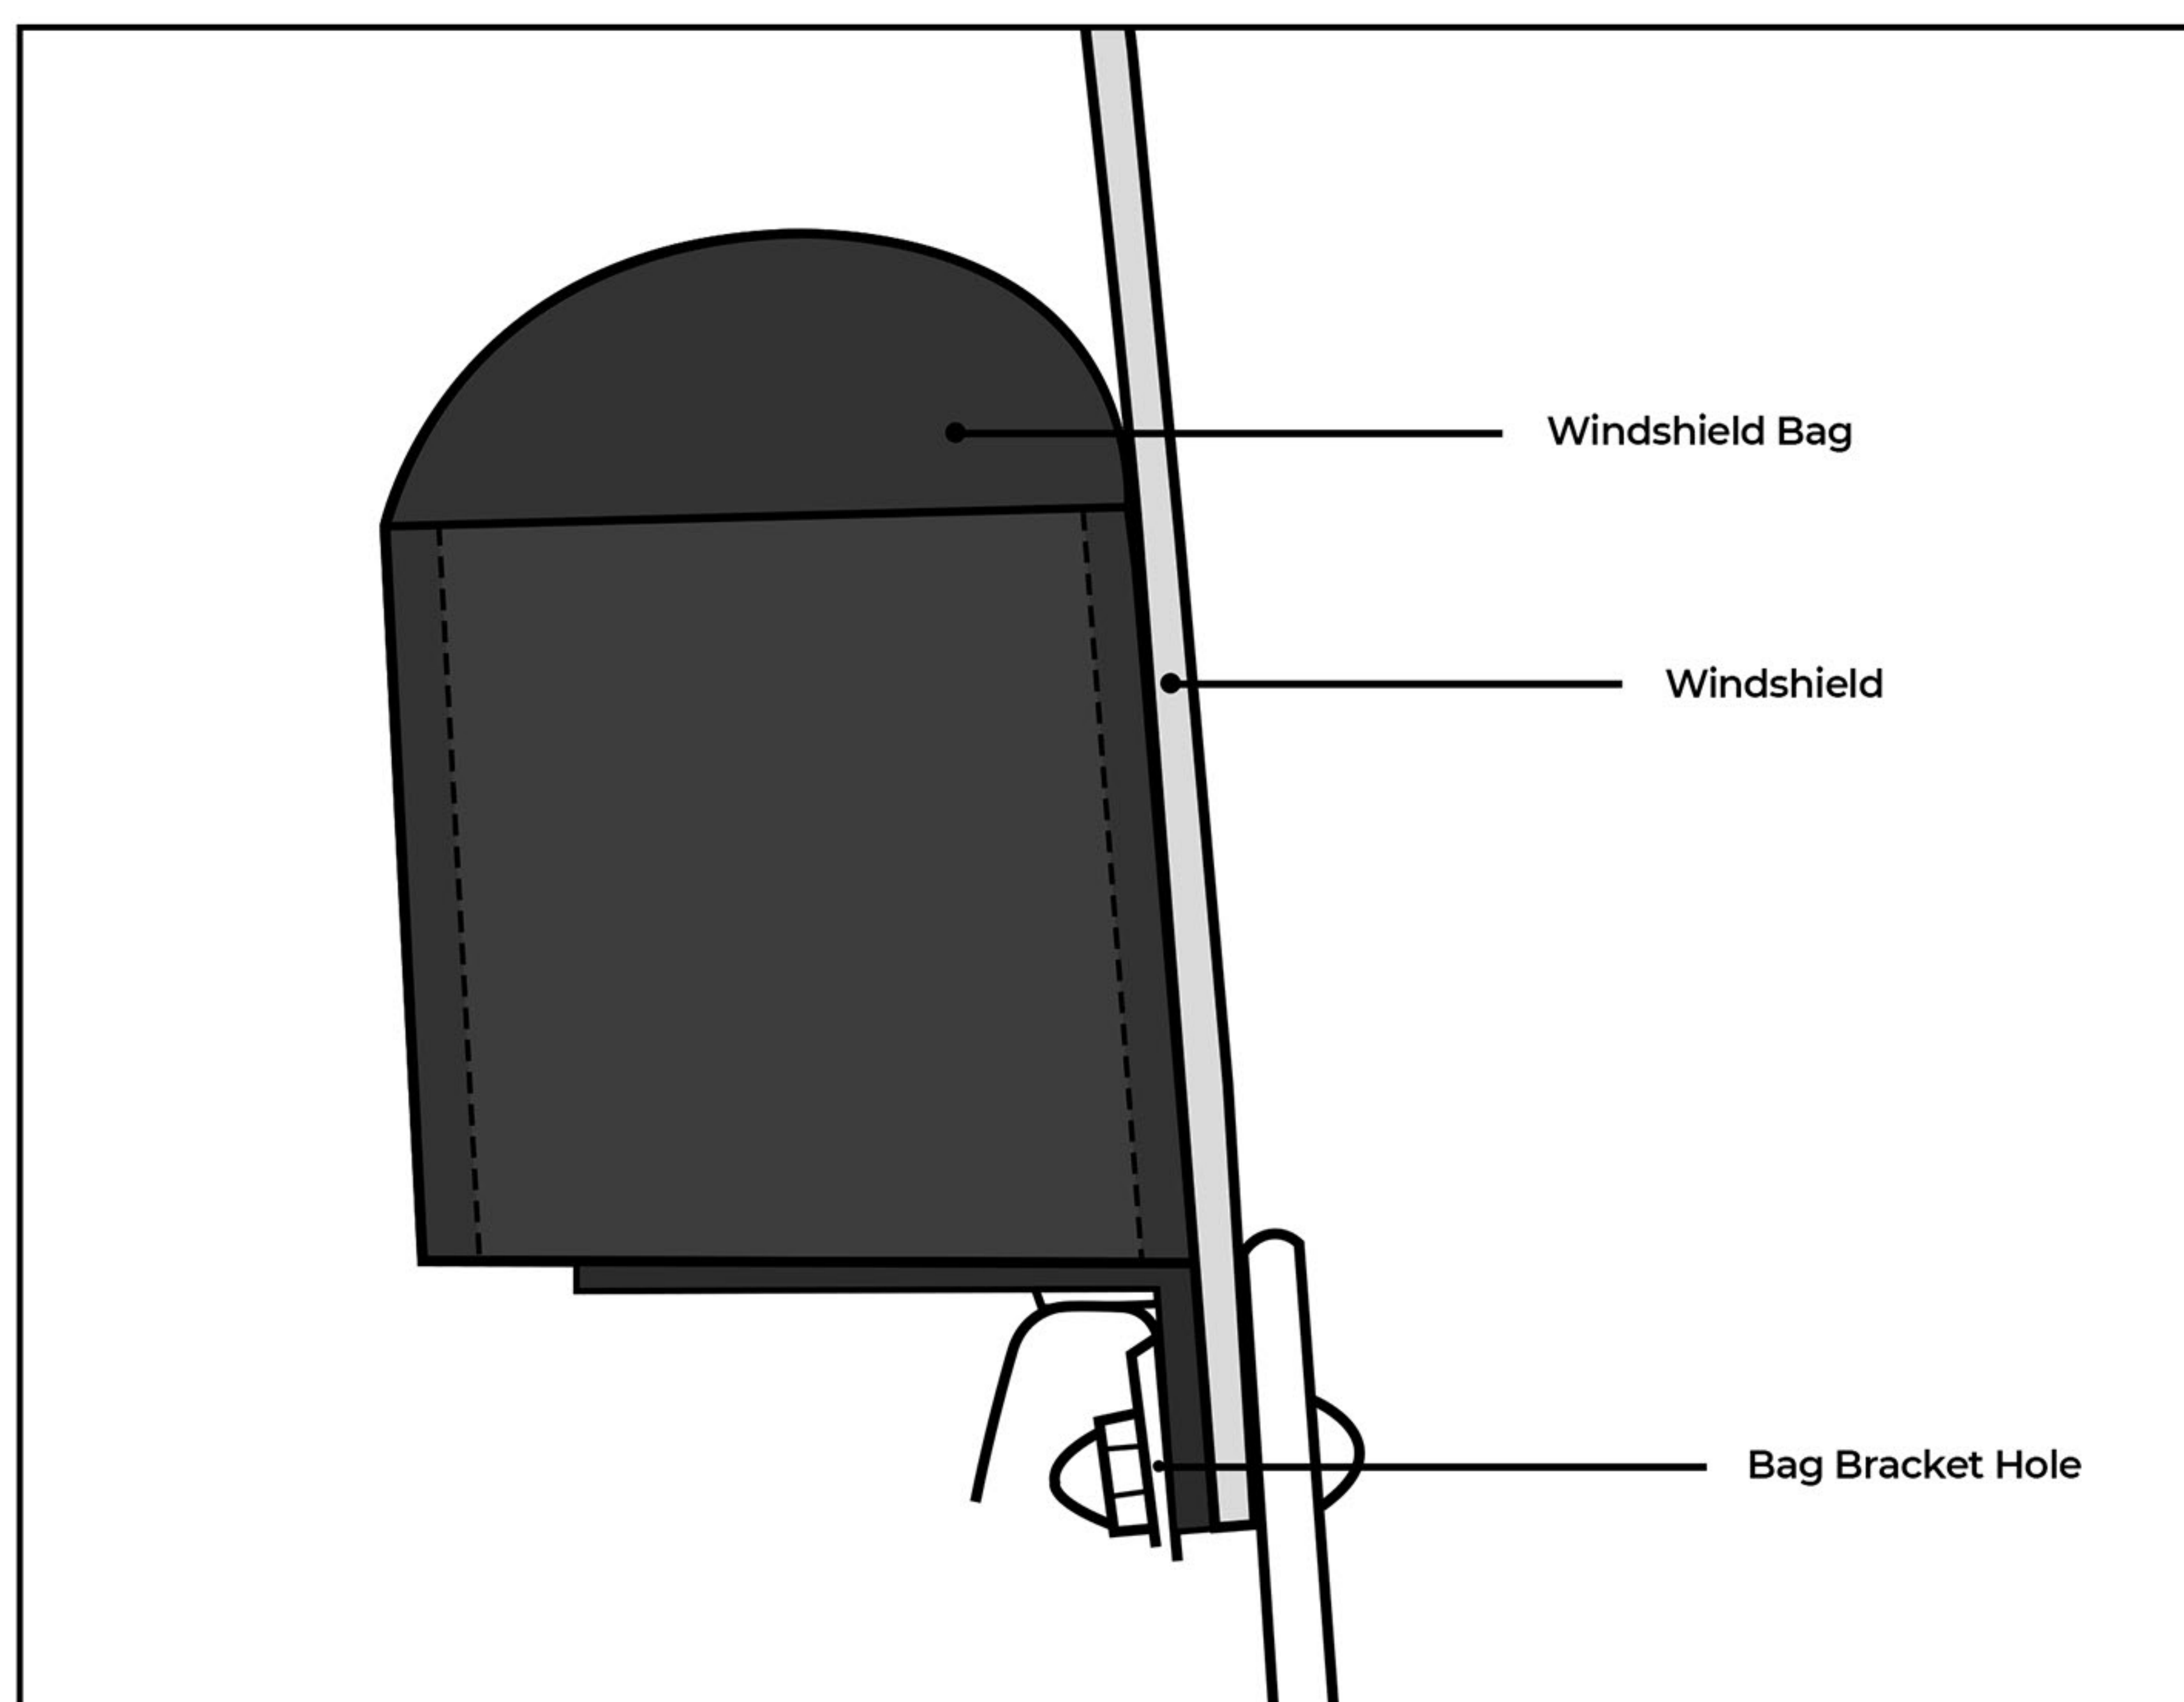

(Figure 1). Windshield Bag Mounted

### Step 2

Place the Viking Tri-Pocket Windshield Bag and brackets with the holes over the screws on the horizontal frame and align the holes of the windshield bracket, to fit snugly onto the windshield horizontal frame screw.

## Step 3

Fasten the cap nuts removed in step 1 onto the screws through the holes under the windshield bag. It is recommended to tighten the nuts to 10.2-12.4 Nm (90-110 in-lbs)

### Warnings !

- Avoid using any mounting part that is impaired or not working properly.
- Ensure no parts of the bag obstructs any of the moving parts of the bike.
- In case you are unsure about your ability to install the saddlebags securely, please seek assistance from a qualified mechanic.
- Viking Bags is not responsible for any damage or injury from improper use of the product.
- Improper loading can cause vehicle handling problems leading to death or serious injury.