Viking Vanguard Sissy Bar Bag/BackPack:

x1




Parts:

- i Sissy Bar Bag/BackPack x1
- i Cargo net x1
- iii Mounting Straps x4
- iv Waist Straps

Note:

- i. The Viking Vanguard sissy bar bag can be mounted on your luggage rack, passenger pillion, or sissy bar using different configurations with the provided mounting straps.
- ii. Ensure that all straps are fastened to prevent them from coming into contact with the rear wheel while operating the motorcycle.
- iii. If installed on a passenger pillion do not exceed the weight limit of 25 lbs for the sissy bar bag.

Parts Diagram:

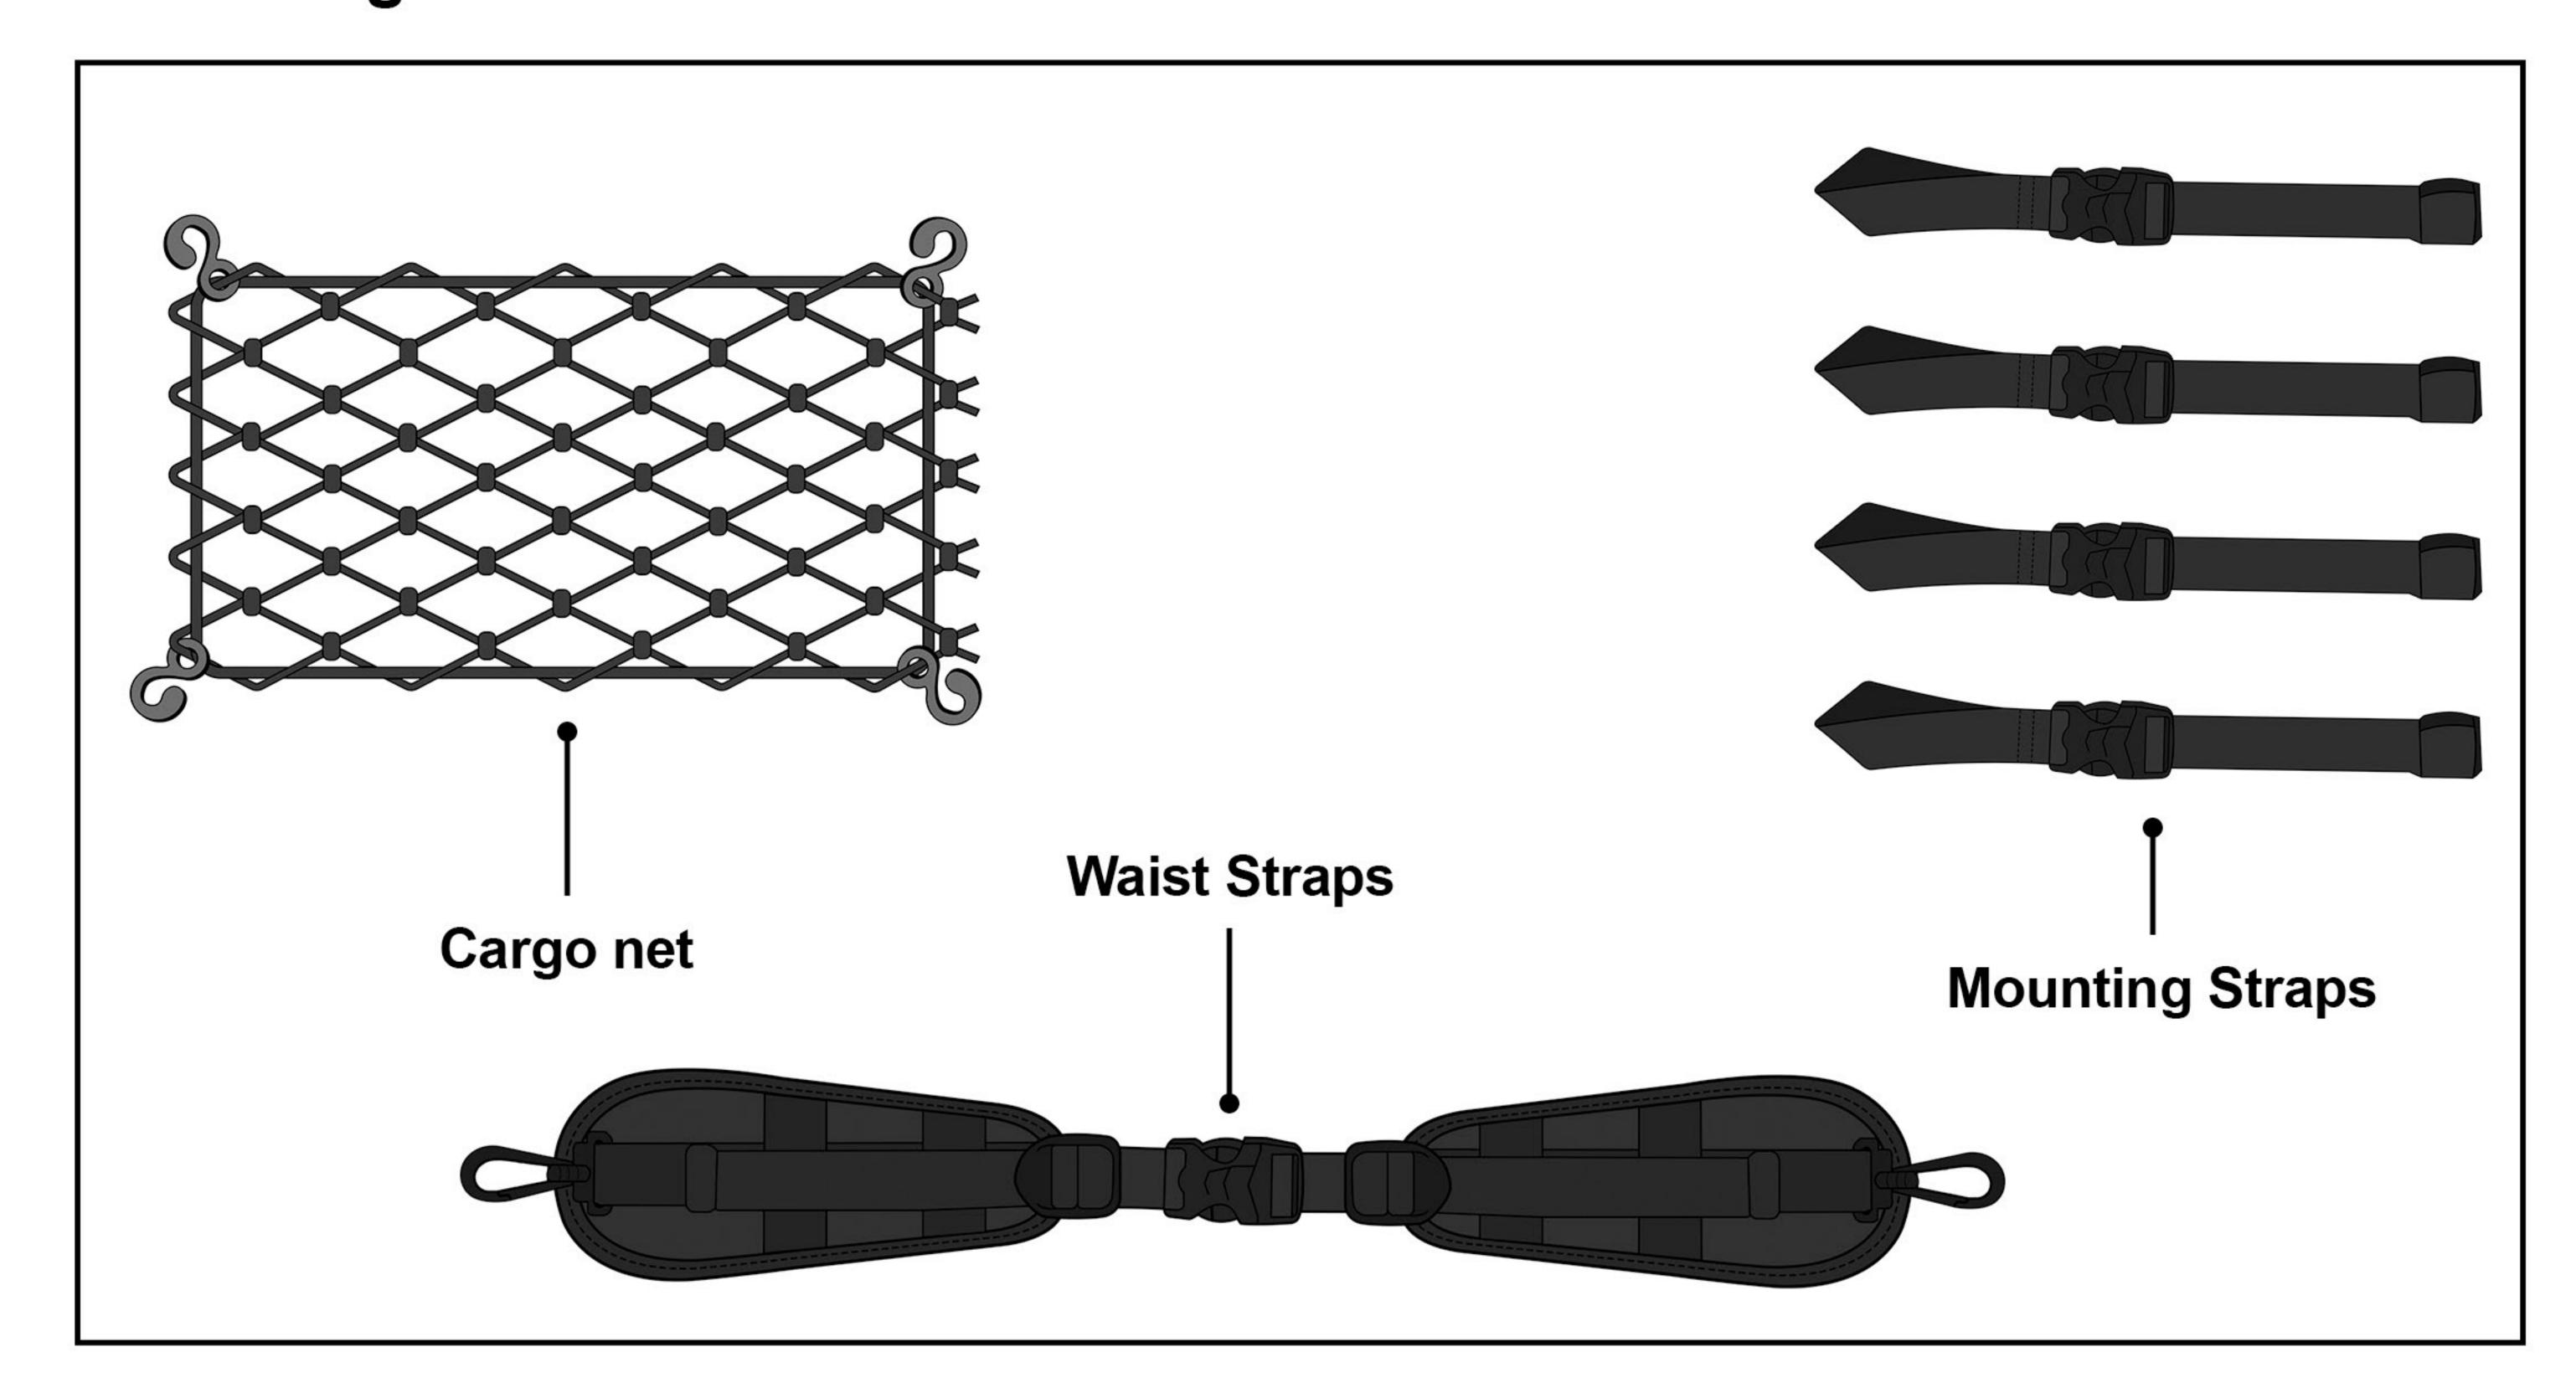

Instructions:

Step 1:

Place the sissy bar bag on the luggage rack or passenger seat if you do not have a luggage rack.

Step 2:

Attach the two middle quick-release buckle straps around the sissy bar.

Step 3:

Attach the top quick-release buckle on the roll top around the sissy bar.

(Depending on the sissy bar type, the top quick-release buckle on the roll top may not fit on the sissy bar).

Step 4:

Finally, use the provided mounting straps to loop through the D rings to secure the four straps with quick-release buckles onto your luggage rack, passenger pillion, sissy bar, or any other motorcycle part.

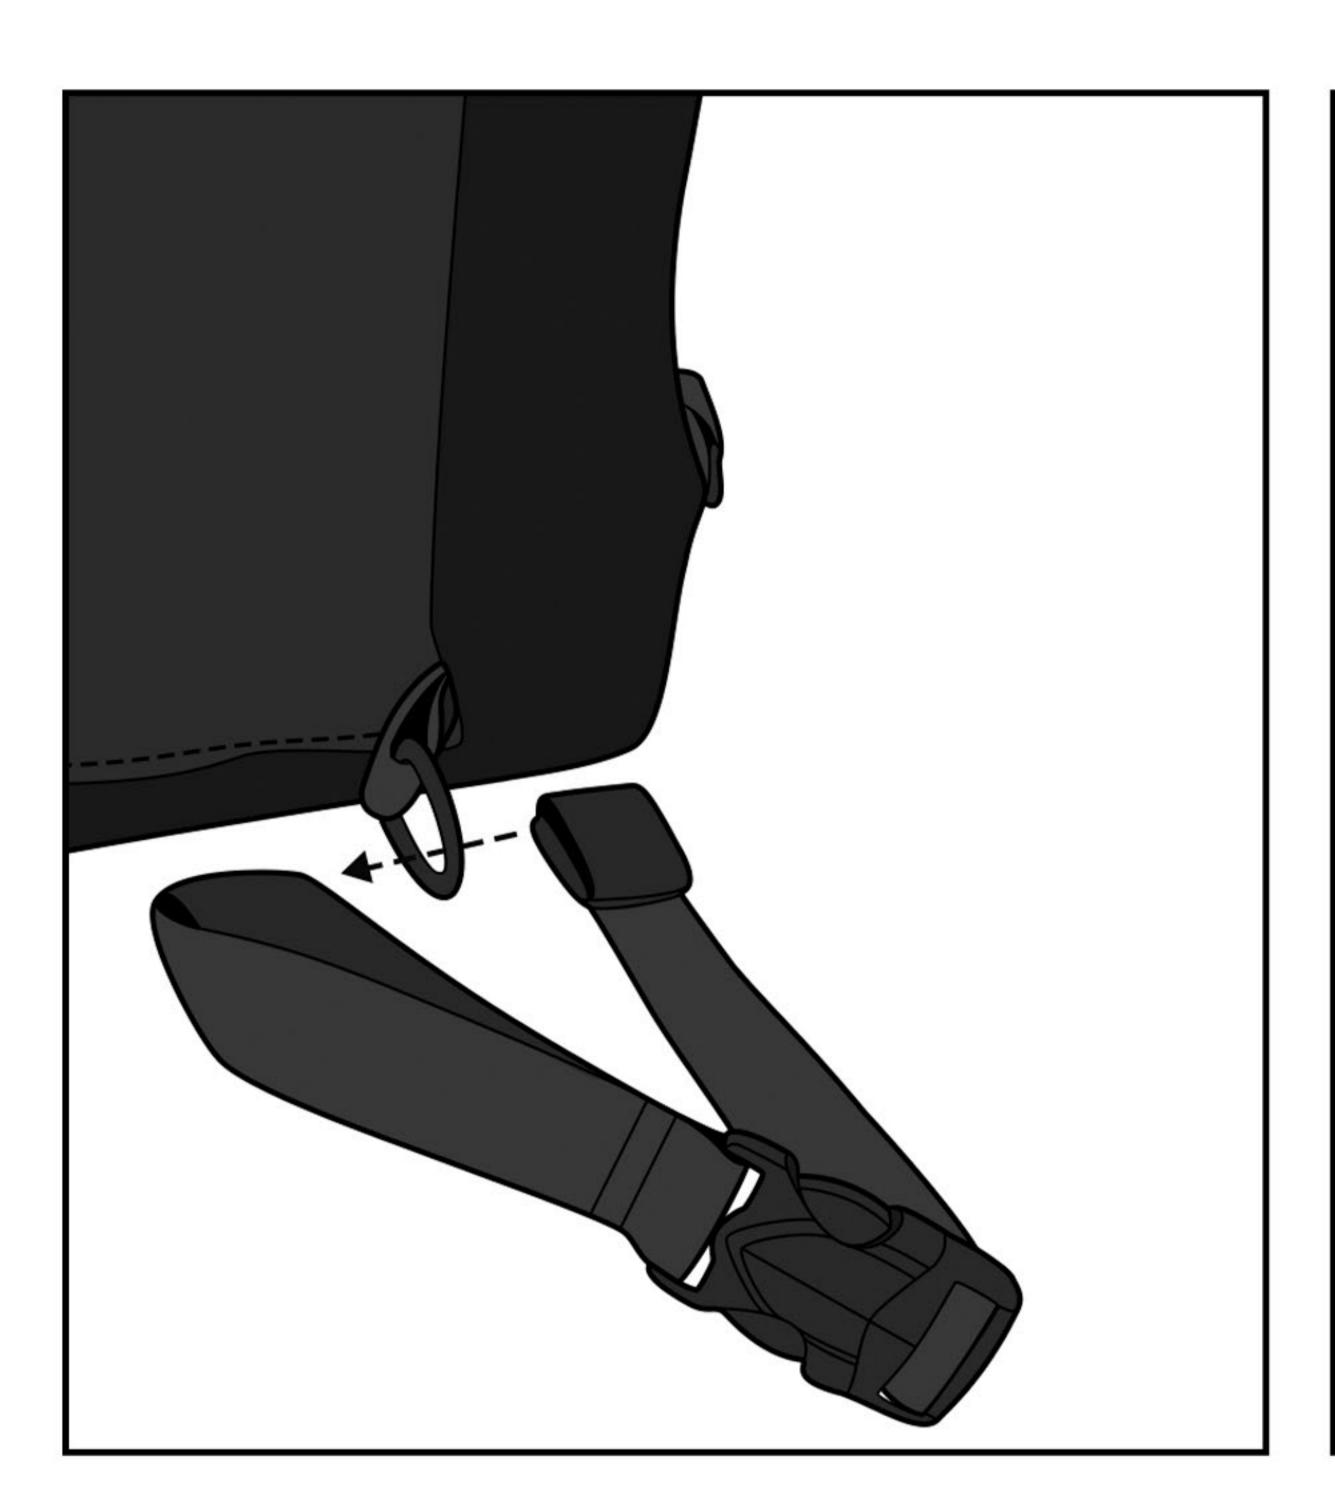




Fig 2. Loop the mounting strap to the sissy bar D-Ring

Congratulations! You have successfully installed your Viking Vanguard Sissy Bar Bag and you are ready to ride.

Warnings!

- Do not install if any of the mounting hardware is damaged or impaired.
- If you have any questions or concerns about the installation, call Viking Bags or consult your local mechanic
- Ensure no part of the bag constructs any of the moving parts of the bike
- Viking Bags is not liable for any damage or malfunctions caused to your motorcycle during the installation process
- Improper loading can cause vehicle handling problems leading to death or severe injury.
- Periodically check the bolts on your bike for tightness.