



# INSTALLATION INSTRUCTIONS

[www.vikingbags.com](http://www.vikingbags.com)



888-208-1949 |



[support@vikingbags.com](mailto:support@vikingbags.com)

## YAMAHA BOLT SADDLEBAG SUPPORTS

### Parts Included

Bag bracket	2
Rubber Grommets 12mm x 24mm, t = 10mm	8
Bush washers 9mm x 16mm, t = 1.25 mm	8
Hex Head bolt 6mm x 20mm	8
Washers 6mm	8
Allen key Head Bolt 8mm x 70mm (1.25)	4

### Note

You must relocate turn signals to the back of the bike using fender eliminator kit before proceeding with saddlebag installation.

### Instructions

#### Step 1

Remove the center 2 fender bolts from your bike and align the 2 mounting holes in the saddlebag supports to the 2 holes in the fender such that the bracket is slanting towards the rear of the bike.

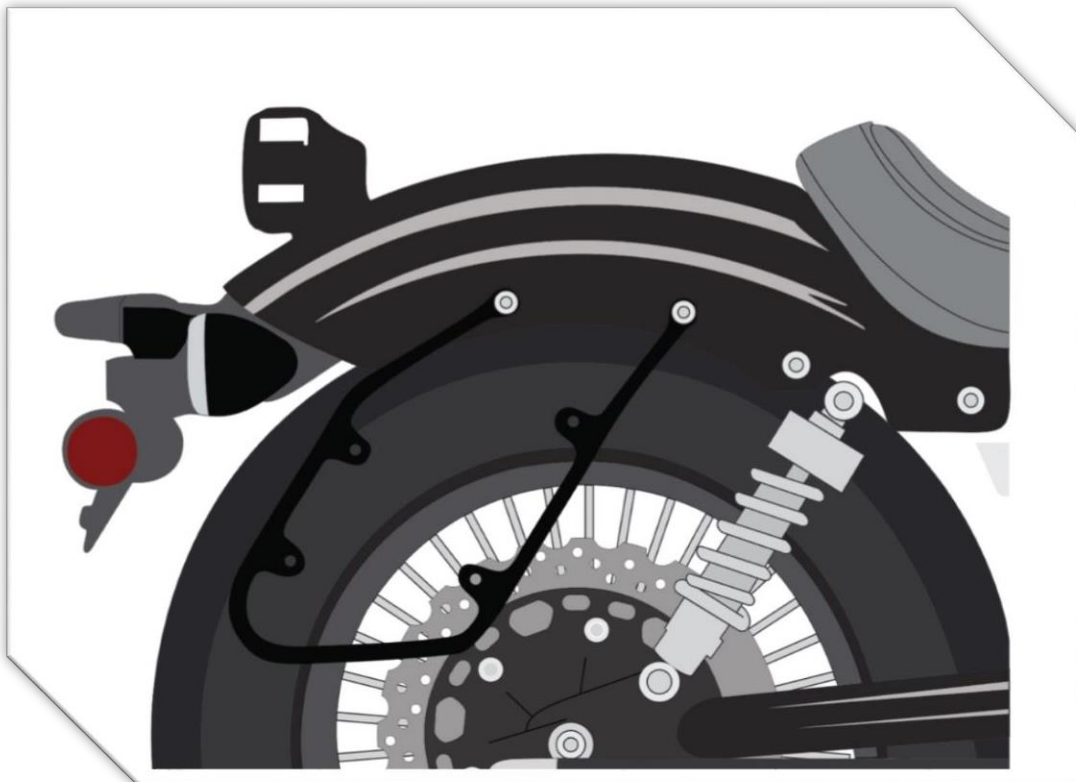


Fig A. Saddlebag Supports Installed



# INSTALLATION INSTRUCTIONS

[www.vikingbags.com](http://www.vikingbags.com)



888-208-1949 |



[support@vikingbags.com](mailto:support@vikingbags.com)

## **Step 2**

Install the saddlebag supports to the bike using 2 of the supplied bolts. Use longer set of bolts for bikes with sissy bar. Otherwise, use shorter set of bolts. We recommend that you use Loctite before installation.

## **Step 3**

The Saddlebag comes with 4 pre-drilled holes. Install rubber grommets in each of these holes. It may be helpful to use a screw driven to push in the grommets.

## **Step 4**

Align the saddlebag against the bracket so that all four holes in the saddlebag align with the corresponding four holes in the saddlebag supports.

## **Step 5**

From inside the bag, pass a mounting collar through each of the 4 grommets and then pass the HEX bolts through each of the four collars and tighten.

## **Step 6**

Repeat the process for the other side and you are ready to ride!

## **Warnings**

- ✓ Avoid usage of any mounting part that is impaired or is not working properly.
- ✓ Sporadically check for shifting of the bag and verify that no part of the mounting system is interfering with any part of the motorcycle while riding. This includes the drive train, suspension, brakes or wheels.
- ✓ The bag can be adjusted as required, where as normal brackets are fixed position
- ✓ It is important to note that if you do not mount these saddlebags properly damage may be caused to the saddlebags and/or motorcycle.
- ✓ If bags are securely installed, no part of the mounting system or bags should touch the motorcycle while in operation.
- ✓ Do not attempt to use these saddlebags if the mounting instructions are unclear. It is important that you seek professional assistance from a qualified mechanic or dealer.