

# Installation Instructions for Sportster Sissy Bars:



## Parts:

- i. Sissy Bar
- ii. Mounting Bolts × 4
- iii. Plastic washers × 4

## Tip:

- i. Install clear tape between the fender and the sissy bar to prevent scratching.
- ii. We recommend you use blue loctite to install bolts for added safety.

## Instructions:

### Step 1

Clean your fender to prevent debris from getting stuck between the fender strut and sissy bar mounts.

### Step 2


Remove all 4 fender strut bolts (2 from each side).

### Step 3

Hold the sissy bar so that the holes in sissy bar mounts align with the fender holes on your bike. Your sissy bar mounting plates have cut-outs in them to allow for turn signals. See Figure A.

### Step 4

With the holes aligned, insert the included plastic washers and mounting bolts through the sissy bar mounting holes, then through the fender holes.

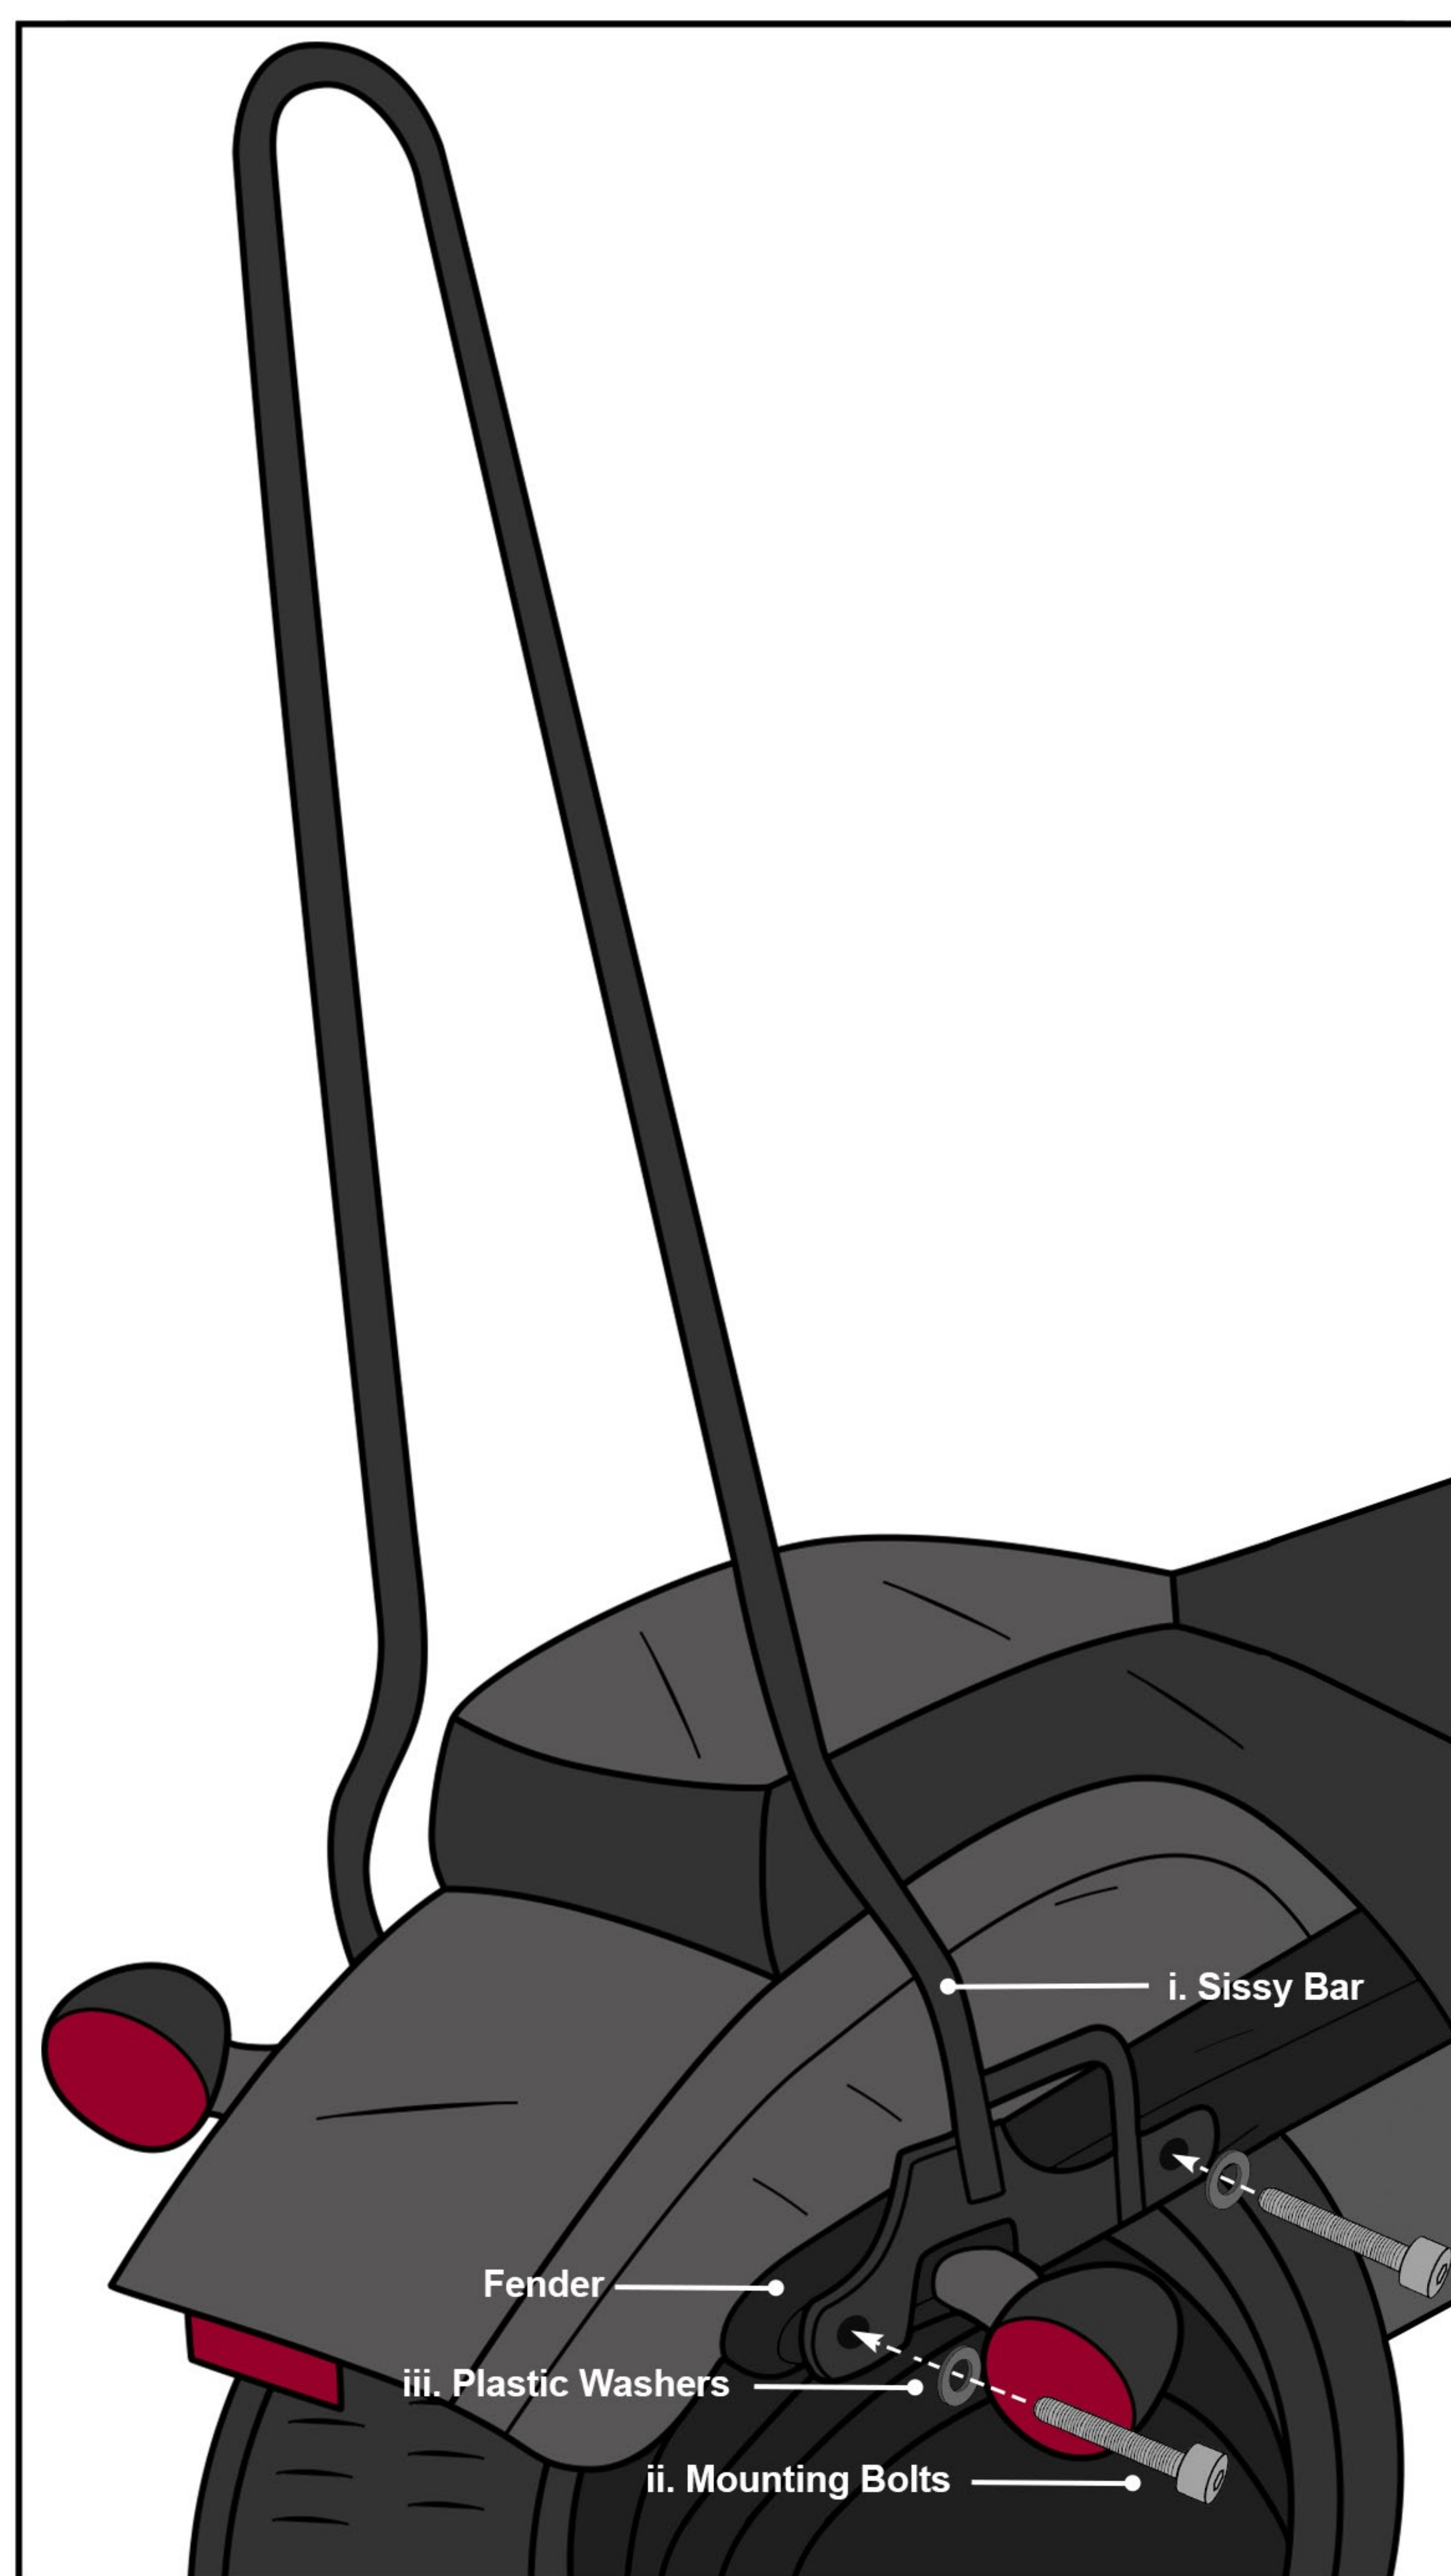

(Fig A) Sissy Bar Installed on Sportster

## Step 5

Tighten all 4 bolts.

### Warnings !

- Do not install if you are confused about any of the installation steps.
- Regularly check bolts to ensure they are firmly in place.
- Viking Bags is not responsible for any damage or injury caused by improper use of any of the products.
- We recommend you consult a certified mechanic before installation.