

Viking Odyssey 80L Luggage System Installation Guide:



Parts:

- i Odyssey Luggage System 80L Harness x1
- ii 25L Dry Bag x2
- iii Tailpack 22L x1
- iv Heatshield x1
- v Blind Nuts x20
- vi 6mm Bolts x20
- vii Washer x20
- viii Zip Ties x4
- ix Tent Pole Bag x1

Tools Needed:

- i Screw Driver

Tip:

- i Apply Loctite to ensure proper installation of bolts.
- ii Read the installation instructions carefully and make sure that all parts under the parts list are included.

Parts Diagram:

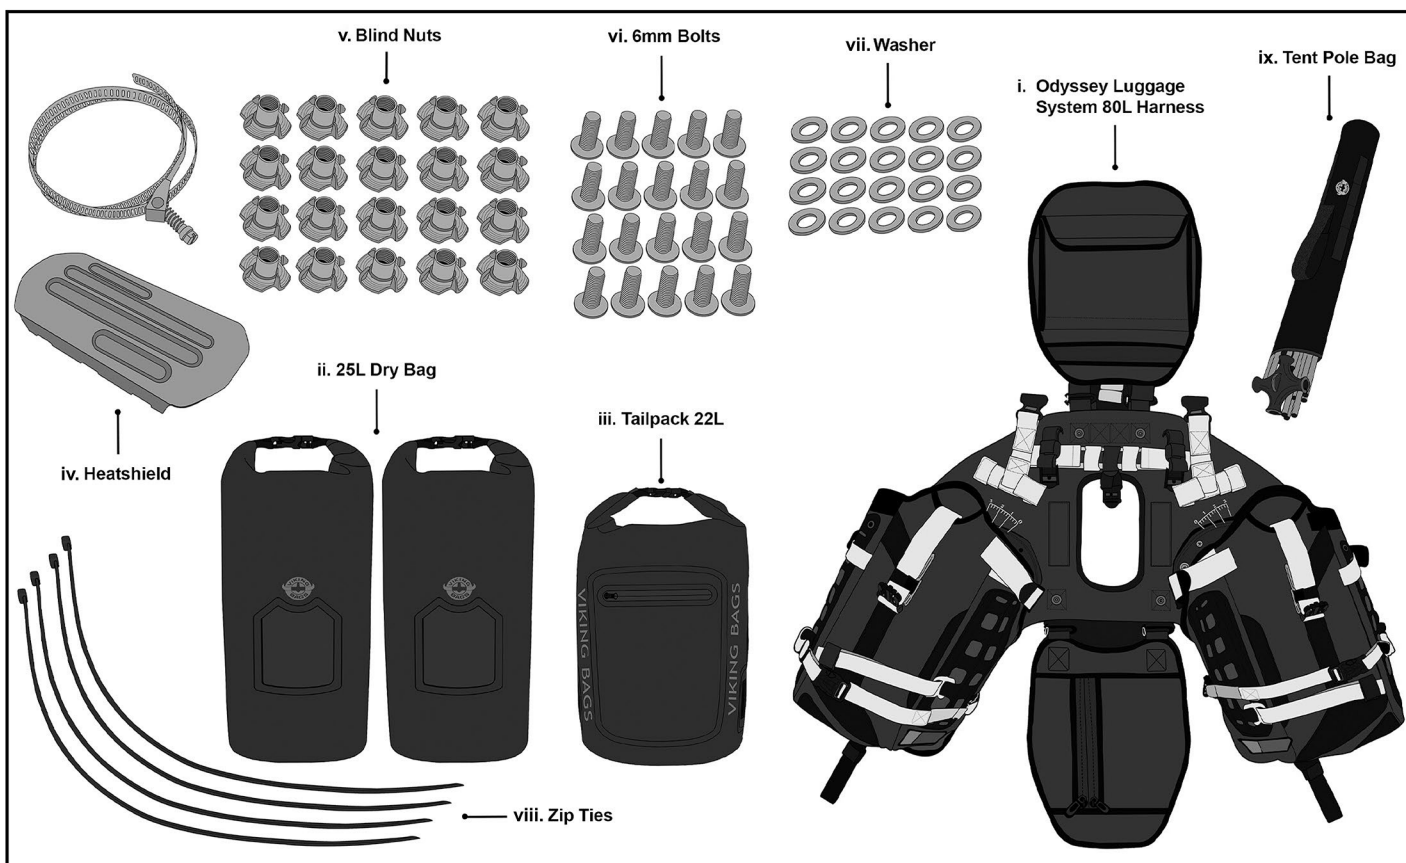


Fig 1. Parts List

Instructions:

Step 1:

Put your Odyssey 80 luggage System Harness on a flat surface. Insert two 6mm bolts(VII), blind nuts(VI), and washers(VIII) onto the center of the detachable legs. Do not fully tighten, keep the bolts loose. See Fig 1.

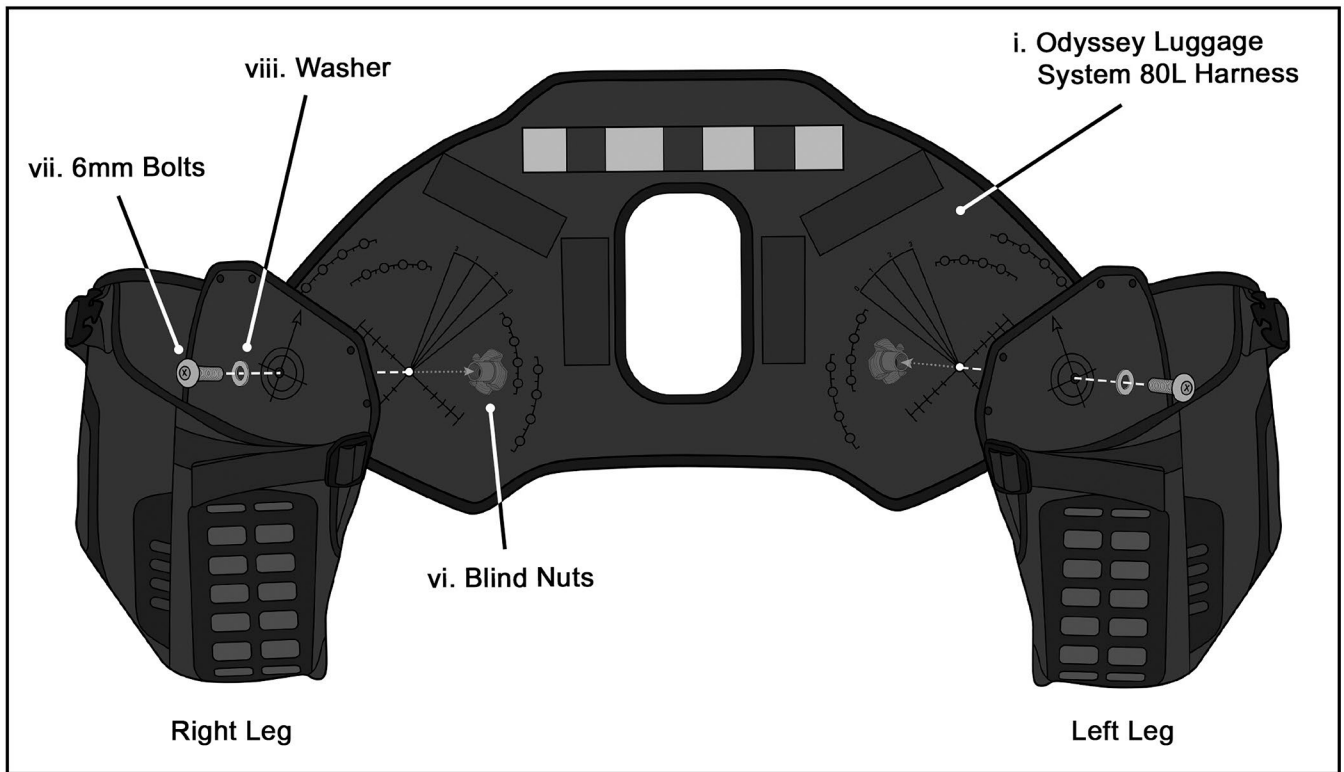


Fig 1. Attaching the legs to the harness

Step 2:

Place the luggage system on your motorcycle's rear and find a suitable position. Then rotate the legs to your desired angle. See Fig 2.

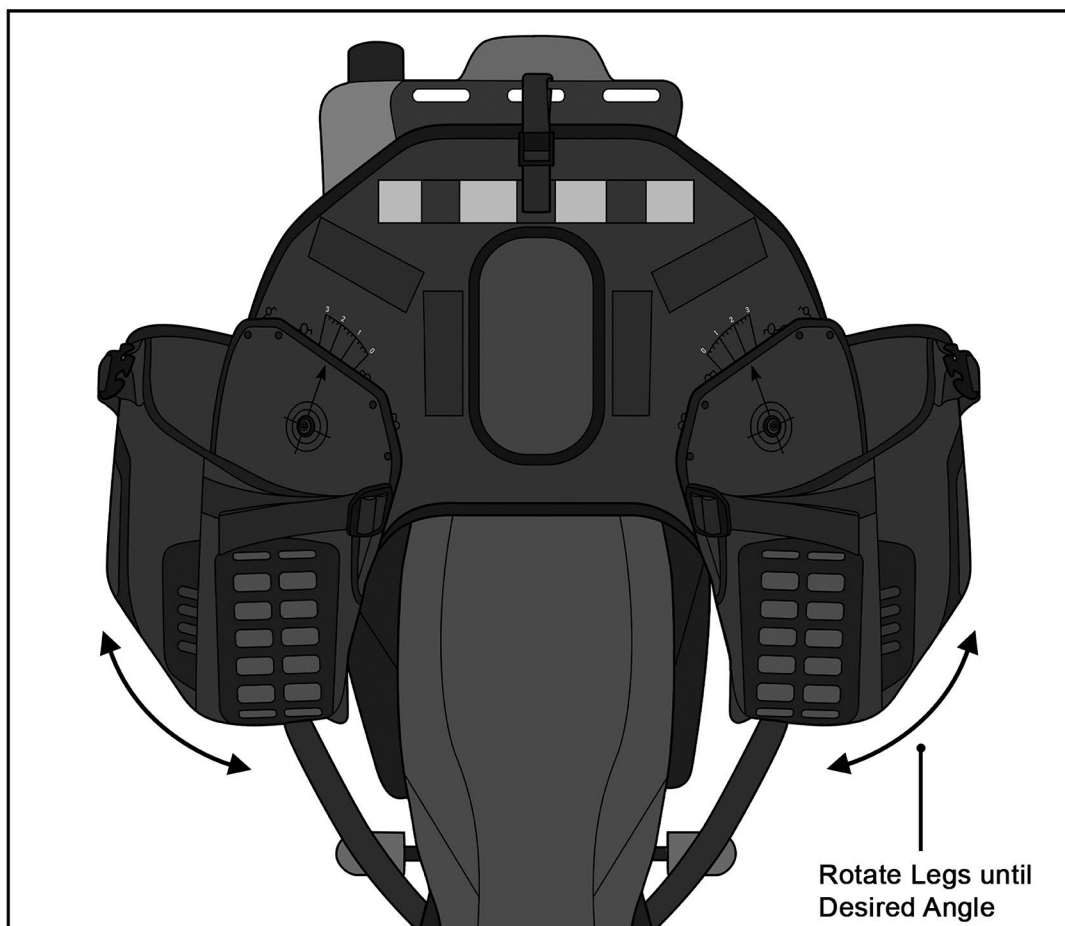


Fig 2. Adjusting the legs to your specific bike

Step 3:

Once you know your desired angle. Take the luggage system on a flat surface and add the rest of the blind nuts(VI), washers(VIII), and 6mm bolts(VII). See Fig 3.

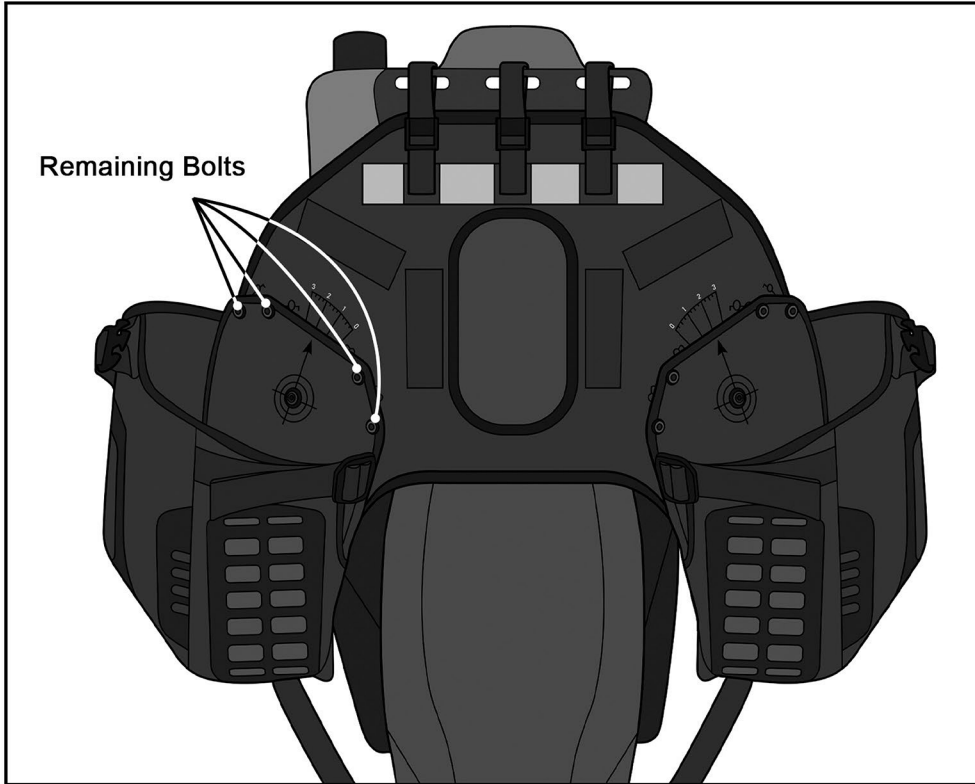


Fig 3. Installing the remaining bolts

Step 4:

Complete the installation of the Odyssey Luggage System 80L to your bike by passing the three rear straps through your luggage rack slots or other rear tubing of the motorcycle. Once wrapped, buckle the straps and roll the extra length of the straps using the strap keeper. See Fig 4. and Fig 5.

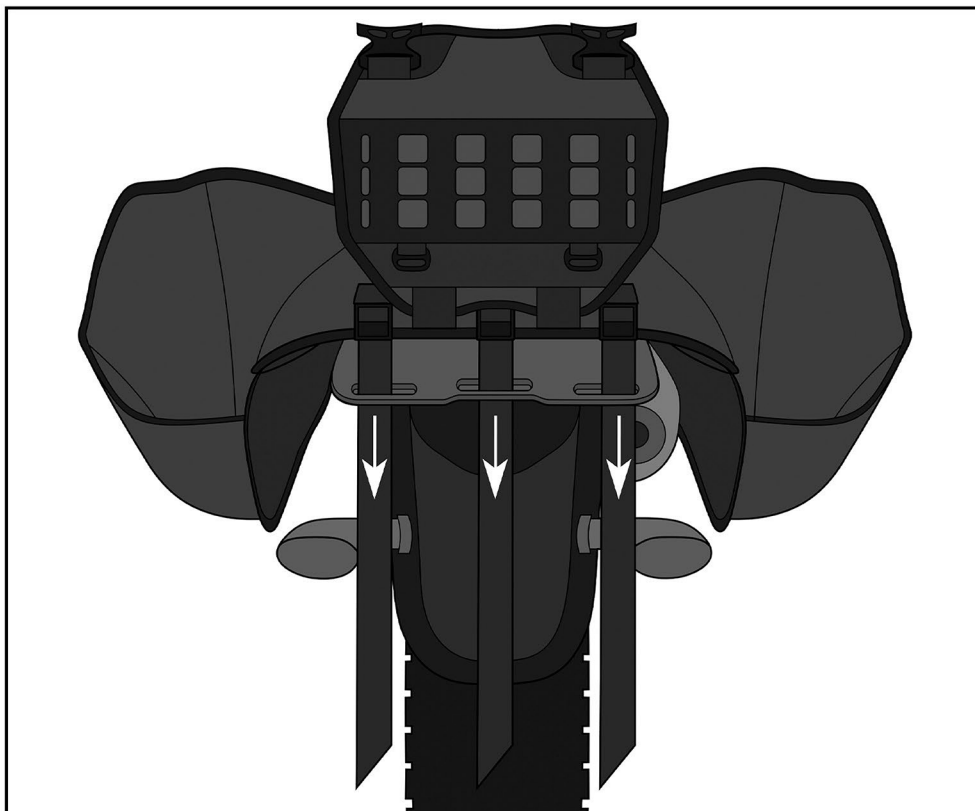


Fig 4. Securing the rear straps

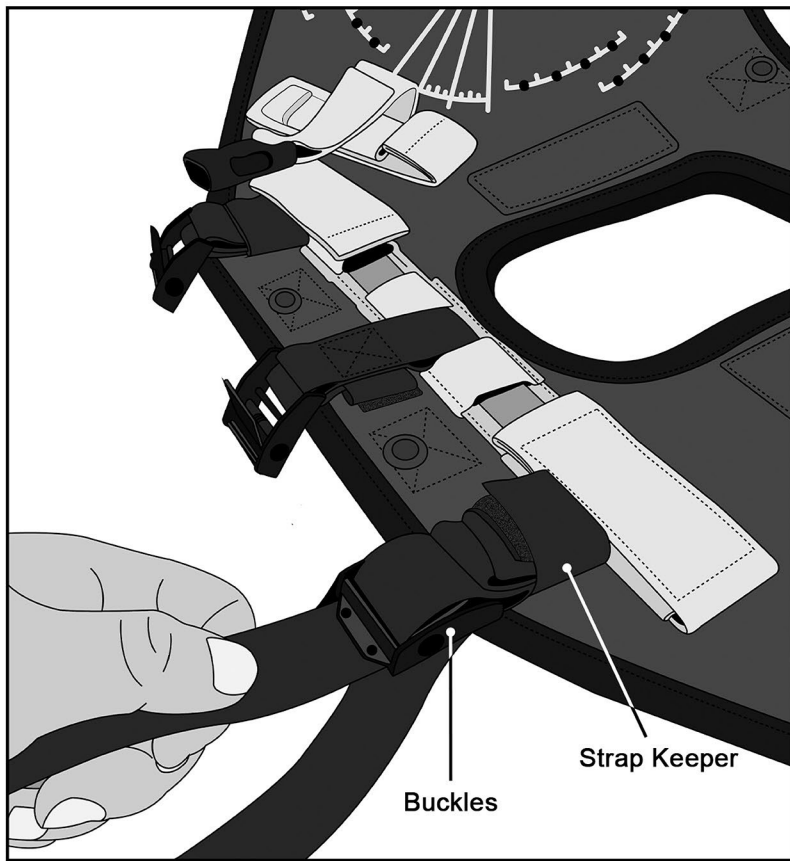


Fig 5. Securing the harness straps

Step 5:

Now wrap the leg straps through the passenger footpegs or other motorcycle frames. See Fig 6.

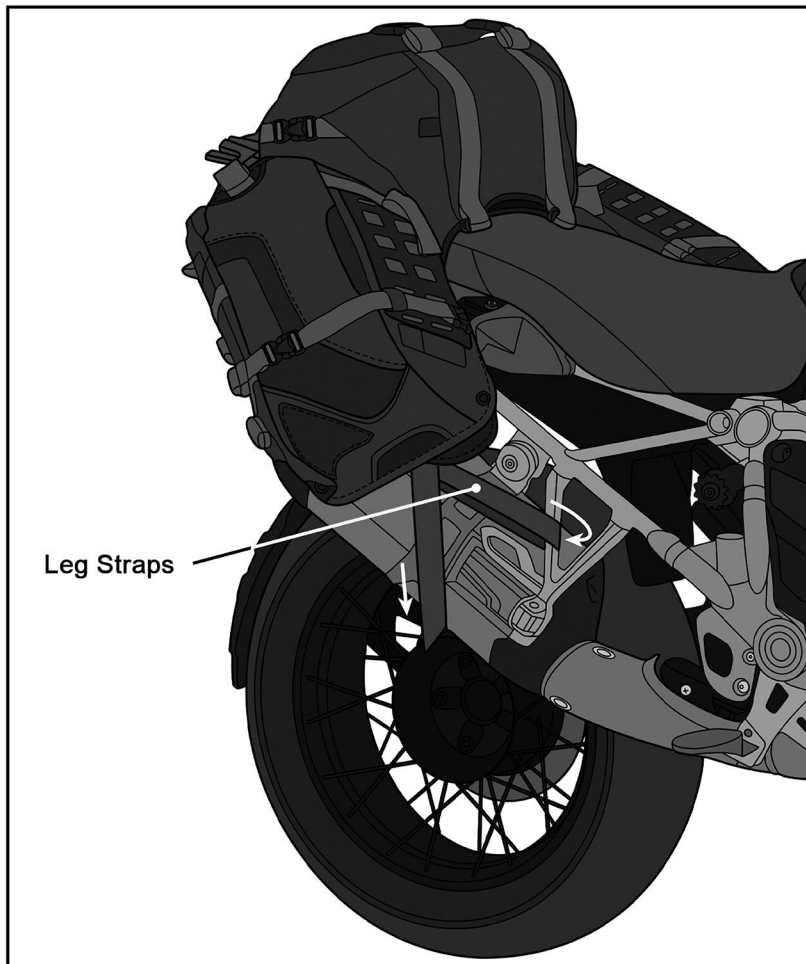


Fig 6. Securing the leg straps

Step 6:

Install the 4L Backup Pockets to the sides of your legs using five 6mm bolts(VII), washers(VIII), and blind nuts(VI).

Step 7:

The Odyssey Luggage system is not resistant to heat. Place the heat shield included in the kit on your exhaust in a location that protects the bag. Once fully tightened, cut off any excess hose sticking out.

Congratulations! You have successfully installed the Viking Odyssey Luggage System 80L and are now ready to ride.

Warnings!

- Do not install if any of the mounting hardware is damaged or impaired.
- If you have any questions or concerns about the installation, call Viking Bags or consult your local mechanic.
- Ensure no part of the bag obstructs any of the moving parts of the bike.
- Viking Bags is not liable for any damage or malfunctions caused to your motorcycle during the installation process.
- Improper loading can cause vehicle handling problems leading to death or severe injury.
- Periodically check the bolts on your bike for tightness.
- Double exhausts, additional uncovered or exceptionally hot-running exhausts, might require an additional heat shield.
- Check your heatshield placement from time to time, improper installation of the heatshield can lead to damage to your bag.