

2nd Gen Heavy Duty WIRED Backup Cam System with 7" LCD! With 1080P Cam, Super Night Vision! Instructional Manual

————— SAFETY DRIVING



Please read this instruction manual care fully before operating this device

LCD COLOR MONITOR OPERATING INSTRUCTIONS

In order to operate this device properly, please read this operating instruction manual carefully and keep it for future reference

LCD COLOR MONITOR OPERATING INSTRUCTIONS

1. Appearance and functions

- 7" LCD Monitor




1. Remote control
2. Switch between Cams: Video1(Camera 1:AHD1/CVBS1)/_Video2(Camera 2:AHD2 /CVBS2)
3. Enable/Disable parking grids lines / When i Menu Settings: Select/Ok Button
4. Menu settings: PIC-CAR-MODE-SET
5. Select button left
6. Select button right
7. Power on/off
8. Remote Sensor

REMOTE CONTROL

■ Replace the battery of Remote Controller






1. Power Button
2. V1/V2 Mode Button
3. Select Left Button
4. Menu Button
5. Select Right Button
6. Enable/Disable Parking Grid Lines

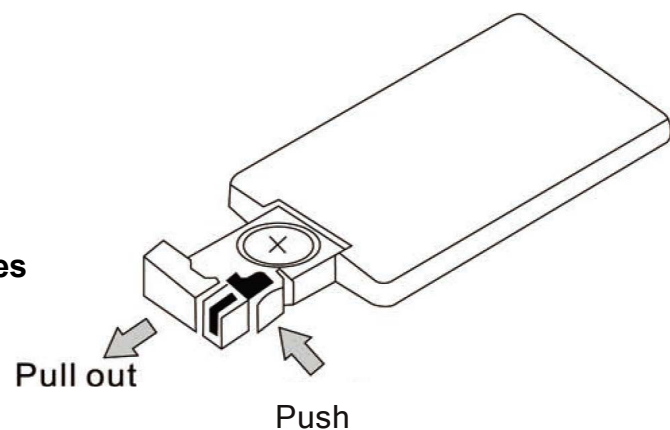


Standard Monitor Installation Directly On A Dash

Use included screws to directly screw U type bracket mount.

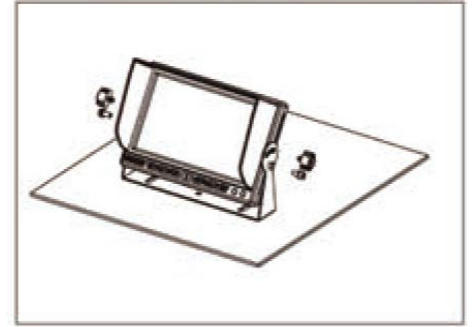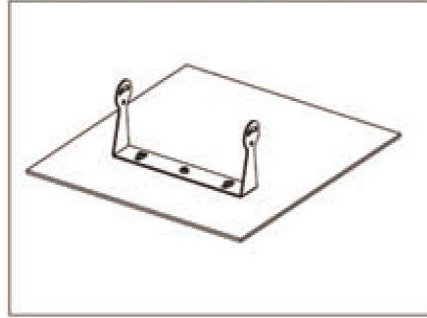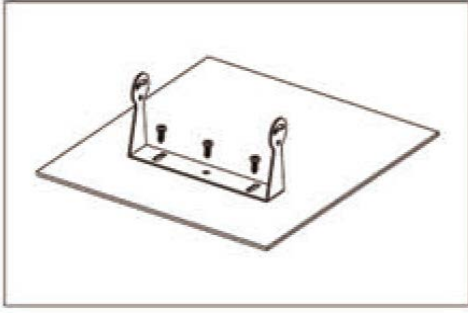


The adjustable angel is forward 30° and backward 30°

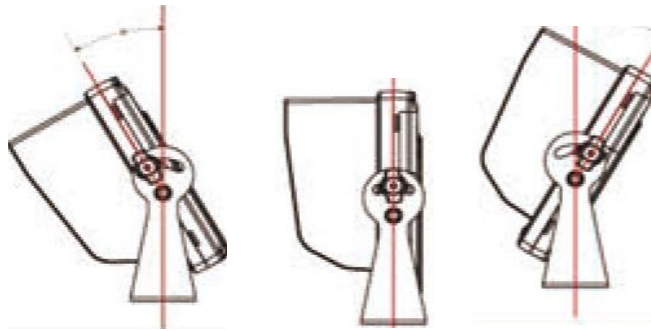


OPERATING INSTRUCTIONS

- (1) Referring to the remote battery diagram. Pull out the plastic within the battery compartment.
- (2) When using the remote controller, it should be directly aimed at the sensor window to work properly.
- (3) Press Power button on remote or on monitor
- (4) Example of installation diagram below:

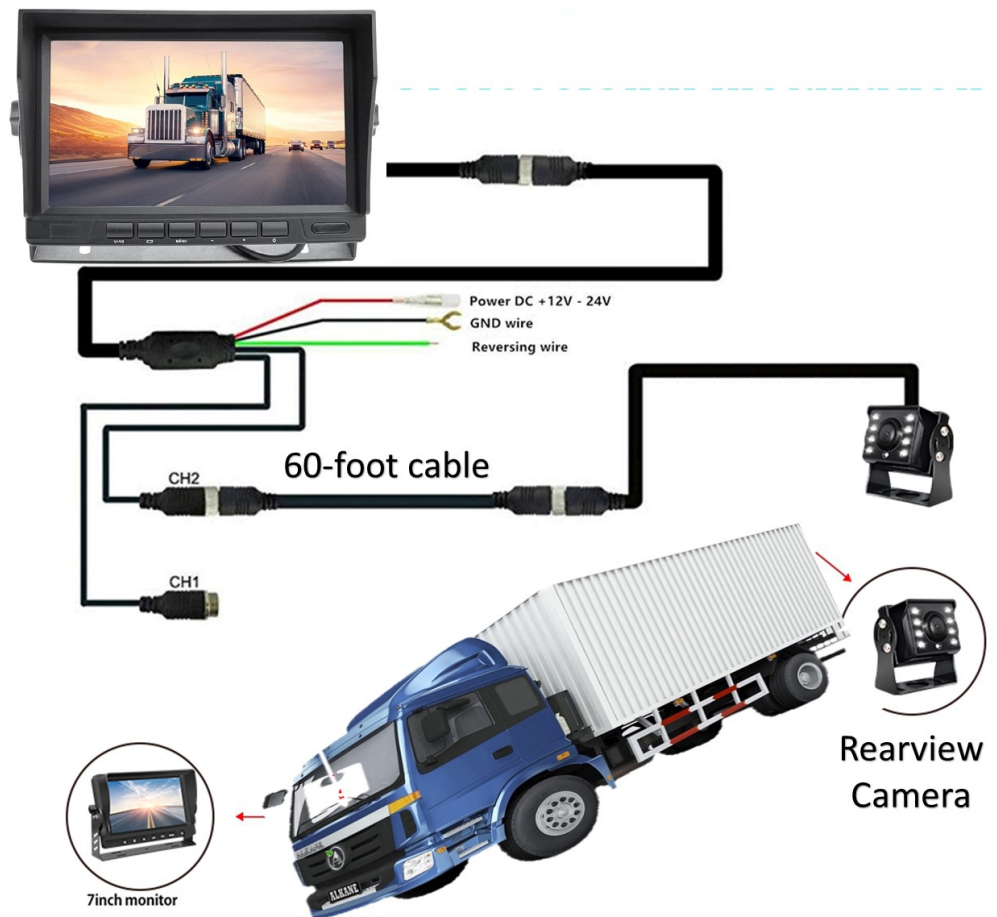

Additional Parameters:

- Display size: 7"
- Display format:1024 x 600P
- System:NTSC/PAL
- Power supply:DC 9V-36V
- Power::S 3W
- Resolution:1920x1080p
- Two ways:AHD/CVBS input
- Car reversing function. image switch to V2
- Remote control full function,OSD menu
- Brightness:450cd/m2
- Adjustable contrast, color and brightness

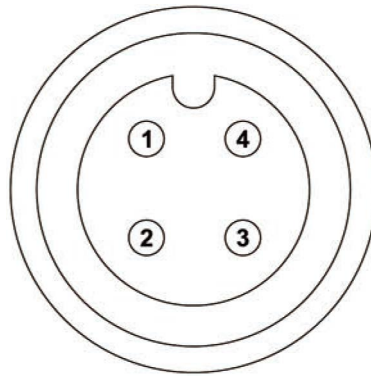

Male:

1. Video in(AHD.CVBS)
2. Audio in (or Empty)
3. Ground out
4. Power out+12

WHAT'S INCLUDED

