
WIFI LICENSE PLATE BACKUP CAMERA, USE SMARTPHONE TO VIEW VIDEO USER MANUAL



Installation:

- A. Wireless Signal connected to WIFI network mobile device
- B. Installed backup camera
- C. Connect Yellow Cable and Red wire to positive to vehicles reverse backup wire

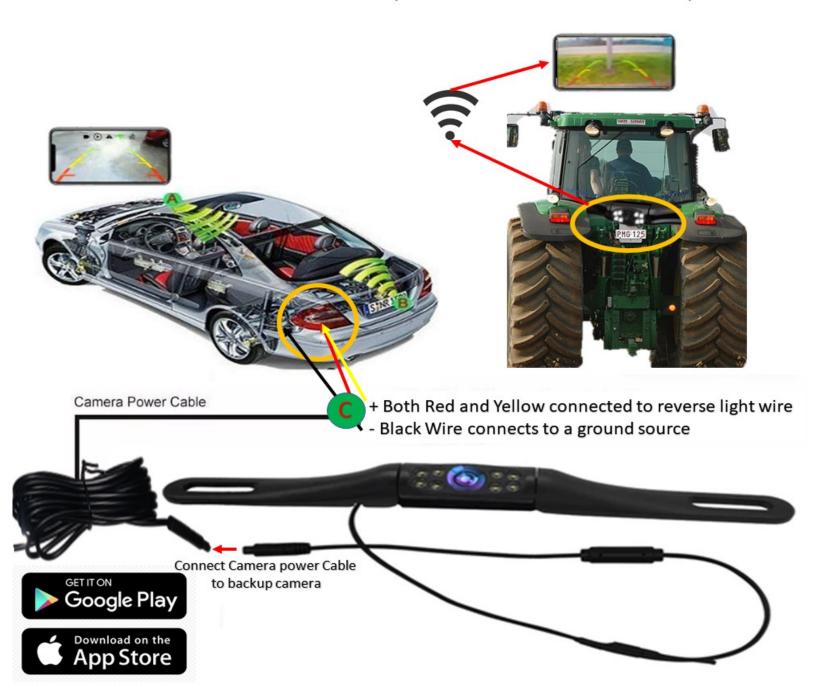


SCAN QR CODES FOR FREE VIEWING SOFTWARE

iOS download











Website download

Steps by Step process to connect mobile app to backup camera:



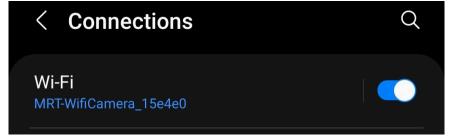

- 1. Open the MRT-Camera APP and click the WIFI connection button. Or directly open the network settings in phone settings.
- 2. In the pop-up wlan/WIFI connection setting interface, turn on wlan/WIFI and refresh the search WIFI signal.
- 3. Find and connect the WIFI signal named MRT-WifiCamera_xxxxxx. (Note: xxxxxx is a 6-digit device ID.)
- 4. When the device prompts whether to keep the WIFI connected, choose to keep the connection.
- 5. Return to the APP to use the WIFI rear-view camera normally. When the connection is successful, the WIFI button icon is displayed in green.

Main functions:

- Intelligent video recording function and sharing function can be archived after connecting to smart devices via WIFI.
- With intelligent electronic rearview mirror function you can watch what's behind the car in real time when in rear viewing mode.
- Intelligent monitoring function can be installed in front, rear, left and right side of vehicle based on your blind spots.

Downloading Android APP

Option 1:

Download the Android app using the scan software or QR code on this manual. After the down is complete, click install.

Option 2:

Search for MRT-Camera in the Google Play, then download and install it.

Downloading iOS APP

Option 1:

Download the Android app using the scan software or QR code on this manual. After the down is complete, click install.

Option 2:

Search for MRT-Camera in the iOS App store, then download and install.

Installation Options

Rear view installation:

Tie the Red and Yellow cable together. Connect both red and yellow cables with vehicles reverse wire lamp+. Connect black cable to ground.

Front\left\right view installation:

Red cable connects with ACC 12-24V, black cable connects with GND Yellow cable will not be used

APP ICON DEFINITIONS:



video recording



take a photo



video and photo playback



Click to select WIFI network and view strength signal



Image mirroring



Setting the reverse scale switch