

FalconEye MDVR Wiring Diagram - Jan, 2017

Connect the LCD using the yellow RCA Cable (male to female connections)



Red 12v, connect to Direct Current 12v
(Recommended that you tie positive power into MDVR power positive brown/yellow)

Blue 12v, Will not use, not necessary

Black 12v Cable will connect Ground/Negative
(Recommended that you tie ground into MDVR ground blue/black)




Will not use Red
or Black
Connectors HERE

7" or 10" LCD Connection Diagram

Blue or Black (depending upon model) 12v Cable will connect Ground/Negative
(Recommended that you tie ground into LCD Black Ground Cable)

Brown or Red (depending upon model) tie together with Yellow/Blue 12v, connect to Direct Current 12v
(Recommended that you tie ground into LCD Red Positive Cable)

Yellow or Blue (depending upon model) tie together with Brown/Red 12v, connect to Direct Current 12v
(Recommended that you tie ground into LCD Red Positive Cable)

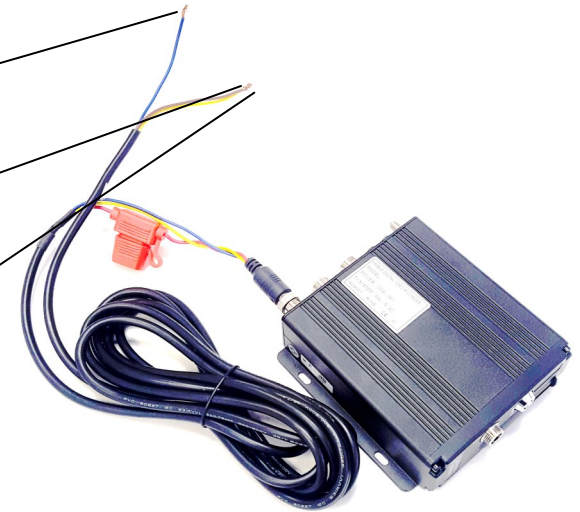

MDVR 4m Power Connection Diagram