


## Wiring diagram for Midtown LED Recessed light units with Dimmable CC LED driver

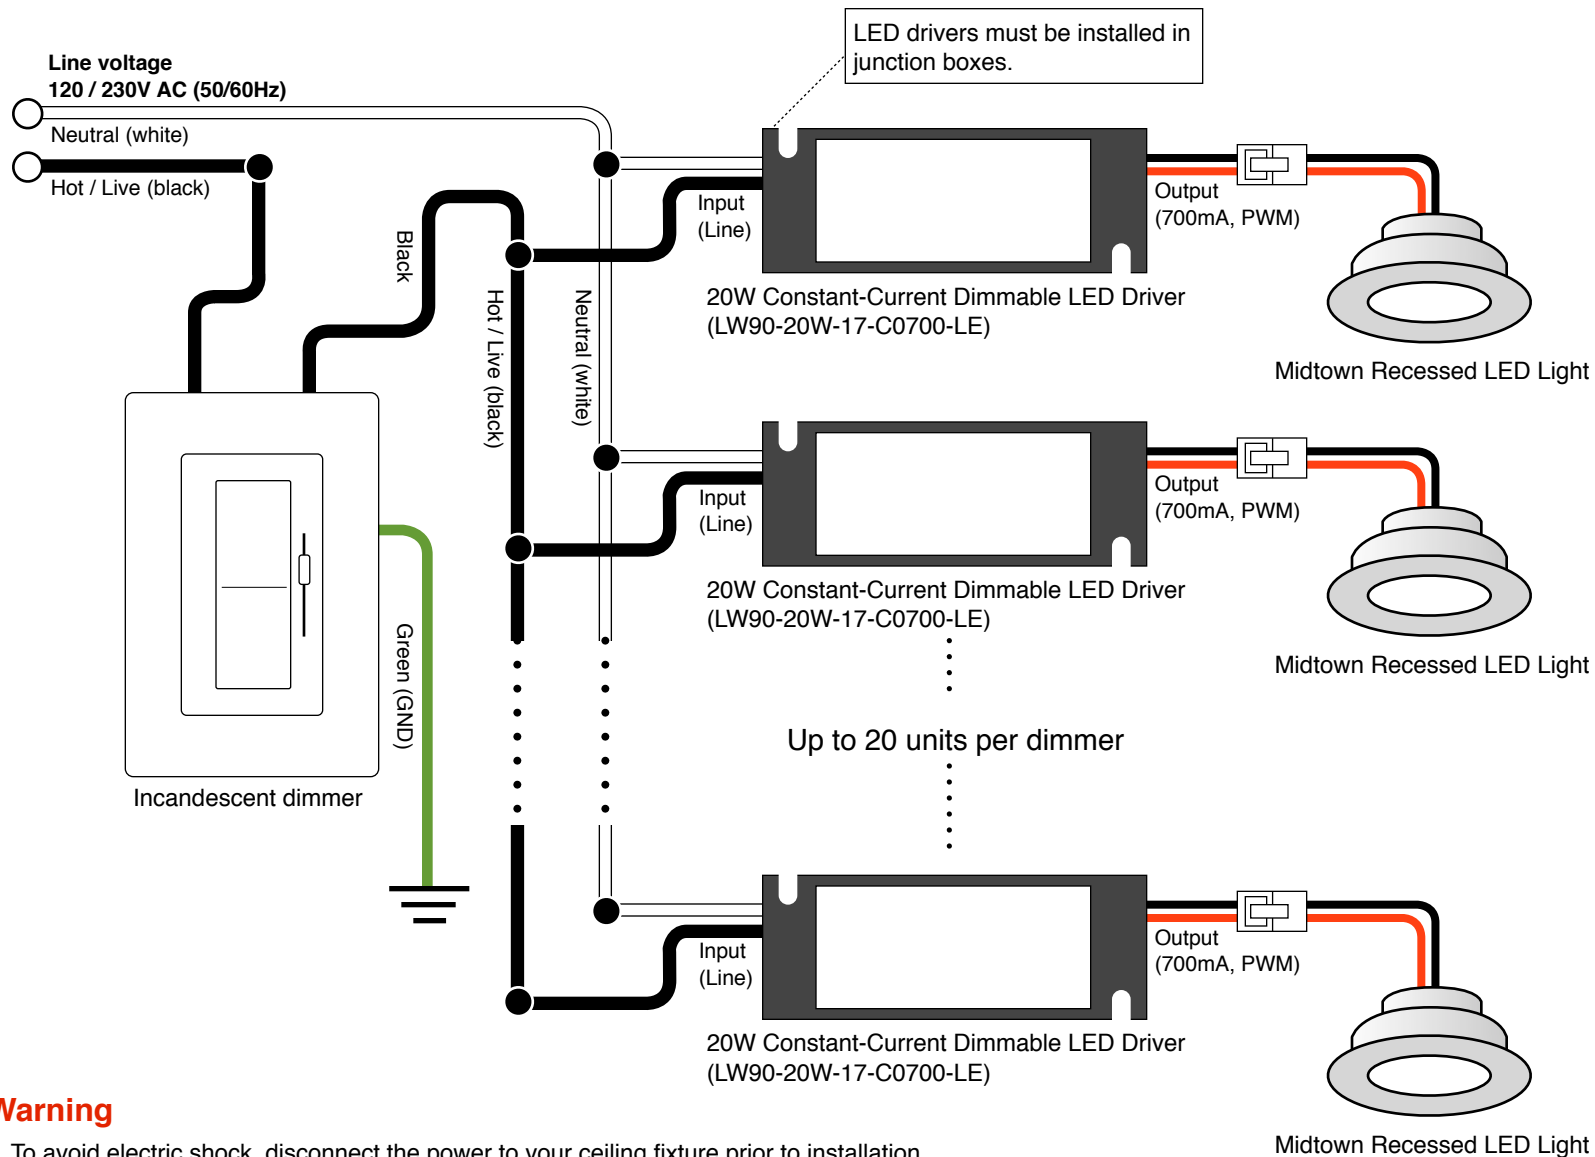

### Warning

- To avoid electric shock, disconnect the power to your ceiling fixture prior to installation.
- Keep this item away from flammable materials.
- Do not seal LED fixture in an air-tight enclosure.
- This unit is suited only for DRY or DAMP environments with temperatures between -25°C and +40°C.
- Do not install this unit in an airtight enclosure; air flow is required for heat dissipation.
- Allow at least 3" (76mm) of clearance (free of insulation and other flammables) above/around the LED driver and other electronics.