


Wiring diagram for PR15 LED Recessed light units with Dimmable CC LED driver

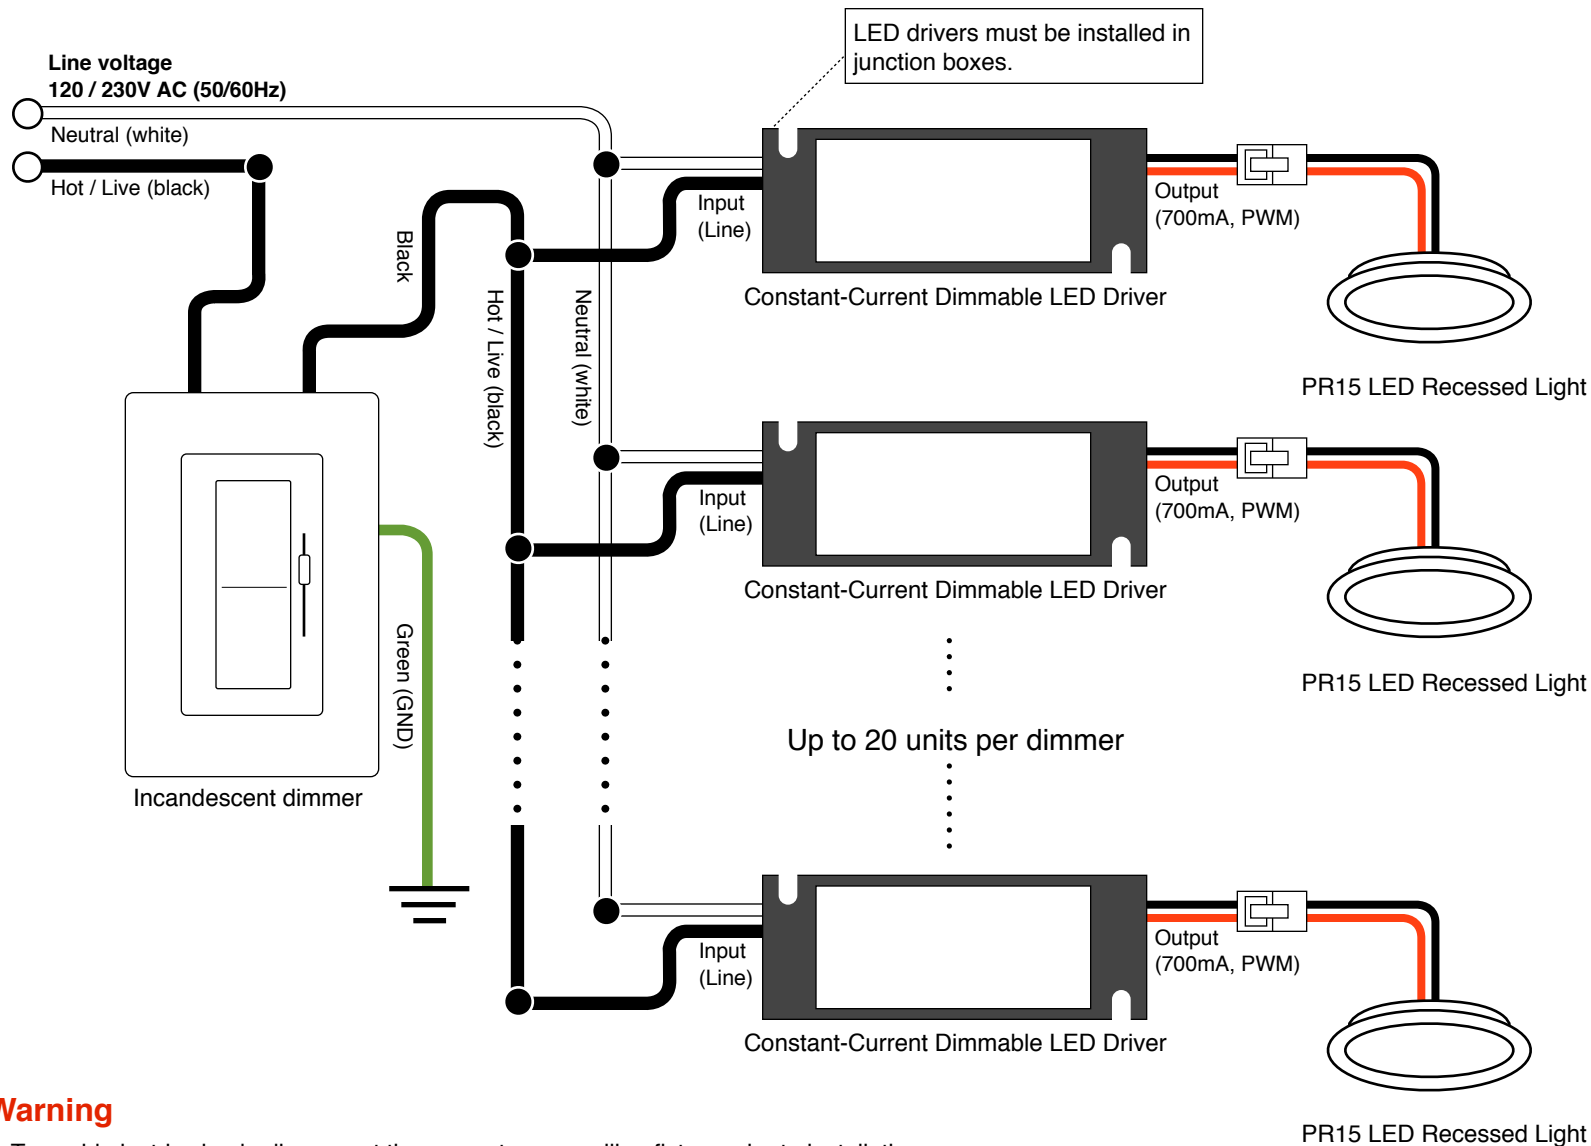

Warning

- To avoid electric shock, disconnect the power to your ceiling fixture prior to installation.
- Keep this item away from flammable materials.
- Do not seal LED fixture in an air-tight enclosure.
- This unit is suited only for DRY or DAMP environments with temperatures between -25°C and +40°C.
- PR15 light fixture is IC rated.