



QIK RETROFIT™

BUYER'S GUIDE



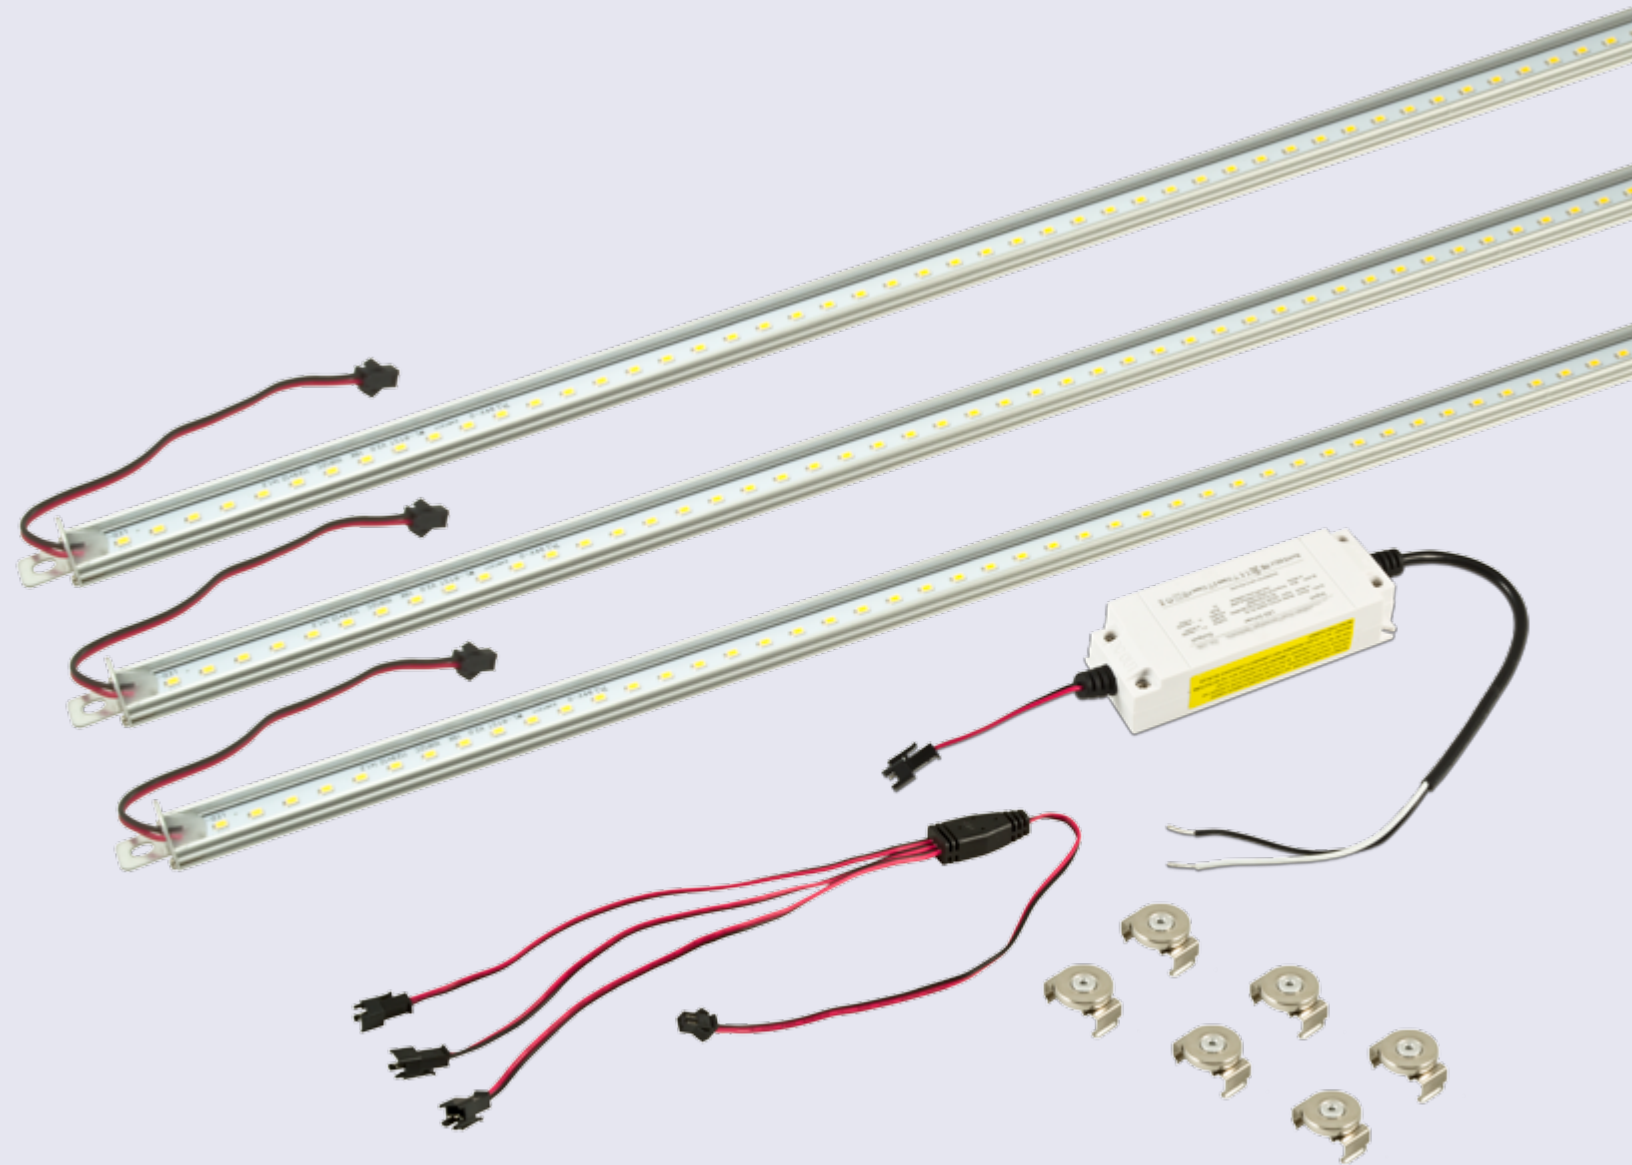

- QIK installation with existing luminaire body in 3 minutes.
- **Mounting method: Magnetic, QIK-connect.**
- 126lm/w.
- Ideal almost any fluorescent troffer.
- Flicker free, smooth and comfortable light.
- 5 year warranty.

QIK RETRoFIT	2X2ft	2X2ft	2X4ft
Item #	LWQR2X2-30W-W4000K	LWQR2X2-40W-W4000K	LWQR2X4-40W-W4000K
Lumens	3,750-4,050Lm	5,000-5,400Lm	5,000-5,400Lm
Watt	30W	40W	40W
# of PCB	2	3	2
Lumens/W	135L/W	135L/W	135L/W
Color Temp	4000K	4000K	4000K
Input Voltage	100~277VAC	100~277VAC	100~277VAC
Warranty	5 years	5 years	5 years
CRI	> 80	> 80	> 80

- ETL & DLC; LM80 available.
- 130lm/w.
- High quality isolated driver with efficiency > 87%; PF> 0.9.
- Suitable for installation 2X2, 2X4 in almost all fluorescent recessed (2x2, 2x4 units).
- 5 years warranty.
- CCT : 4000K.

New York State Certified
Service-Disabled Veteran-Owned Business