

Work LED



- GARAGES
- GAS STATIONS
- TUNNELS
- FACTORY
- WAREHOUSE FLOORS
- OUTSIDE & UNDERGROUND PARKING FACILITIES



Work LED

| SKUs | Watts | Lm/W | Lumens | Kelvin | CRI | # of LED | Viewing ° | Voltage | Hertz |
|---------------------|-------|------|--------|--------|-----|----------|-----------|------------|---------|
| LW-WL1-C-60W-5000K | 60 | 130 | 7,800 | 5,000 | >80 | 512 | 235° | 100-277VAC | 50/60Hz |
| LW-WL1-C-100W-5000K | 100 | 128 | 12,800 | 5,000 | >80 | 704 | 205° | 100-277VAC | 50/60Hz |

| SKUs | EQUIVALENTS | | | |
|---------------------|-------------|------|------|------|
| | CFL | MHL | HPS | HID |
| LW-WL1-C-60W-5000K | 150W | 200W | 200W | 200W |
| LW-WL1-C-100W-5000K | 200W | 300W | 300W | 300W |

| Product name | LED Luminaires | | | | |
|--------------|----------------|------------------|----------------|--------------------|--------------------|
| Dimension | A | C | D | E | F |
| Stent type | Hook Mount | Round Pipe Mount | Magnet Mount | 1/4 NPT Stem Mount | 5/8 NPT Stem Mount |
| Product size | ∅ 170 x 329 mm | ∅ 170 x 286 mm | ∅ 170 x 280 mm | ∅ 170 x 284 mm | ∅ 170 x 284 mm |



Work LED

60W & 100W Hanging Work Light IP65 Rated, Reliable, Weatherproof and Tamper-Resistant Powerful Portable Illumination


Ensure a well-lit and safe job site with the lightweight yet rugged hanging LED Waves Work Light.

Always on the job, our LED Work Light withstands tough environmental conditions and casts bright 7,800 or 12,800 lumens of dependable illumination. Weather- and theft-resistant construction includes an attached 10-foot cord to allow for easy set up and removal in all outdoor and interior job sites.

Backed by a 5-year warranty; UL safety certified.


Ideal for use in:

- Outdoor Construction Sites (Operating Temp -20° to 45°C)
- Interior Building Sites, such as Tunnels, Garages & Parking Facilities
- Service Station Work Bays

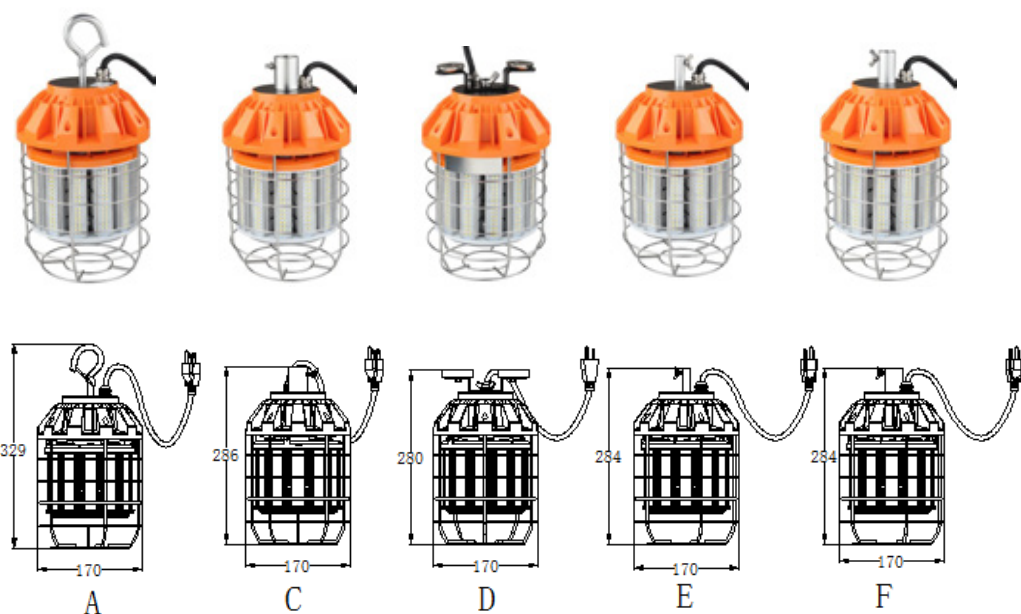



Work LED

Hook Mount

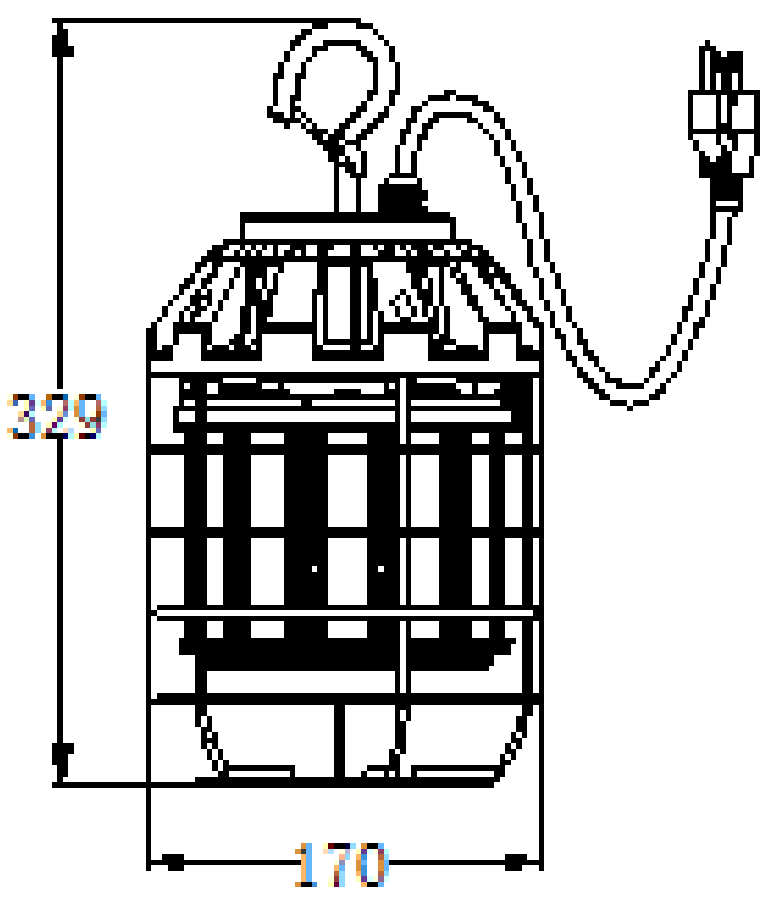


Work LED

Pipe Mount

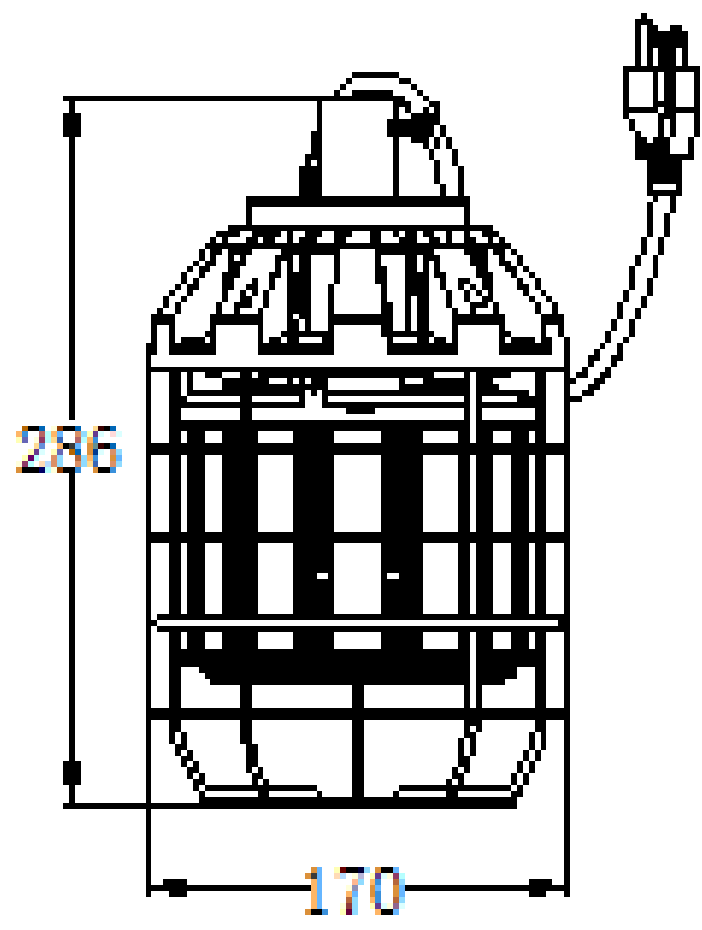

Work LED

Magnet Mount


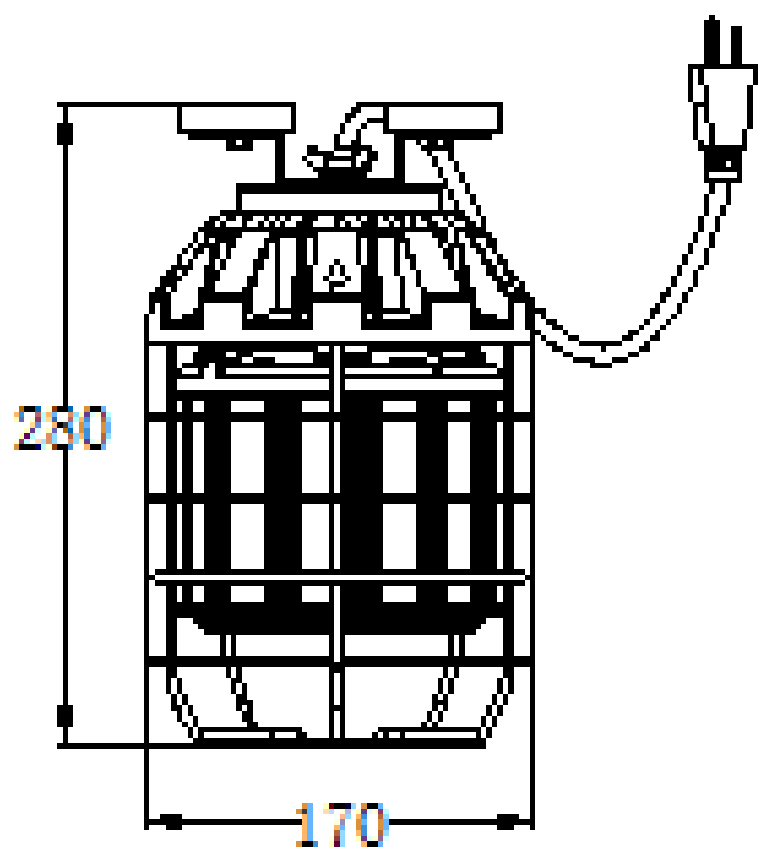


D




Work LED

1/4 NPT Stem Mount


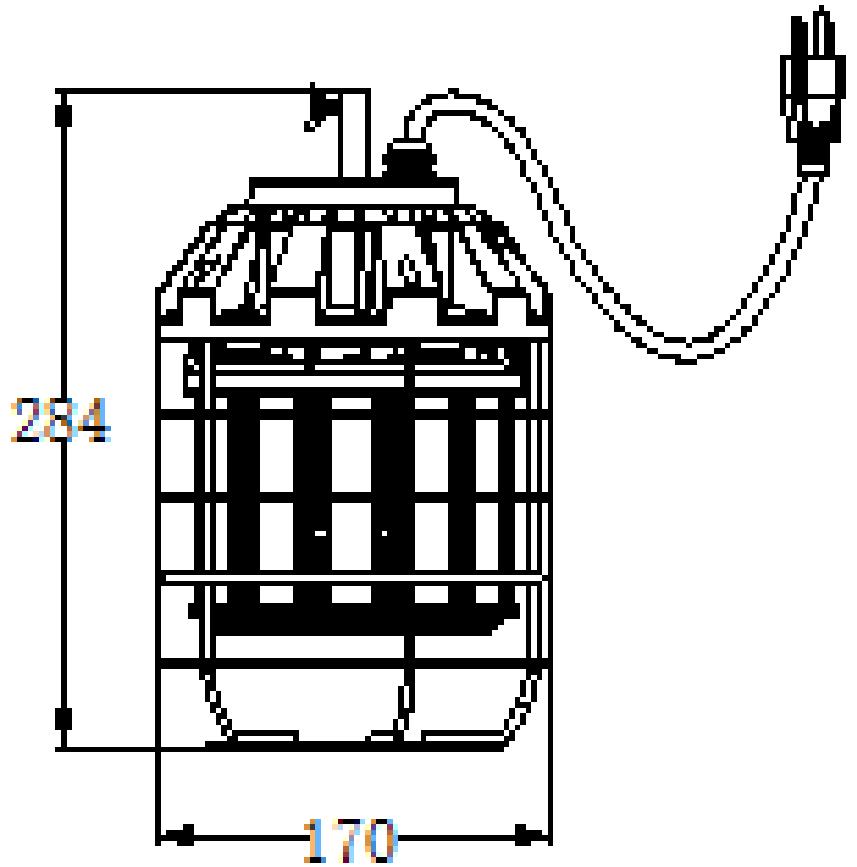


Work LED

5/8 NPT Stem Mount

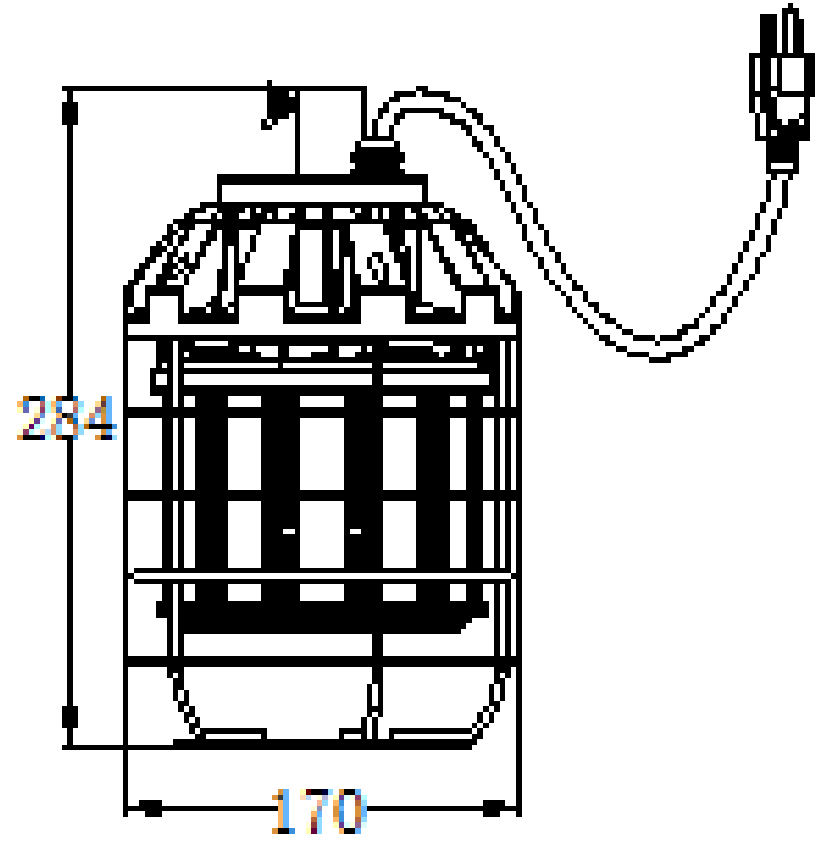

Light Distribution Curve

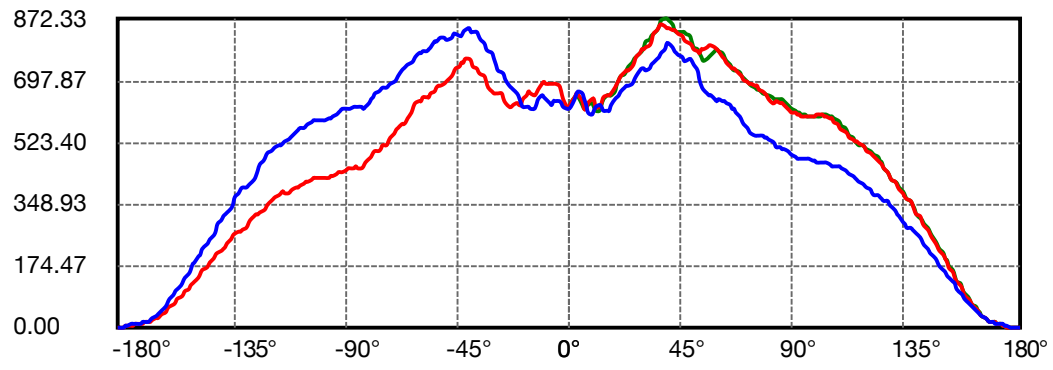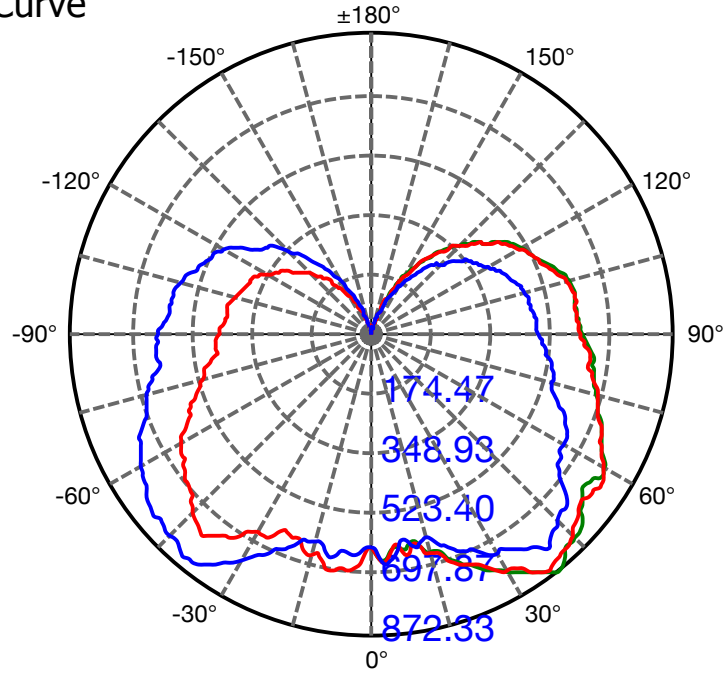

C22.5(Max): ———
 C0/C180: ———
 C90/C270: ———

Field angle(10%Imax):C0/180Left:192.2 Right:121.7
 :C90/270Left:118.6 Right:197.9
 Beam Angle(50%Imax):C0/180Left:131.1 Right:91.1
 :C90/270Left:85.7 Right:154.6

Equipment: Goniophotomete
 Temperature(°C): 0.0

Date: 2017
 Humidity(%): 0.0%


Distance(m): 9.24



Work LED

60W

Lux Distance Curve

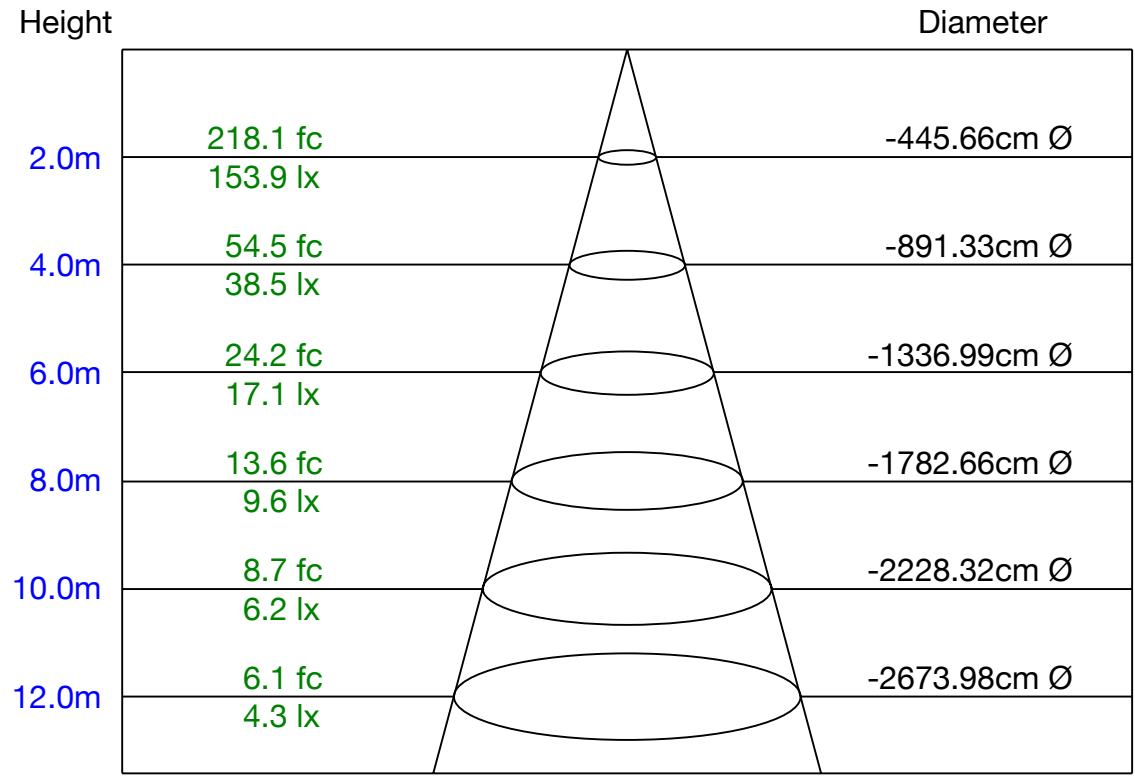

Max , Ave Beam angle of C22.5plane265.66



Equipment: Goniophotomete
Temperature(°C): 0.0

Date: 2017
Humidity(%): 0.0%

Distance(m): 9.24



Light Distribution Curve

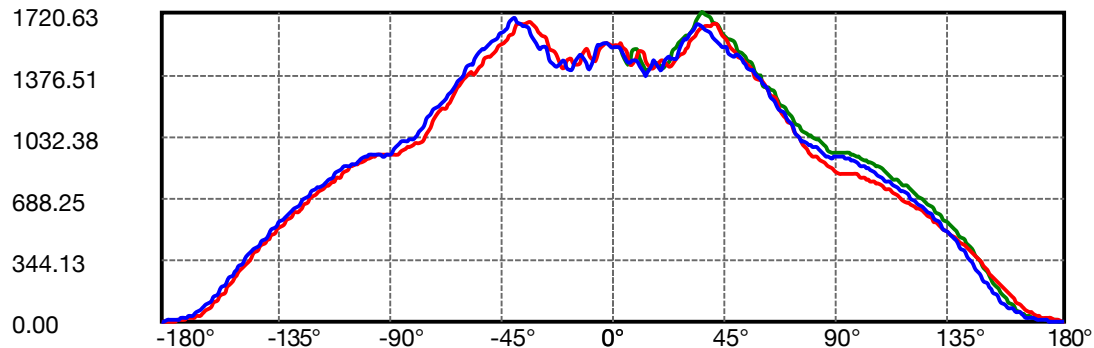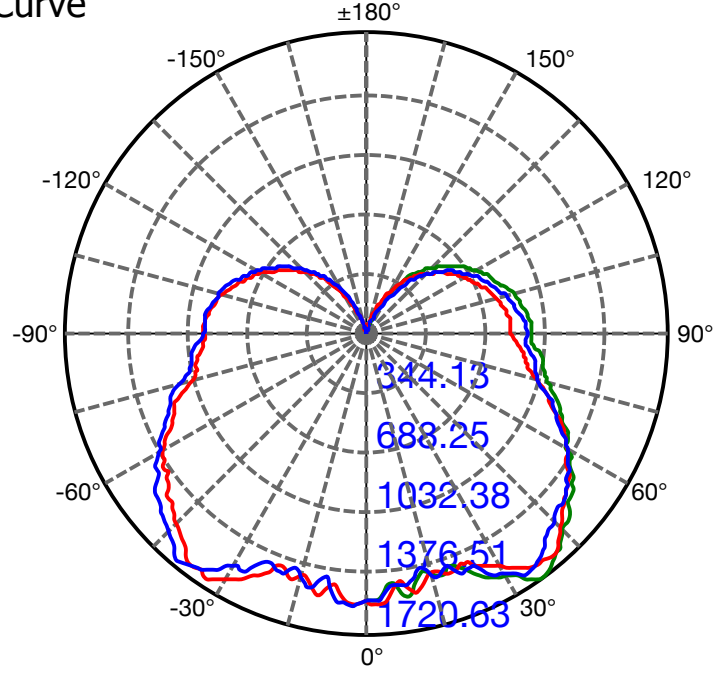

C45(Max): —
 C0/C180: —
 C90/C270: —

Field angle(10%Imax):C0/180Left:121.9 Right:190.4
 :C90/270Left:117.0 Right:191.5
 Beam Angle(50%Imax):C0/180Left:73.7 Right:121.5
 :C90/270Left:68.8 Right:142.8


Equipment: Goniophotomete
 Temperature(°C): 0.0

Date: 2017
 Humidity(%): 0.0%

Distance(m): 9.24



Lux Distance Curve

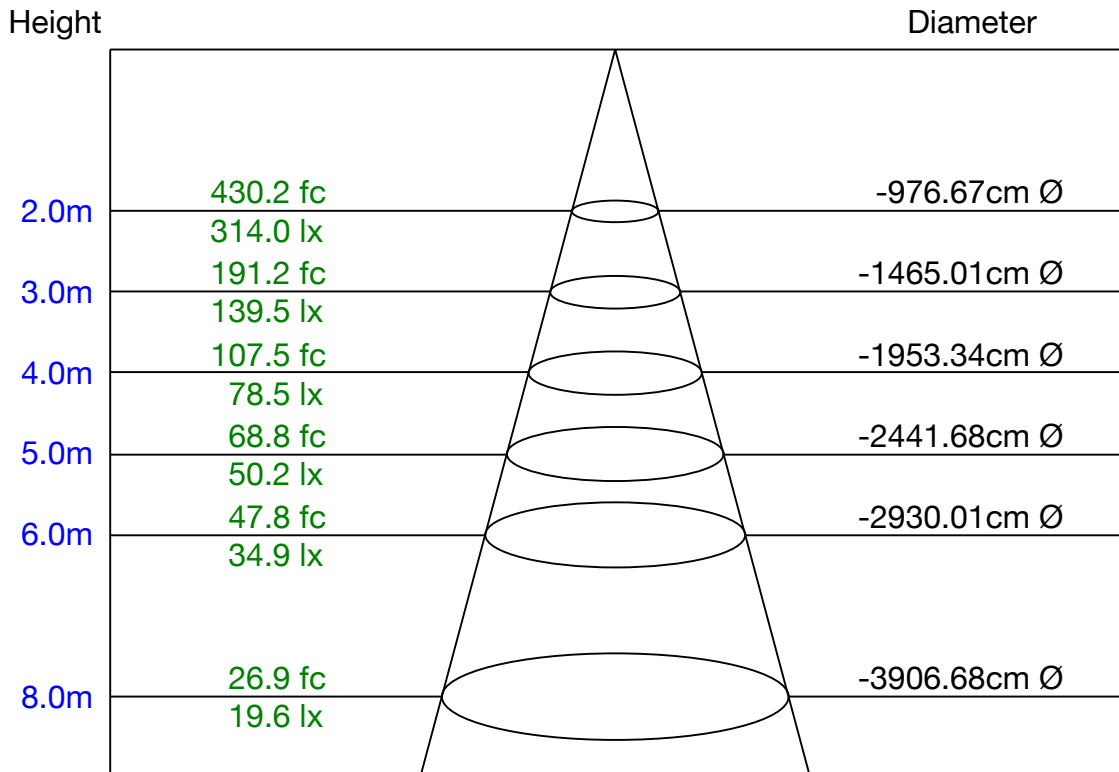

Max , Ave Beam angle of C45plane225.22

Equipment: Goniophotomete
Temperature(°C): 0.0

Date: 2017
Humidity(%): 0.0%

Distance(m): 9.24



Work **LED**

LedWaves **Waves Of The Future**

Customer safety and satisfaction is paramount at LED Waves.

Please do not hesitate to contact us

TOLL-FREE at
1-800- 986-0169

**Professional grade technical support
and Consultations**

LED Waves is a Service Disabled Veteran Owned Small Business.

