

INSTALLATION GUIDE



172107 Bucket Set
TOYOTA TACOMA (2016-2018)



BILL OF MATERIALS

ITEM	QUANTITY
Driver Seat Back Cover	1
Driver Seat Bottom Cover	1
Passenger Seat Back Cover	1
Passenger Seat Bottom Cover	1
Headrest Cover	2

Seat Backs & Bottoms have tag signifying Driver or Passenger

General care instructions:


1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

1 - Preparation



- 1.1 - Slide seat forward and raise to highest position, if possible.
- 1.2 - Remove headrest by pressin in tabs at base of headrest and pulling up

2 - Install Seat Back Cover

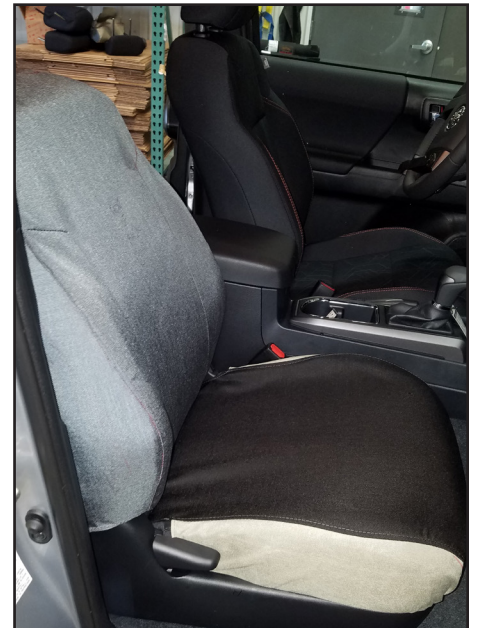

- 2.1 - Undo two elastic straps holding seat back flap, from under seat bottom.
- 2.2 - Tip seat back flap up and tuck inside cover as you pull it down.
- 2.3 - Turn seat back cover 3/4 of the way inside out.
- 2.4 - Pull seat back cover over seat back, making sure the holes in the cover align with the holes in the seat back.
- 2.6 - Stretch the cover over the headrest holes.
- 2.7 - Continue pulling the cover down the seat back, turning it right side out as you go.
- 2.8 - Push flap from front of cover between seat and seat bottom, out the back of the seat.
- 2.9 - Pull flap tight and attach to Velcro on seat back.

For assistance with installation, call us at 507.246.3545





3 - Install Seat Bottom Cover



- ❑ 3.1 - Put cover over seat bottom.
- ❑ 3.2 - Tuck outside of cover behind plastic trim. Tuck inside of cover between seat bottom and center console.
- ❑ 3.4 - Tuck outside string between seat bottom and trim, where the back and bottom meet. Run inside string between seatbelt and seat, then under seat bottom.
- ❑ 3.5 - Pull strings tight.
- ❑ 3.6 - Tie a loop in one string. Run the other string through the loop, pull tight, and tie string back on itself. It is important to pull tight as this is what keeps your cover from shifting.
- ❑ 3.7 - Push top flap between seat back and seat bottom.
- ❑ 3.8 - Run front flap over seat adjustment lever, wires, and brackets.
- ❑ 3.9 - Pull front flap tight and fasten to Velcro on top flap.

4 - Install Headrest Cover

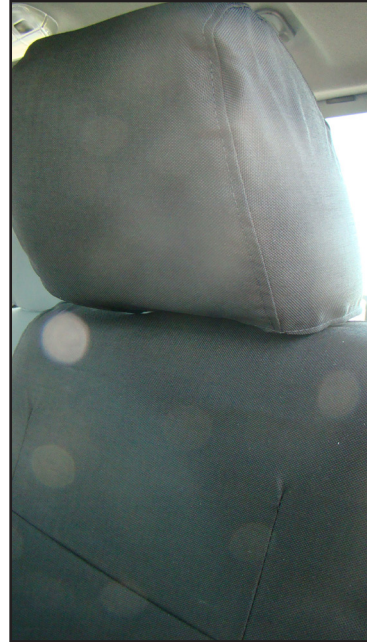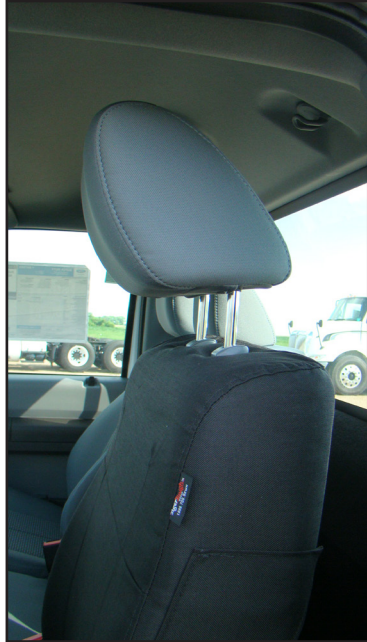

- 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 4.2 - Pull cover over head rest with “loop” Velcro in front and “hook” Velcro in rear.
- 4.3 - Fasten Velcro tabs together under headrest.

Congratulations!
You have successfully installed your TigerTough Seat Cover.

We're as impressed as you are! Tweet us a picture of your new covers @TigerToughGroup

