

INSTALLATION GUIDE



175505 Rear 60/40 Bench
TOYOTA TACOMA (2010-2015)



BILL OF MATERIALS

ITEM	QUANTITY
40 Portion (Driver's Side) Back Cover	1
40 Portion (Driver's Side) Bottom Cover	1
60 Portion (Passenger's Side) Back Cover	1
60 Portion (Passenger's Side) Bottom Cover	1
Headrest Cover	3

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

1 - Preparation



- ❑ 1.1 - Remove headrests by pressing in tabs at base of headrest and pulling up.

2 - Install Driver's Side Seat Back Cover




- 2.1 - Tip seat back forward by pulling strap on top of seat.
- 2.2 - Tip seat bottom up.
- 2.3 - Turn cover 3/4 of the way inside out and pull over seat back, ensuring that holes in cover line up with plastic trim for headrests.
- 2.4 - Work headrest holes around plastic trim.
- 2.5 - Pull cover down over seat back, unrolling as you go.
- 2.6 - Pull front flap tight and fasten to Velcro on back.

3 - Install Passenger's Side Seat Back Cover

- 3.1 - Tip seat back forward by pulling strap on top of seat.
- 3.2 - Tip seat bottom up.
- 3.3 - Slide cover behind seat belt.
- 3.4 - Put back flaps behind seat back.
- 3.5 - Work headrest holes around plastic trim.
- 3.6 - Fasten rear flaps together.
- 3.7 - Pull front flap tight and fasten to Velcro on back.

4 - Install Seat Bottom


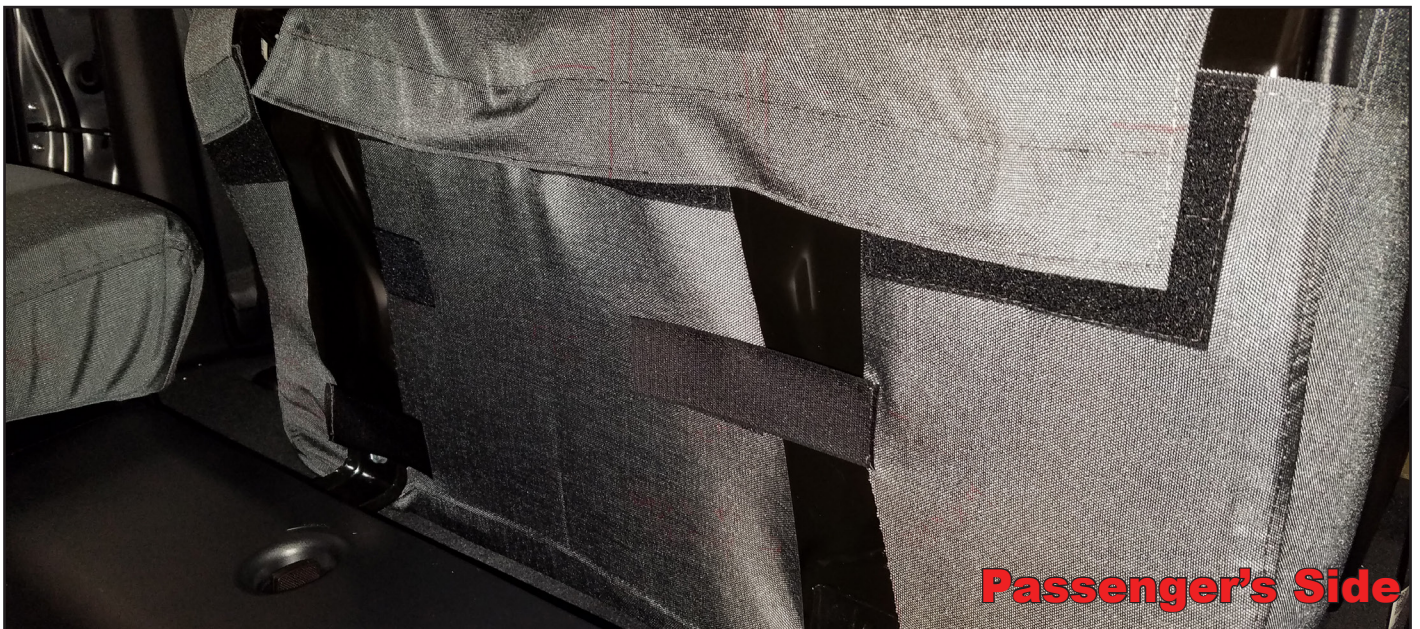


- 4.1 - Tip seat bottom up.
- 4.2 - Place seat cover over seat bottom.
- 4.3 - Attach Velcro straps as shown in picture.
Pull straps as tight as possible!

For assistance with installation, call us at 507.246.3545



5 - Install Headrest Cover

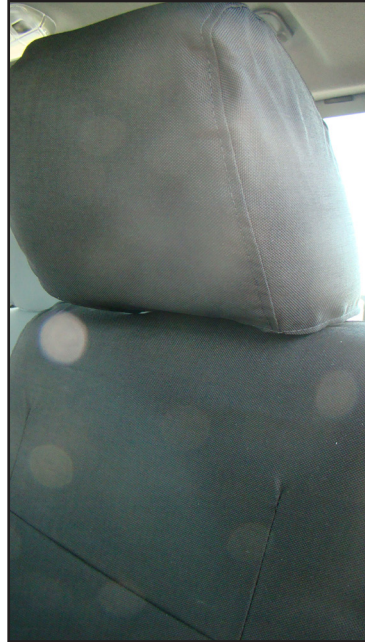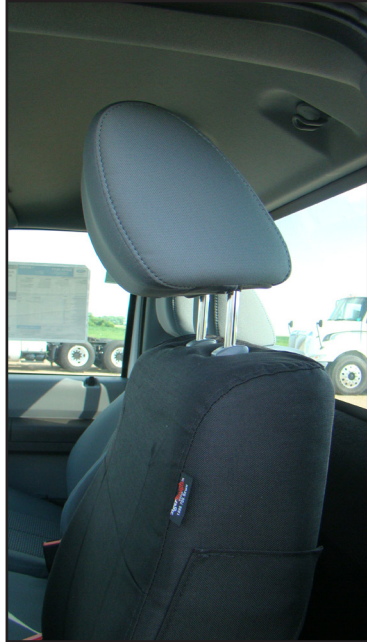

- 5.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 5.2 - Pull cover over head rest with “loop” Velcro in front and “hook” Velcro in rear.
- 5.3 - Fasten Velcro tabs together under headrest.

Congratulations!
You have successfully installed your TigerTough Seat Cover.

We're as impressed as you are! Tweet us a picture of your new covers @TigerToughGroup