

INSTALLATION GUIDE



55533 REAR SEAT W/O ARMREST

FORD EXPLORER (2006-2010)



BILL OF MATERIALS

| ITEM | QUANTITY |
|------------------------------|----------|
| 60 Portion Seat Back Cover | 1 |
| 60 Portion Seat Bottom Cover | 1 |
| 40 Portion Seat Back Cover | 1 |
| 40 Portion Seat Bottom Cover | 1 |
| Seat Headrest Cover | 2 |
| Center Headrest Cover | 1 |

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.





1 - Preparation



- ❑ 1.1 - Remove headrests by pressing in tabs at base of headrest and pulling up.

2 - Install Seat Bottom Cover

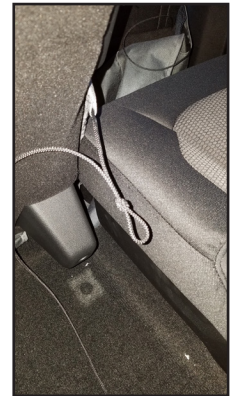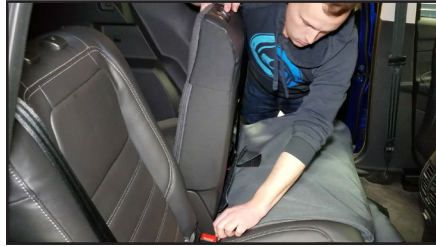

- 2.1 - Loosely fit cover over seat bottom.
- 2.2 - Push flap nearest to the middle into split between seat cushions
- 2.3 - Lean seat back slightly forward and push the Velcro flap between the seat back and bottom.
- 2.4 - Pull strings under seat and pull tight. Tie a loop in one string, close to the edge of the seat. Run the other string through the loop, pull tight, and tie string back on itself. It is important to pull tight as this is what keeps your cover from shifting.
- 2.5 - Flip whole seat forward.
- 2.6 - Run flap from front of seat under the seat.
- 2.7 - Pull flap as tight as possible and fasten to Velcro on top flap.
- 2.8 - Repeat on the passenger's side.



3 - Install Seat Back Cover



- 3.1 - Put seat cover over seat back, behind the middle seat belt.
- 3.2 - Push the holes on top of the cover around the headrest base pieces.
- 3.3 - Fold seat back down.
- 3.4 - Fasten the vertical velcro on the back of the seat together, starting at the bottom.
- 3.5 - Fold seat back up.
- 3.6 - Push the flap from the front between the seat back and bottom.
- 3.7 - Fold seat back down.
- 3.8 - Pull tight and attach it to the Velcro on the back of the seat.
- 3.9 - Repeat for passenger's side.



4 - Install Headrest Cover



- 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 4.2 - Pull cover over head rest with the long flap in the front.
- 4.3 - Fasten Velcro tabs together under headrest.

