

It's not rocket science,  
but following these  
instructions will make  
installing your seat covers  
a lot easier.

We promise.

<b>PART:</b>	<b>55566</b>
<b>PRODUCT:</b>	<b>60/40 REAR SEAT WITH ARMREST</b>
<b>PIECES:</b>	(1) 40 PORTION BACK (1) 40 PORTION BOTTOM (1) 60 PORTION BACK (1) 60 PORTION BOTTOM (1) ARMREST COVER (3) HEADREST COVERS

[ttcovers/55566video](https://www.ttccovers.com/55566video)



*Basically, you break it, we buy it.  
Seriously.*

**Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.**

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

### General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent. Drip dry or machine tumble dry on a no heat cycle. Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

# Install Seat Cover

page 1

Remove all three headrests.


Push in the buttons on the base of the mounts and push the headrest upward to remove.



Press the cover under the headrest mounts for a clean, finished look.

Unlatch the 60 portion seat back.

Tip the seat bottom up (this moves the seat back away from the back of the cab). Reach behind and release the seat back by pulling the little metal nubbin

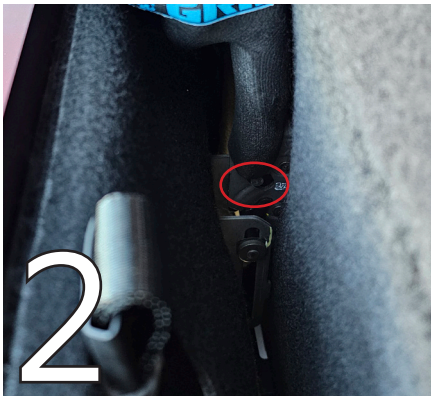

Make sure the latch is properly exposed at the back.

The release of the seat back is better explained in the install video.

[ttcovers.com/55566video](http://ttcovers.com/55566video)

Next, tip the seat back and bottom forward together by pulling the tab on the side of the seat bottom.



Tip the armrest down to pull it out through the gap in cover.

Undo all of the tabs on the seat back portion.

Slide it under the seatbelt, and work it down over the seat back as shown.



Work the "tail" of the armrest cutout up between where the armrest hinges on the seat. This is a tight fit! Moving the armrest back and forth will help.

# Install Seat Cover

page 2

Pull the 'tail' up and secure it to the tab on the inside of the cutout...



1

Pull them all tight and secure them as shown.



5

...it should look like this.



2



6

Put the armrest cover on.

Make sure the loop comes through the gap in the cover for it.

Push the three tabs between the seat back and bottom.



3



7

Work the little 'tail' from the bottom of the armrest through the gap where the armrest hinges (this is better shown in the video)

[ttcovers.com/55566video](http://ttcovers.com/55566video)

Tipping the seat back at an angle helps with this.

The little tab on the edge is there so that you don't have to pinch that wire.



4



8

Next up - the seat bottom.

Slide it on like a big pillowcase. The holes for the carseat anchors should be on top.

# Install Seat Cover

page 3

Work the cover all the way down the seat as shown.



Next up - the 20 portion seat back. Release it from the back of the cab by pulling the release loop on the side. Slide the cover on with the long flap at the front. Turning the cover partly inside out at first helps get it snug at the top of the seat.

Fasten the little flap on each side



Press the cover under the headrest mounts.

Push the flaps from the top of the seat between the seat back and bottom, and then pull them tightly and secure them on the bottom.



Make sure the release strap is coming through the hole in the side.

Make sure the little release loop is coming through the slot in the cover for it.



Unroll the cover the rest of the way down the seat back.

Push the flap in between the seat back and bottom.

# Install Seat Cover

page 4

Pull the tab tight and secure at the back.



Put the headrests back on and cover them.

The long tab goes towards the front, and secures up inside the back of the headrest.



Now, cover the seat bottom.

The holes for the carseat anchors should be on the top.



Same with the little middle headrest.



Push the flap from the top in between the seat back and bottom.

Pull it tight and secure it at the bottom.



And, you're finished!



Make sure the release loop is coming through the hole in the cover for it.

