

INSTALLATION GUIDE



62100 Bucket Set

CHEVROLET SILVERADO (2007-2014)
GMC SIERRA (2007-2014)



BILL OF MATERIALS

| ITEM | QUANTITY |
|-----------------------------|----------|
| Driver Seat Back Cover | 1 |
| Driver Seat Bottom Cover | 1 |
| Passenger Seat Back Cover | 1 |
| Passenger Seat Bottom Cover | 1 |
| Headrest Cover | 2 |

Seat Backs & Bottoms have tag signifying Driver or Passenger.


Ensure airbag patch (same side as the TigerTough tag) goes on the outside edge of the seat.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.



1 - Preparation

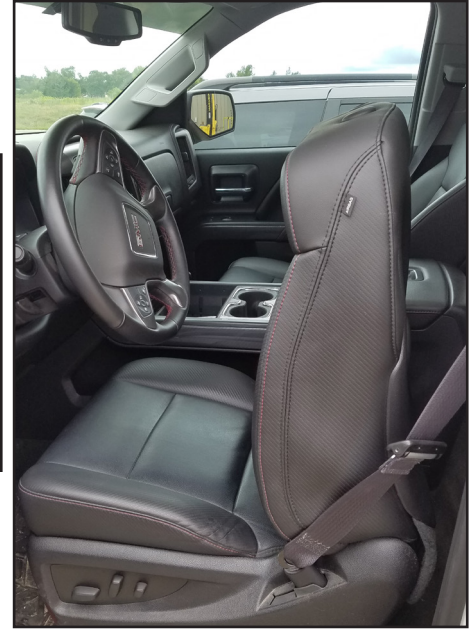

- 1.1 - Remove headrest by pressing in tabs at base of headrest and pulling up
- 1.2 - Slide seat forward and raise to highest position, if possible.

2 - Install Seat Back Cover



- 2.2 - Lean seat back forward.
- 2.3 - Turn seat back cover 3/4 of the way inside out and pull over seat back.
- 2.4 - Line holes in cover up with headrest holes and work holes around plastic trim.
- 2.5 - Continue pulling the cover down over the seat, unrolling it as you go.
- 2.7 - Push front flap between seat back and seat bottom.
- 2.8 - Pull front flap as tight as possible and fasten to Velcro on seat back.

For assistance with installation, call us at 507.246.3545



3 - Install Seat Bottom Cover



Seat cover string between seat bottom and plastic trim, where back and bottom meet.



- 3.1 - Put cover over seat bottom.
- 3.2 - Tuck cover behind plastic trim around seat. The seams in the cover will line up with seat seams.
- 3.3 - Tuck outside string between seat bottom and trim, where the back and bottom meet. Inside string goes under seat bottom, in front of rear seat mount.
- 3.4 - Push top flap between seat back and seat bottom. Pull tight to line cover up with seat bottom.
- 3.5 - Pull strings tight.
- 3.6 - Tie a loop in one string. Run the other string through the loop, pull tight, and tie string back on itself. It is important to pull tight as this is what keeps your cover from shifting.
- 3.7 - Run front flaps over all seat adjustment levers, wires, and brackets.
- 3.8 - Pull front flaps as tight as possible and fasten to Velcro on top flap.

4 - Install Headrest Cover



- 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 4.2 - Pull cover over head rest with “loop” Velcro in front and “hook” Velcro in rear.
- 4.3 - Fasten Velcro tabs together under headrest.

