

INSTALLATION GUIDE



62306 40/20/40 Without Underseat Storage

CHEVROLET SILVERADO 1500 (2014-2018)

CHEVROLET SILVERADO 2500-3500 (2014-2019)

CHEVROLET SILVERADO 1500LD (2019)

CHEVROLET SILVERADO 4500HD - 6500HD (2019)

GMC SIERRA 1500 (2014-2018)

GMC SIERRA 2500-3500 (2014-2019)



BILL OF MATERIALS

ITEM	QUANTITY
Driver Seat Back Cover	1
Driver Seat Bottom Cover	1
Passenger Seat Back Cover	1
Passenger Seat Bottom Cover	1
Console Back Cover	1
Console Bottom Cover	1
Seat Headrest Cover	2

Seat Backs & Bottoms have tag signifying Driver or Passenger.

Ensure airbag patch (same side as the TigerTough tag) goes on the outside edge of the seat.

Watch the installation video at ttcovers.com/62306video

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.



1 - Preparation



- ❑ 1.1 - Slide seat forward and raise to highest position, if possible.

Over the years Chevrolet and GMC have used 2 different headrest removal styles, depending on your Make/Model it could be either one.


2 Button Style

- ❑ 1.2 - Lift headrest up.
- ❑ 1.3 - Press both buttons at the base of the headrest and pull the headrest up out of the seat back

Pinhole Style

- ❑ 1.2 - Lift headrest up
- ❑ 1.3 - Insert a straightened paperclip into the pinhole at the base of the headrest closest to the door.
- ❑ 1.4 - While holding the paperclip in the base of the headrest press the button on the other base and pull the headrest up out of the seat back.

2 - Install Seat Back Cover

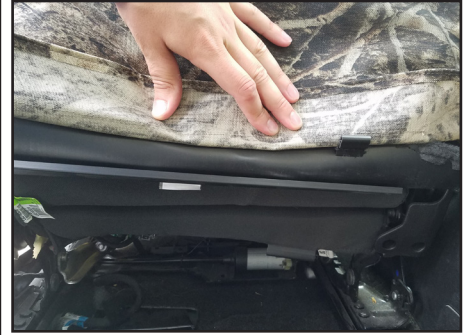

- 2.1 - Unhook both elastic straps from under the seat bottom to release the seat back flap.
- 2.2 - Lean seat back forward.
- 2.3 - Turn seat back cover 3/4 of the way inside out and pull over seat back.
- 2.4 - Line holes in cover up with headrest holes and work holes around plastic trim.
- 2.5 - Continue pulling the cover down over the seat, unrolling it as you go.
- 2.6 - Push factory seat back flap into space between seat back and seat bottom.
- 2.7 - Push front flap between seat back and seat bottom.
- 2.8 - Pull front flap as tight as possible and fasten to Velcro on seat back.

3 - Install Seat Bottom Cover



Seat cover string between seat bottom and plastic trim, where back and bottom meet.



- 3.1 - Put cover over seat bottom.
- 3.2 - Tuck cover behind plastic trim around seat. The seams in the cover will line up with seat seams.
- 3.3 - Tuck outside string between seat bottom and trim, where the back and bottom meet. Inside string goes under seat bottom, in front of rear seat mount.
- 3.4 - Push top flap between seat back and seat bottom. Pull tight to line cover up with seat bottom.
- 3.5 - Pull strings tight.
- 3.6 - Tie a loop in one string. Run the other string through the loop, pull tight, and tie string back on itself. It is important to pull tight as this is what keeps your cover from shifting.
- 3.7 - Run front flaps over all seat adjustment levers, wires, and brackets.
- 3.8 - Pull front flaps as tight as possible and fasten to Velcro on top flap.

4 - Install Headrest Cover



- 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 4.2 - Pull cover over head rest with “loop” Velcro in front and “hook” Velcro in rear.
- 4.3 - Fasten Velcro tabs together under headrest.

Install Seat Back/Console Cover.

- 1.1 - Lay console down.
- 1.2 - Tip lid up.
- 1.3 - Pull cover over lid, lining latch handle up with hole in cover.
- 1.4 - Close lid and tip console up.
- 1.5 - Pull cover between seat back and bottom.
- 1.6 - Pull cover up and over seat back.
- 1.7 - Lay console down.
- 1.8 - Pull rear side straps tight and fasten to rear of console.
- 1.9 - Lay console down.
- 1.10 - Open console.
- 1.11 - Fasten side straps behind hole for lid latch.

Install Seat Bottom Cover.

- 2.1 - Pull cover over seat bottom.
- 2.2 - Pull cover tight and fasten Velcro around bottom of cover to factory upholstery.
- 2.3 - Push top flap between seat back and seat bottom.
- 2.4 - Pull flap tight and push under rear of seat.
- 2.5 - Fasten Velcro to flap from front of the seat.

