

Look, usually our instructions are easy. But not these ones. You're gonna want to watch the install video.

We promise.

INSTALLATION GUIDE



65516 60/40 REAR BENCH WITH FOLDING ARMREST ANDS STORAGE

2019-2022 GMC/Chevrolet 1500
2020-2022 GMC/Chevrolet 2500-3500
Double and Crew Cab



BILL OF MATERIALS

ITEM	QUANTITY
40 Portion Bottom	1
60 Portion Bottom	1
Seat Back Cover	1
Headrest covers	3
Storage Door Covers	2
Center Armrest Cover	1

Watch the installation video at ttcovers.com/65516video

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.




*Basically, you break it, we buy it.
Seriously.*

Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.


Install Seat Bottom Cover

Step one - watch the video. Then recycle this booklet.

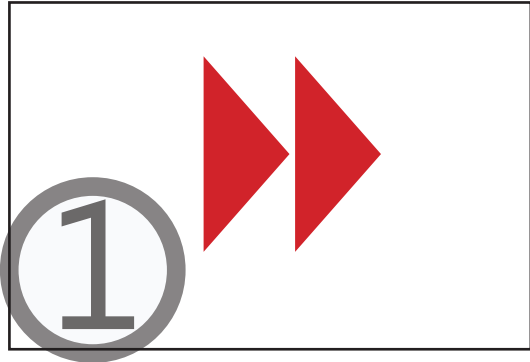


Slide the armrest cover over the center armrest, aligning the cupholders with the gap.

Start with the smaller portion bottom. Tip seat bottom up. Turn cover 3/4 of the way inside out. Slide over seat bottom.

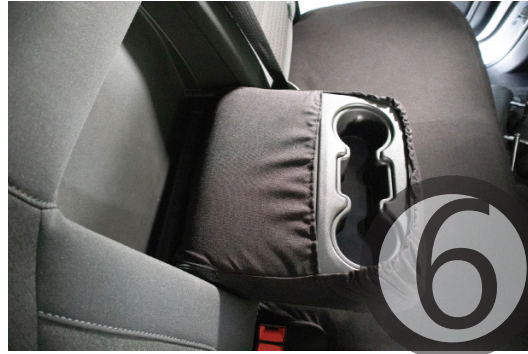

Run the flap behind it and secure together.

Push the velcro flap in between the seat back and bottom. Pull tight and fasten to the velcro on the bottom.

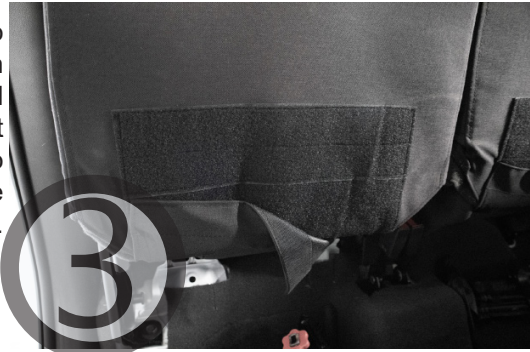

Slide the storage door covers over the storage doors.

Repeat on the other side.



Ensure that the door latch is through the hole in the cover. Fasten the three velcro flaps by the hinges together.

Install Seat Back Cover

Remove all three headrests. Unfold the seat back cover, undoing all the velcro. There are six holes along the top of the cover. Pass the cover behind the seatbelt with the headrest holes up.



Push the flaps at the bottom of the seat cover in between the seat back and bottom.

Push the headrest holes around the plastic headrest mounts, tucking the fabric under the mount to give it a finished look. This will help hold the cover in place as you instal the rest of it.




Tip the seat bottom up, and pull the flaps the rest of the way through. Pull taught and fasten to the carpet underneath the seat

Fasten the velcro around the headrest mount.




Wrap fabric around seat edge, pushing it around behind the foam of the seat.

Tuck the extra fabric along the top in between the foam of the seat and the metal frame.

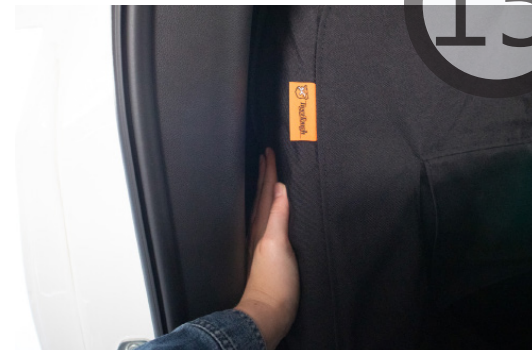

Open the storage doors.

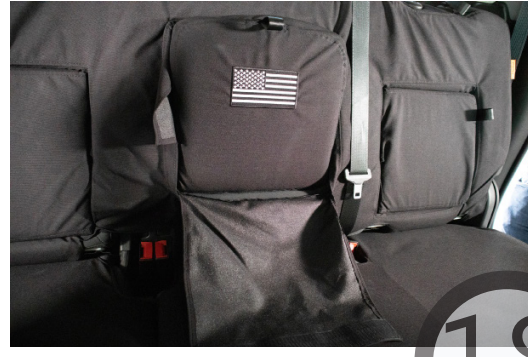

Run the long flap with velcro underneath the folding armrest.

Tuck the three flaps of fabric between the seat frame and seat foam.



Fasten to the flap at the top of the opening.

Install Headrest Covers

Re-insert headrests. Slide cover on. Tuck fabric around the plastic button for a finished look.



Fasten velcro underneath. For more detail on the middle headrest, see the install video.



