

# INSTALLATION GUIDE



## **92107 Bucket Set With Armrests**

NISSAN NV (2018-2019)



# BILL OF MATERIALS

ITEM	QUANTITY
Driver Seat Back Cover	1
Driver Seat Bottom Cover	1
Passenger Seat Back Cover	1
Passenger Seat Bottom Cover	1
Headrest Cover	2

Seat Backs & Bottoms have tag signifying Driver or Passenger.

**Ensure airbag patch (same side as the TigerTough tag) goes on the outside edge of the seat.**

Watch the install video here:  
[www.ttcovers.com/92107video](http://www.ttcovers.com/92107video)

## General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.  
Drip dry or machine tumble dry on a no heat cycle.  
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.



# 1 - Preparation





- 1.1 - Slide seat forward and raise to highest position, if possible. Tip seat back forward.
- 1.2 - Remove headrest by pressing in tabs at base of headrest and pulling up.

## 2 - Install Seat Back Cover



- ❑ 2.1 - Ensure the tag inside the cover corresponds with the seat you are working on.
- ❑ 2.2 - Turn seat cover 3/4 of the way inside out.
- ❑ 2.3 - Pull seat back cover into position, making sure that the holes in the cover align with the holes in the seat back.
- ❑ 2.4 - Stretch the cover over the headrest holes.
- ❑ 2.5 - Continue pulling the cover down the seat back, turning it right side out as you go.
- ❑ 2.6 - Attach Velcro flaps underneath of the armrest
- ❑ 2.7 - Push flap from front of cover between seat back and seat bottom, out the back of the seat .
- ❑ 2.8 - Double the end of the flap over to prevent the “hook” Velcro from sticking to the factory upholstery.
- ❑ 2.9 - Pull the flap tight and attach to the Velcro on the back of the seat.
- ❑ 2.10 - Fasten Velcro flap under armrest.

## 3 - Install Seat Bottom Cover

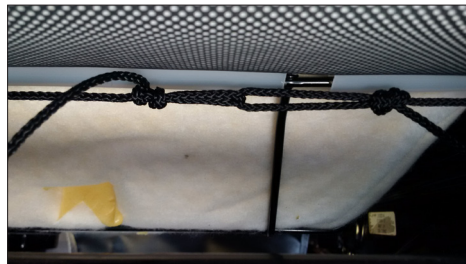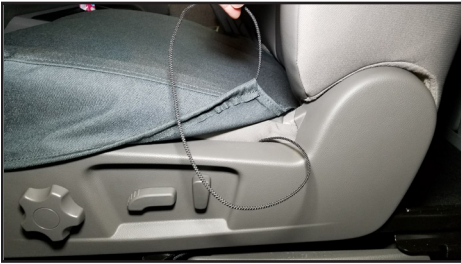

- 3.1 - Ensure the tag inside the cover corresponds with the seat you are working on.
- 3.2 - Place seat bottom cover over bottom of seat.
- 3.3 - Attach flap to the side of the seat closest to the middle by pressing the Velcro onto the side of the seat.
- 3.4 - Push outside string between seat bottom and plastic trim. Outside string will go through where the seat back and bottom meet. Inside string goes under and behind seat bottom.
- 3.5 - Pull strings tight.
- 3.6 - Tie a loop in one string, close to the edge of the seat.
- 3.7 - Run the other string through the loop, pulling as tight as possible. It is important to pull tight, as this keeps your cover from shifting. When the strings are pulled tight, tie string without the loop back on itself.
- 3.8 - Pull bottom flaps from front of seat bottom and attach to top flap. Flaps MUST run OVER bars and brackets under the seat.

## 4 - Install Headrest Covers



- 4.1 - Put headrests back on seats by pressing tabs in and pushing headrest into seat back.
- 4.2 - Pull headrest cover over headrest with the long flap in the front.
- 4.3 - Pull front flap over back and fasten.