

It's not rocket science,  
but following these  
instructions will make  
installing your seat covers  
a lot easier.

We promise.

E82201B BUCKET



# INSTALLATION GUIDE



## E82201B EQUIPMENT BUCKET

Komatsu PC88MR-10 Seat Cover



# BILL OF MATERIALS

ITEM	QUANTITY
Driver Seat Back Cover	1
Driver Seat Bottom Cover	1
Headrest Cover	1

## General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.  
Drip dry or machine tumble dry on a no heat cycle.  
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.





*Basically, you break it, we buy it.  
Seriously.*

**Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.**

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

# Install Seat Bottom Cover

Raise headrest to the highest position.



Secure velcro tabs under the armrest.



Undo all velcro on the cover. Slide the cover over the seat back.




Push velcro tabs between the seat back and bottom.



Pull cover all of the way down the seat back. Undo velcro flap around armrest.



Pull flaps tight and secure to the velcro at the back.

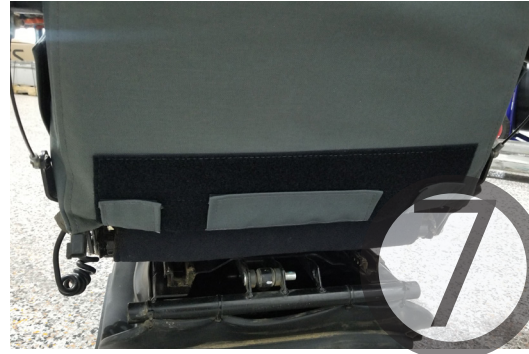

Secure the three velcro tabs under the headrest.



For assistance with installation, call us at 507.246.3545





# Seat Bottom & Headrest



Place the cover over the seat bottom. Push the velcro tabs between the seat back and seat bottom.



Make sure that the cover is not over top of the seat adjustment bar at the front of the seat.



Pull the flaps that you pushed between the back and the bottom tight, and secure them to the velcro behind the seat. The tighter you pull them the better the cover will fit.



Slide the headrest cover over the headrest and fasten the velcro at the bottom.

